

CAM520 Pro3

— User Manual —

Warning



- Hold the bottom of the camera with both hands to carry the camera.
Whether the camera is connected to power or not, do not grab any part of the lens or the lens holder to carry the camera or adjust pan and tilt.
- Do not drop the camera or subject it to physical shock.
- Ensure the power supply voltage is correct before using the camera.
- Do not place the camera where the cord can be stepped on as this may result in fraying or damage to the lead or the plug.
- To reduce the risk of fire or electric shock, do not expose the camera to rain or moisture.
Warranty will be voided if any unauthorized modifications are done to the camera.

Federal Communications Commission Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radiofrequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This Class A digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Caution

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

VCCI-A

この装置は、クラス A 機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

(注)本製品同梱の電源ケーブルは、本製品同梱の電源アダプタでのみ使用してください。
本製品同梱の電源ケーブルは、他の電気機器では使用できません。

사 용 자 안 내 문
이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전자파간섭의 우려가 있습니다.
※ 사용자 안내문은 "업무용 방송통신기자재"에만 적용됩니다.

기종별	사용자안내문
A 급 기기 (업무용 방송통신기자재)	이 기기는 업무용(A 급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.

遥控器电池安全信息

- 请将电池存放在凉爽与干燥的位置。
- 不要将电量用尽的电池弃置在家庭废弃物中。请将电池弃置在特定回收处，或送回原购买的商店。
- 如果长时间不使用电池，请将其取出。电池漏液与腐蚀可能会损坏遥控器，请以安全方式弃置电池。
- 不可混用新旧电池。
- 不可混用不同类型的电池：碱性、标准（碳锌）或可充电（镍镉）电池。
- 不可将电池弃置于火源中。
- 请勿尝试让电池端子短路。

DISCLAIMER

No warranty or representation, either expressed or implied, is made with respect to the contents of this documentation, its quality, performance, merchantability, or fitness for a particular purpose.

Information presented in this documentation has been carefully checked for reliability; however, no responsibility is assumed for inaccuracies. The information contained in this documentation is subject to change without notice.

In no event will AVer Information Inc. be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use this product or documentation, even if advised of the possibility of such damages.

TRADEMARKS

“AVer” is a trademark owned by AVer Information Inc. Other trademarks used herein for description purpose only belong to each of their companies.

COPYRIGHT

©2024 AVer Information Inc. All rights reserved. | January 22, 2024

All rights of this object belong to AVer Information Inc. Reproduced or transmitted in any form or by any means without the prior written permission of AVer Information Inc. is prohibited. All information or specifications are subject to change without prior notice.

More Help

For FAQs, technical support, software and user manual download, please visit:

Headquarters

Download Center: <https://www.aver.com/download-center>

Technical Support: <https://www.aver.com/technical-support>

USA Branch Office

Download Center: <https://www.averusa.com/business/support>

Technical Support: <https://averusa.force.com/support/s/contactsupport>

Europe Branch Office

Download Center: <https://www.avereurope.com/download-center>

Technical Support: <https://www.avereurope.com/technical-support>

Contact Information

Headquarters

AVer Information Inc.

<https://www.aver.com>

8F, No.157, Da-An Rd., Tucheng Dist., New Taipei City 23673, Taiwan

Tel: +886 (2) 2269 8535

USA Branch Office

AVer Information Inc., Americas

<https://www.averusa.com>

668 Mission Ct., Fremont, CA 94539, USA

Tel: +1 (408) 263 3828

Toll-free: +1 (877) 528 7824

Technical support: support.usa@aver.com

Europe Branch Office

AVer Information Europe B.V.

<https://www.avereurope.com>

Westblaak 134, 3012 KM, Rotterdam, The Netherlands

Tel: +31 (0) 10 7600 550

Technical support: eu.rma@aver.com

Japan Branch Office

アバー・インフォメーション株式会社

<https://jp.aver.com>

〒160-0023 日本東京都新宿区西新宿 3-2-26 立花新宿ビル 7 階

Tel: +81 (0) 3 5989 0290

テクニカル・サポート: <https://jp.aver.com/technical-support>

Vietnam Branch Office

Công ty TNHH AVer Information (Việt Nam)

Tầng 5, 596 Nguyễn Đình Chiểu, P.3, Quận 3,

Thành phố Hồ Chí Minh 700000, Việt Nam

TEL: +84 (0)28 22 539 21

Contents

Warning	2
Overview	1
Package Contents	1
Optional Accessories*	1
Pan and Tilt Angle	2
Parts Info	3
LED Indicator	3
Remote Control	4
Shortcuts	5
Connection	6
Device Connection	6
Power Connection	7
HDMI Connection	7
RS-232 Connection	8
RS-232 Port Pin Definition	8
Computer/Keyboard Controller and Camera Connection	9
Camera Cascade Connection	12
Installation	14
Wall Mount Installation	14
Ceiling Mount Installation	17
Secure the Cables	19
Get Started	20
Make a Video Call	20
Web Interface	21
Access the Web Interface	21
AVer IP Finder	21
PTZApp 2	22


PTZ Control	23
Overview of PTZ Control.....	23
Save, Load and Clear a Preset	24
Add and Delete Available Presets (Presets 10-127)	24
Setting	25
Overview of the Floating Live View	28
Tracking Mode	29
Video Format	30
Network	31
System.....	32
PTZApp 2.....	34
Install PTZApp 2	34
Open and Quit PTZApp 2	34
USB Devices	35
Overview of the USB Devices page	35
Overview of the Camera Card	36
Overview of the Floating Live View	37
Virtual Stream	38
EZLive.....	39
Use AVer EZLive	39

Overview


Package Contents



Camera




Power Adapter & Power Plug*




Remote Control



USB 2.0 Type-B to Type-A Cable (5m)



Mini Din 9 to Mini Din 8 RS-232 Adapter Cable



Wall Mount Bracket (x2)



M4 x 8mm Wall Mount Screw (x2)




1/4\"-20 L=7.5mm Tripod Screw (x2)




Drill Template

*The power plug may vary based on the country or region where sold.


Optional Accessories*



HDMI Cable (3m)



Mini Din 8 to D-Sub 9 Cable




Foldable TV Mount




Ceiling Mount (Upside Down Installation)

*Optional Accessories will vary depending on the country where it is sold.

Pan and Tilt Angle

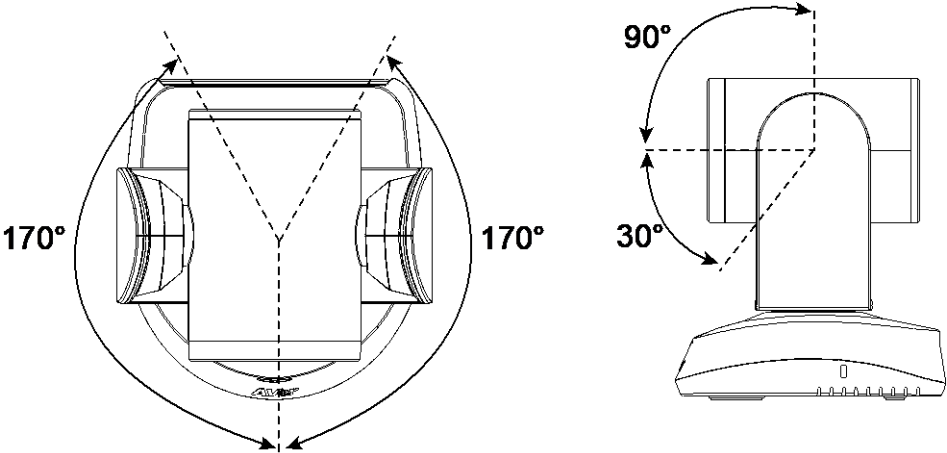

Parts Info

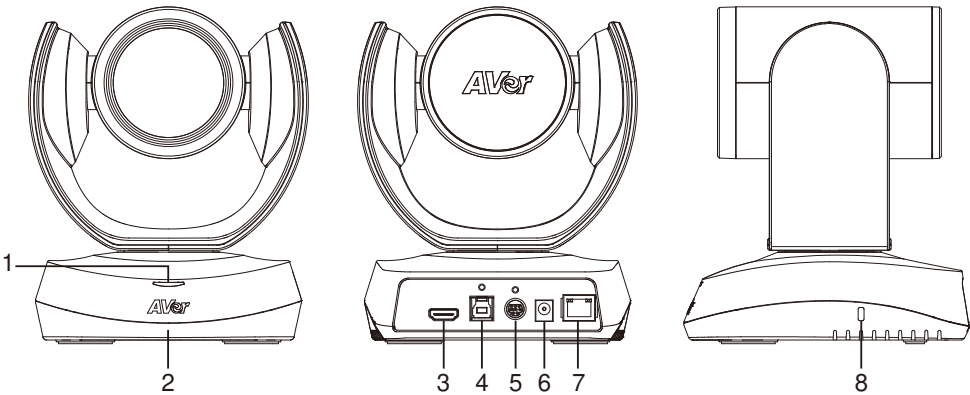

1. Status LED

2. IR Sensor
3. HDMI Port

4. USB 3.1 Type B Port

5. RS-232 In/Out Port

6. DC Power Jack





7. PoE Port*
8. Kensington Lock

*Power over Ethernet (PoE), compatible with IEEE 802.3AT. Please use CAT 5e FTP cable (not included).

LED Indicator

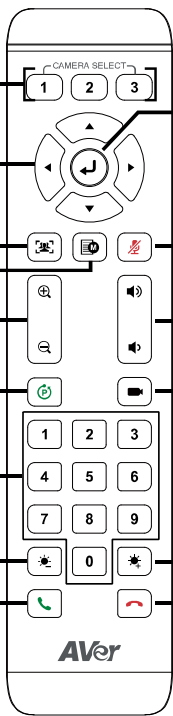








Color	Status
Solid red	Start-up
Solid orange	Standby
Solid blue	Video on

Remote Control

		Name	Function
	1.	Camera Select	<p>No selection is required by default to operate the camera.</p> <ul style="list-style-type: none"> ● Camera Binding is turned off by default and all three selections can operate the camera. ● To specify a number, go to Setting > Camera Binding on the web interface or in PTZ App2.
	2.	Directional Pad	Press once for incremental movement or press and hold for continuous pan or tilt.
	3.	SmartFrame	<p>Short press to frame entire group on screen and remove excess space. Long press to switch between tracking modes.</p> <p>Note:</p> <ul style="list-style-type: none"> ● The SmartFrame icon  appears on video when turned on. To hide the icon, go to the Setting tab > On-Screen Menu > Off on the web interface or in PTZ App2. ● The effective distance is up to 7-10 meters. ● AI functions will be turned off if pan, tilt and zoom controls are used.
	4.	OSD Menu	Short press the button to open OSD menu during HDMI output.
	5.	Zoom In/Out	Increase / Decrease the camera zoom.
	6.	Preset	<ul style="list-style-type: none"> ● To save a preset: Press and hold the Preset button  until the save message appears on screen and release, then short press the Number Pad (0-9). ● To load a preset: Press and hold the Preset button  and release, then short press the Number Pad (0-9).
	7.	Number Pad	
	8.	Brightness -	Decrease the brightness.
	9.	Call/Answer	Answer a call or start a call.
	10.	Enter	N/A
	11.	Mute	N/A
	12.	Volume	N/A
	13.	Load Preset	With each press, cycle through defined presets.


	14. Brightness +	Increase the brightness.
	15. Hang Up	End the call.

Shortcuts

Press and Hold	To
 for 2 sec	Turn wide dynamic range (WDR) on or off.
 for 2 sec	Turn SmartFrame on or off.
 for 2 sec	Turn RTMP streaming on or off when RTSP and RTMP are turned on.
 for 2 sec	Enter sleep mode.
 for 6 sec	Reboot.
 for 2 sec and release, then press 	Turn Preset Link Set 1 on or off.
 for 2 sec and release, then press 	Turn Preset Link Set 2 on or off.

Connection

Device Connection

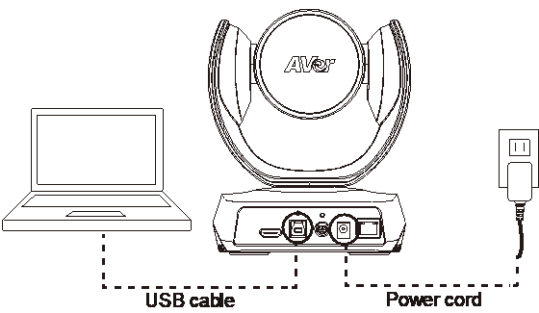


- Use the included USB cable.
- The USB 3.1 port is compatible with USB 2.0.


Maximum resolution/fps for USB 2.0 and USB 3.1 ports:

USB 2.0		USB 3.1		HDMI
YUV	M-JPEG	YUV	M-JPEG	
- 640x480 or less, up to 30fps - 720p, up to 10fps	- 1080p/60fps	- Up to 1080p/30fps - 720p/60fps	- 1080p/60fps	- 1080p/60fps - 1080p/30fps

Power Connection

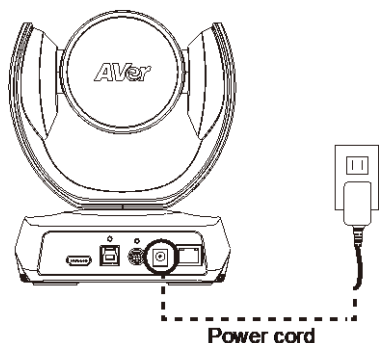

Connect the included power adapter and power cord to a wall outlet.

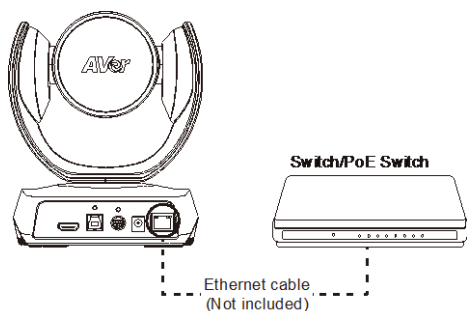


Or connect a CAT 5e FTP cable (not included) to the PoE Switch or Ethernet.

- PoE port is compatible with IEEE 802.3at.
- When streaming over IP, use a CAT 5e FTP cable (not included) for a smooth video.


HDMI Connection

Connect with TV or monitor through the HDMI port to display camera video on the screen.

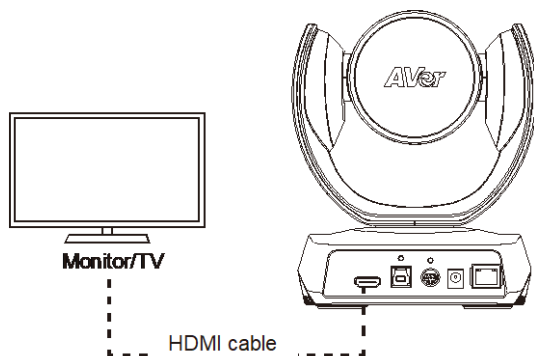

RS-232 Connection

RS-232 Port Pin Definition




Function	Mini DIN9 PIN #	I/O Type	Signal	Description
VISCA IN	1	Output	DTR	Data Terminal Ready
	2	Input	DSR	Data Set Ready
	3	Output	TXD	Transmit Data
	6	Input	RXD	Receiver Data
VISCA OUT	7	Output	DTR	Data Terminal Ready
	4	Input	DSR	Data Set Ready
	8	Output	TXD	Transmit Data
	9	Input	RXD	Receiver Data
	5	---	---	Not connect

Computer/Keyboard Controller and Camera Connection

Direct Connection

If users do not use AVer RS-232 adapter cable, please refer to the pin connection shown below.

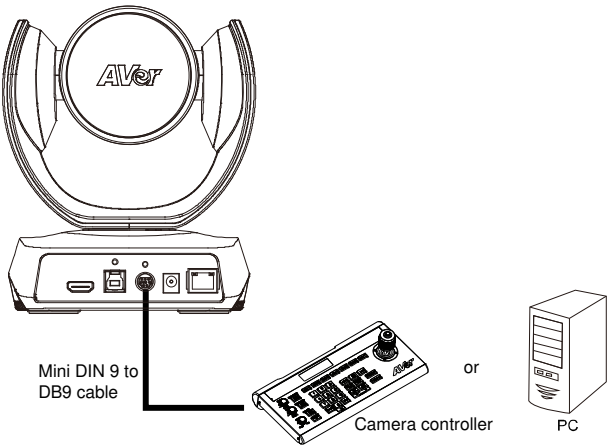

Mini DIN9

Camera


- 1. DTR (IN)
- 2. DSR (IN)
- 3. TXD (IN)
- 6. RXD (IN)
- 7. DTR (OUT)
- 4. DSR (OUT)
- 8. TXD (OUT)
- 9. RXD (OUT)

DB9

Camera controller, PC

- 6. DSR
- 4. DTR
- 2. RXD
- 3. TXD
- 1. DCD
- 5. GND
- 7. RTS
- 8. CTX
- 9. RI

Use the supplied RS-232 mini DIN 9 to mini DIN 8 cable

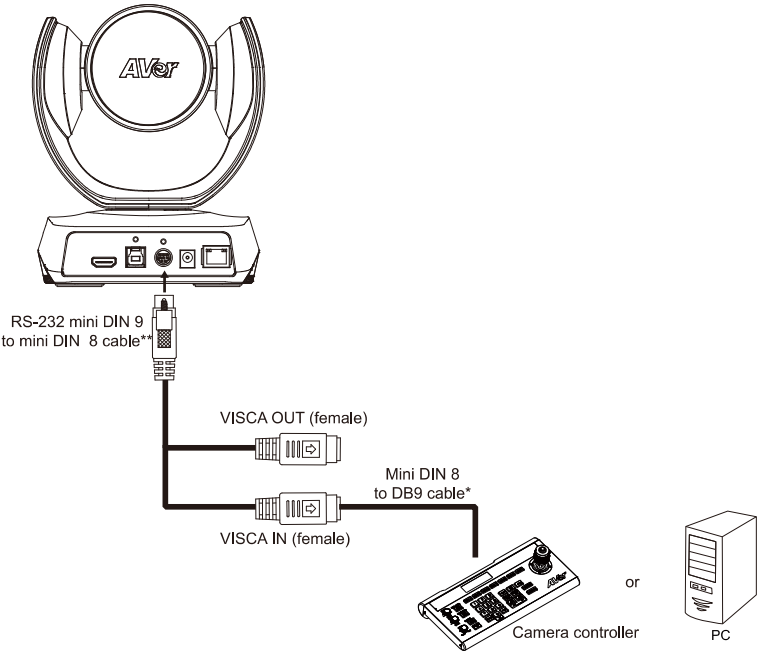

DB9

Camera controller, PC

- 1. DCD
- 2. RXD
- 3. TXD
- 4. DTR
- 5. GND
- 6. DSR
- 7. RTS
- 8. CTX
- 9. RI


Mini DIN8

Camera


- 6. GND (IN)
- 3. TXD (IN)
- 5. RXD (IN)
- 2. DSR (IN)
- 4. GND (IN)
- 1. DTR (IN)
- 1. DTR (OUT)
- 2. DSR (OUT)
- 3. TXD (OUT)
- 4. GND (OUT)
- 5. RXD (OUT)
- 6. GND (OUT)

* Mini DIN 8 to D-Sub 9 (DB9) cable is an optional item.

**** RS-232 mini DIN 9 to mini DIN 8 Cable Pin Definition**

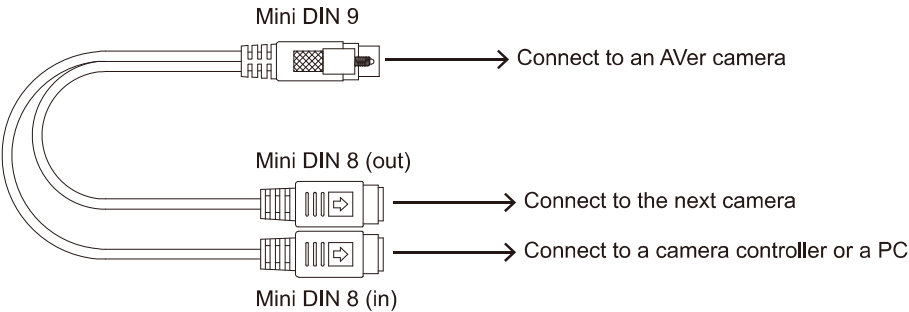

Mini DIN 8 Pin Definition




No.	Pin
1	DTR
2	DSR
3	TXD
4	GND
5	RXD
6	GND
7	NC
8	NC

Camera Cascade Connection

Direct Connection

If users do not use AVer RS-232 adapter cable, please refer to the pin connection shown below for cascading cameras.

Total can connect up to 7 cameras.

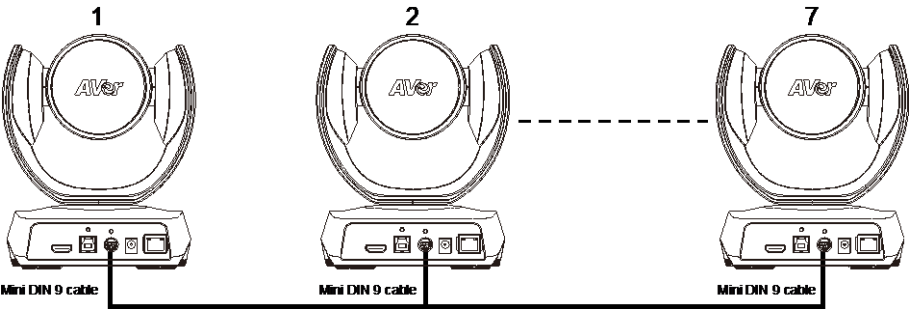

Mini DIN9

Camera 1

- 1. DTR (IN)
- 2. DSR (IN)
- 3. TXD (IN)
- 6. RXD (IN)
- 7. DTR (OUT)
- 4. DSR (OUT)
- 8. TXD (OUT)
- 9. RXD (OUT)
- SHIELD

→

Mini DIN9

Camera 2


- 7. DTR (OUT)
- 4. DSR (OUT)
- 8. TXD (OUT)
- 9. RXD (OUT)
- 2. DSR (IN)
- 1. DTR (IN)
- 6. RXD (IN)
- 3. TXD (IN)
- SHIELD

Use the RS-232 mini DIN 9 to mini DIN 8 cable

Total can connect up to 7 cameras.

To facilitate the camera cascade, users can use AVer RS-232 adapter cable.

Connect camera with AVer mini DIN 9 to mini DIN 8 adapter cable. Connect the mini DIN 8 female side to male mini DIN 8 Visca cable (Users have to buy it in the market) and then connect AVer mini DIN 9 to mini DIN 8 adapter cable again to connect to next camera.

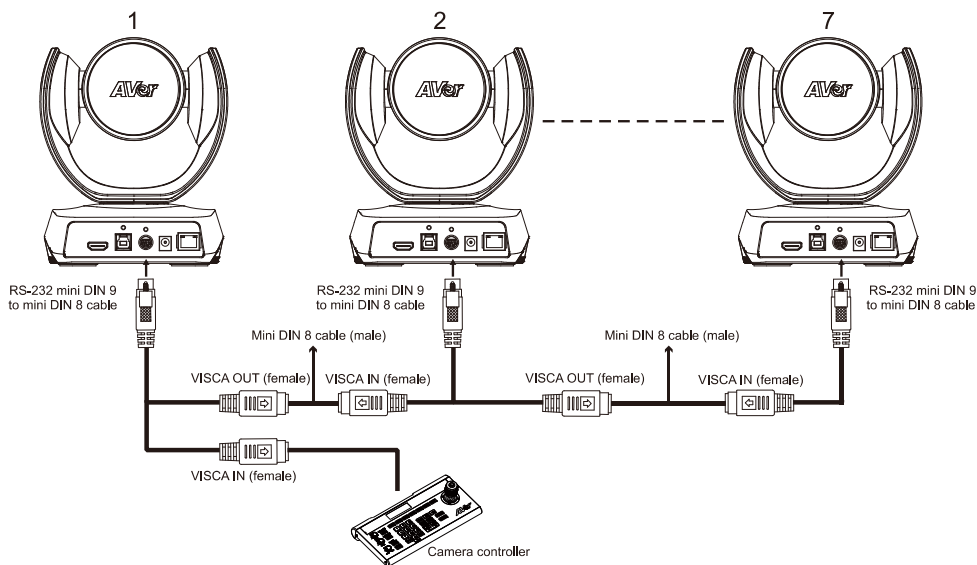

Mini DIN8

Camera 1

1. DTR (IN)
2. DSR (IN)
3. TXD (IN)
4. GND (IN)
5. RXD (IN)
6. GND (IN)

Mini DIN8

Camera 2


1. DTR (OUT)
2. DSR (OUT)
3. TXD (OUT)
4. GND (OUT)
5. RXD (OUT)
6. GND (OUT)

- | | | |
|--------------|---|-------------|
| 1. DTR (OUT) | → | 2. DSR (IN) |
| 2. DSR (OUT) | → | 1. DTR (IN) |
| 3. TXD (OUT) | → | 5. RXD (IN) |
| 4. GND (OUT) | → | 4. GND (IN) |
| 5. RXD (OUT) | → | 3. TXD (IN) |
| 6. GND (OUT) | | 6. GND (IN) |

Installation

Wall Mount Installation

1. Use the drilling paper included in the package to drill the holes in the wall where the user wants to mount the camera.

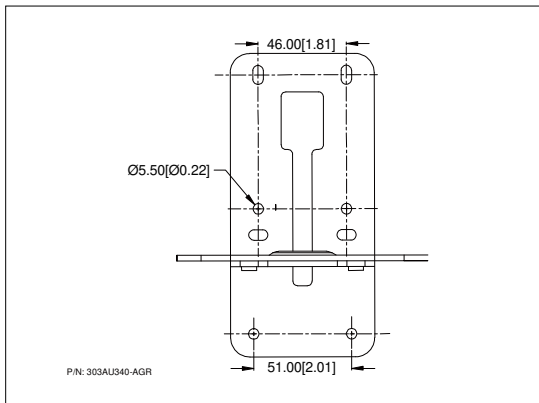


2. Use the screws (not included) to secure the L-mount bracket **A** on the wall.

Screw


For Cement wall: M4 x20mm self-tapping screws (x4) + Plastic conical anchor

For Wooden wall: M4 x20mm self-tapping screws (x4)

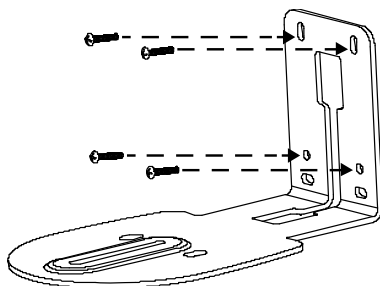

3. Then, assemble the L-mount brackets **A** + **B** with screws (included in package).

Screw size:  M4 x8mm (x2)

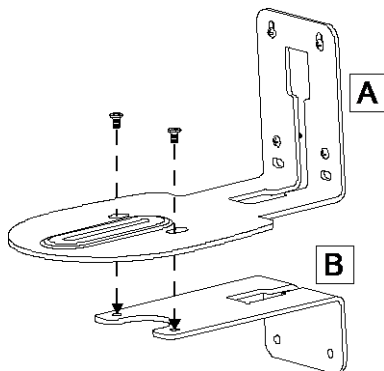


4. After assembling the L-mount brackets, use the screws (not included) to secure the lower part of L-mount brackets on the wall.


Screw

For Cement wall: M4 x20mm self-tapping screws (x2) + Plastic conical anchor


For Wooden wall: M4 x20mm self-tapping screws (x2)

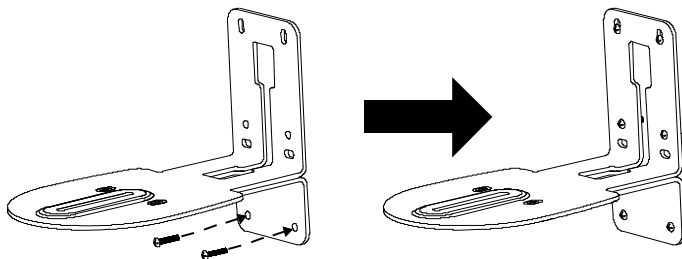


5. Pass the cables through the hole on the L-mount bracket and connect the cables to corresponding connection ports.

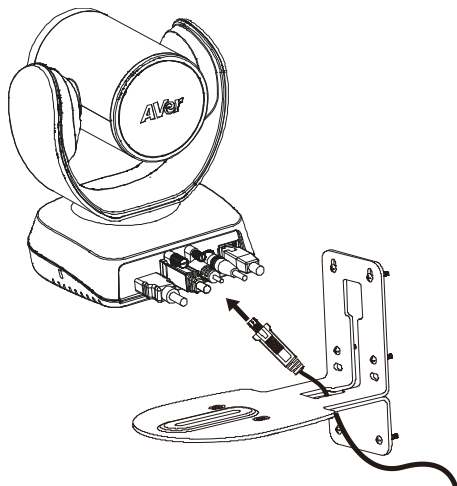


6. Use the remaining screws (included in package) to secure the camera on the L-mount bracket.

Screw:  1/4"-20 L=7.5mm (x2)

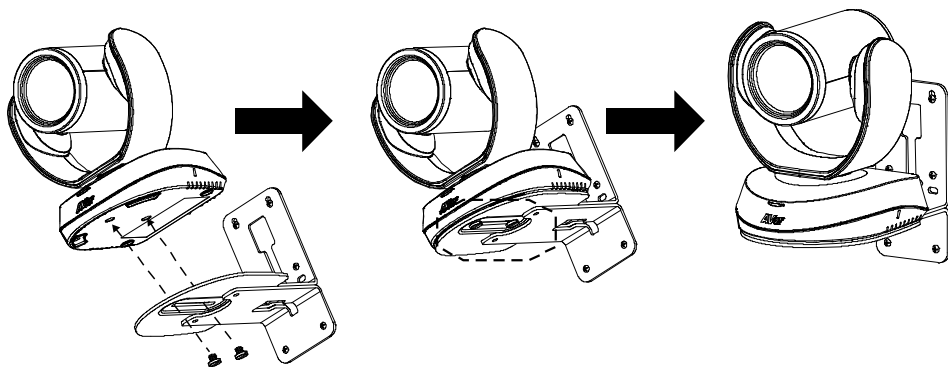


Ceiling Mount Installation


1. Install the provided screw underneath the camera but do not tighten.

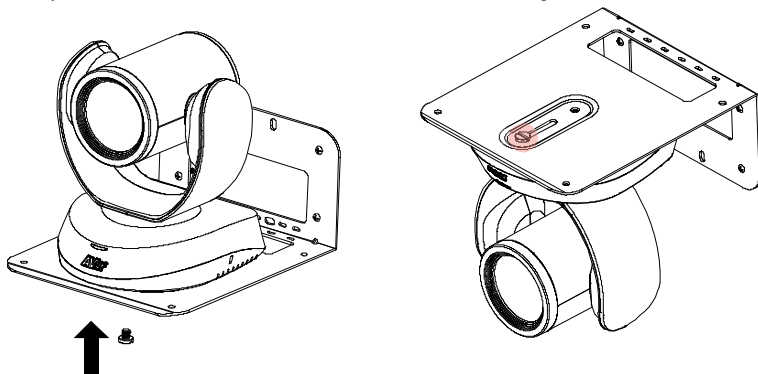


2. Turn the camera to right side.

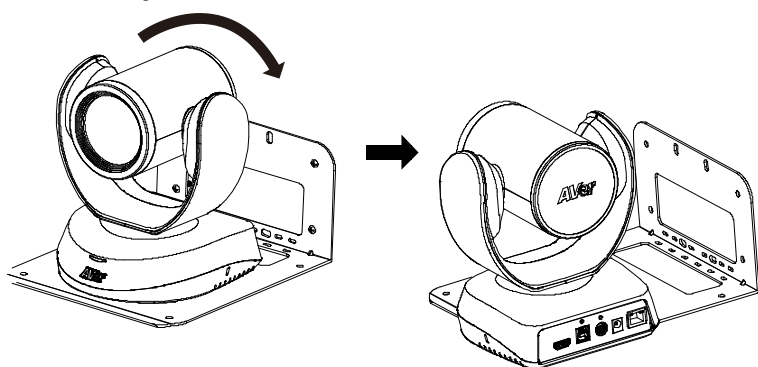


3. Pass cables through A or B hole first. Connect cables with camera.

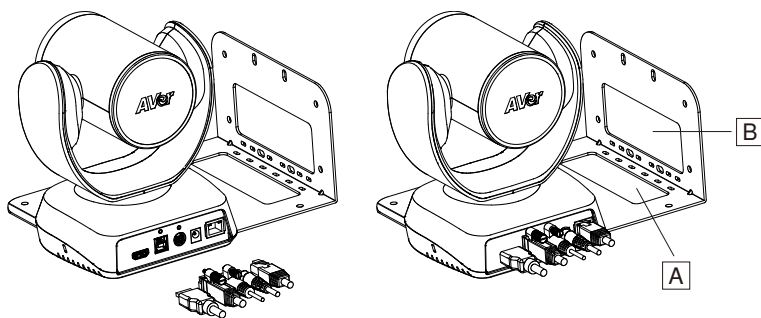

4. Turn the camera to face the front side. Install the second screw and tighten both screws.

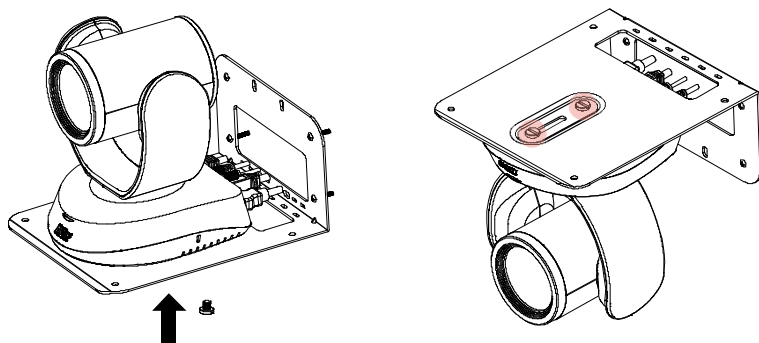


5. Find suitable screws to fix the camera mount to the ceiling.

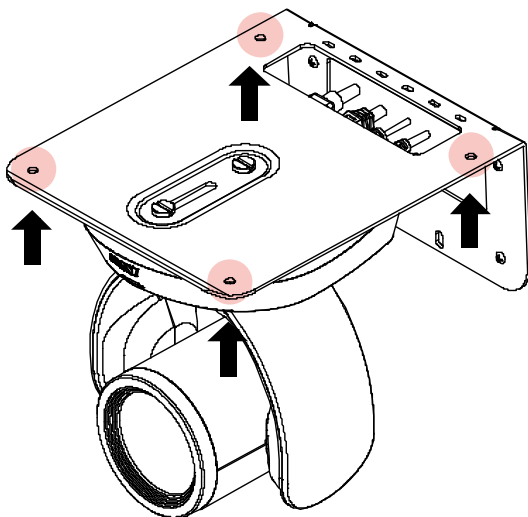

Secure the Cables

Plug in your USB cable or RS-232 cable and tighten the cable screw to secure.

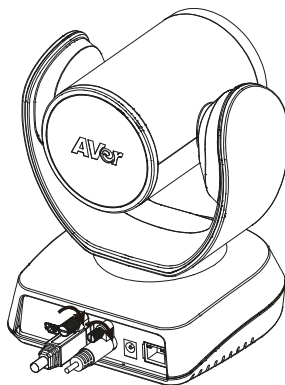

Get Started

Make a Video Call

The CAM520 Pro3 is a plug-n-play camera.


1. Connect your CAM520 Pro3 to a computer using the included USB cable.
2. Open your video conferencing software such as Microsoft® Teams, Skype and Zoom.
3. Set the CAM520 Pro3 as your primary camera on your video conferencing software.

Web Interface

Access the Web Interface


- You can access your camera's web interface and change the default static IP to DHCP using the following software:
 - AVer IP Finder
 - PTZApp 2
- Recommended browser: Chrome 76 and above, Firefox 69 and above.

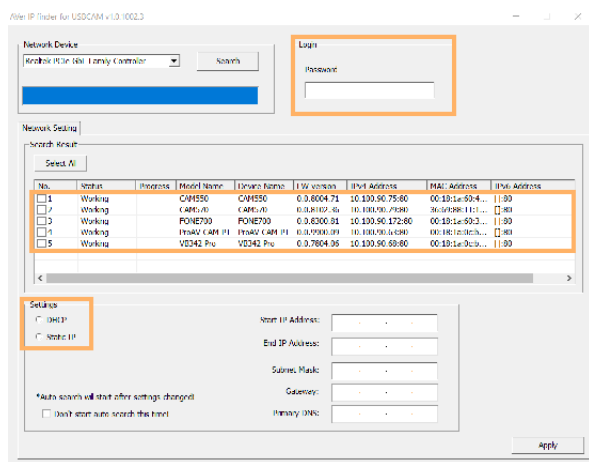

AVer IP Finder




1. Download and install AVer IP Finder to your computer from AVer Download Center. (<https://www.aver.com/download-center>).
2. Make sure your camera and computer are connected to the same network.
3. Open AVer IP Finder. Click **Search**.
4. To change the default static IP **192.168.1. 168** to DHCP, select your camera's checkbox from the list of devices.
5. Enter the default password **aver4321**.
6. Select **DHCP**.
7. Click **Apply**. AVer IP Finder will search for devices again and your camera's IP address will change.
8. Double-click on your device row to access the web interface.
9. For first-time login, enter the default password **aver4321**. You'll be prompted to set up a new account and password.
 - Use 6-10 characters, upper and lowercase letters, numbers and special characters (* ! % + = , - _ ^ / @ . ~).
 - If you forgot your password, use PTZApp 2 to reset the password to the default password **aver4321**.

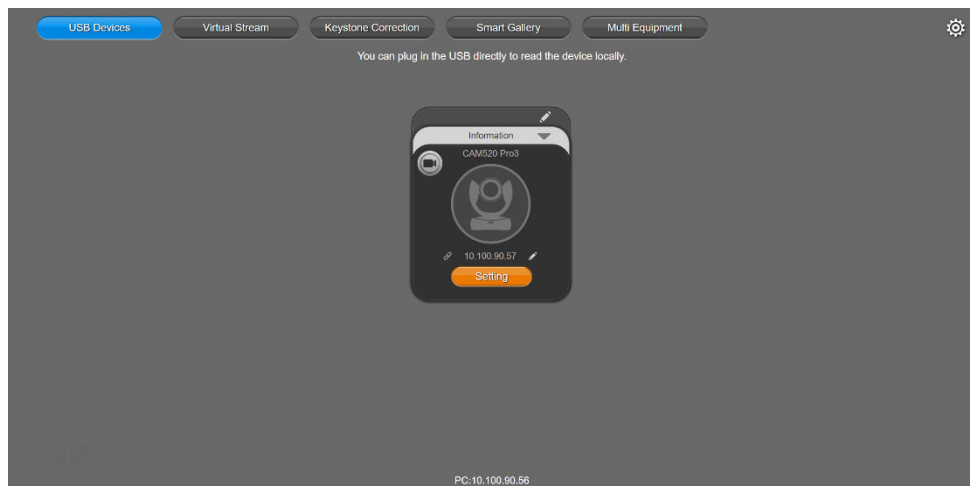PTZApp 2




1. Download and install PTZApp 2 to your computer from AVer Download Center.
(<https://www.aver.com/download-center>).
2. Make sure your camera and computer are connected to the same network.
3. Double-click the PTZApp 2 icon  to open PTZApp 2 in your browser.
4. Connect your camera to your computer using the included USB cable. When PTZApp 2 detects a USB-connected camera, a camera card will appear under the **USB Devices** page.
5. Click the pencil icon  on the camera card to change the default static IP **192.168.1. 168** to DHCP.
6. Select **DHCP** and click **Confirm**.



7. Click the link icon  on the camera card to access the web interface.
8. For first-time login, enter the default password **aver4321**. You'll be prompted to set up a new account and password.
 - Use 6-10 characters, upper and lowercase letters, numbers and special characters (* ! % + = , _ ^ / @ . ~).
 - If you forgot your password, use PTZApp 2 to reset the password to the default password **aver4321**.

PTZ Control

Overview of PTZ Control

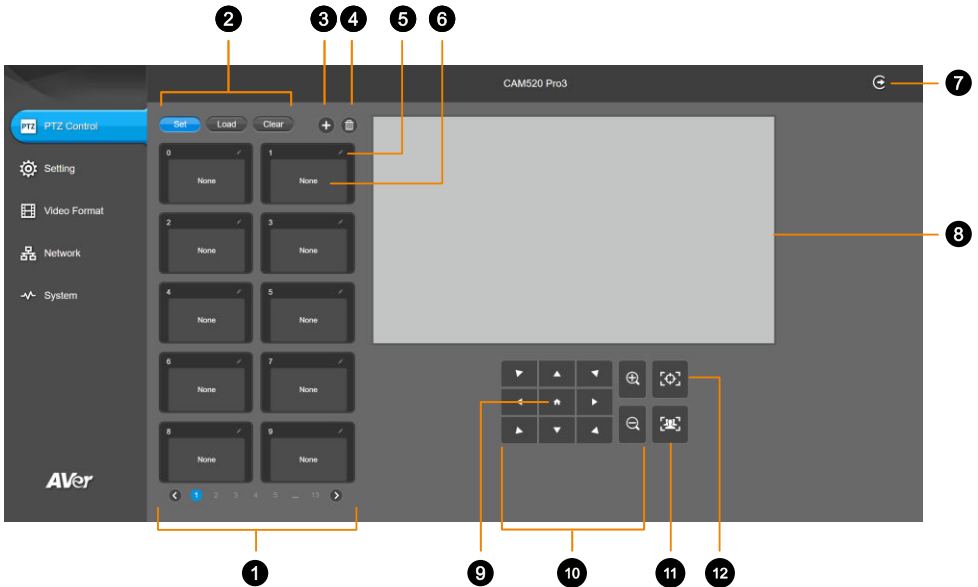

1. Presets 0-9

2. Preset Function Buttons

Save, load and clear a preset.

3. Add Available Presets

There are 10 available presets 0-9 by default. Click the plus icon to add up to 128 available presets.

4. Delete Available Presets

Click a trashcan icon to delete available presets.

5. Name

Click the pencil icon to name a preset.

6. Preset Thumbnail

7. Log Out

Log out of your account and close the web interface.


8. Live View


9. Pan-Tilt Reset

Reset the pan-tilt position to the center.

10. Directional Pad and Zoom

11. SmartFrame

Click the SmartFrame icon  to frame entire group on screen and remove excess space.

Note: The SmartFrame icon  appears on video when turned on. To hide the icon, go to the **Setting** tab > **On-Screen Menu** > **Off** on the web interface.

12. One-Touch Focus

Click to autofocus once.

Save, Load and Clear a Preset




To save a preset:

1. Use the pan, tilt and zoom controls to position your camera.
2. Select **Set**, then a preset number to save that position.
3. Select **Yes** when prompted. A thumbnail of your preset will appear.

Add and Delete Available Presets (Presets 10-127)

There are 10 available presets 0-9 by default.
Click the plus icon to add up to 128 available presets, or click the trashcan icon to delete available presets.

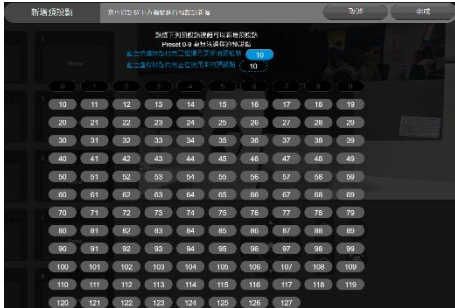

Add



Delete

To add an available presets:

1. Select the plus icon, then select the preset numbers you want to add.
2. Select **Done**.

To delete an available preset:

1. Select the trashcan icon, then select the preset numbers you want to delete.
2. Select **Done**.

Setting

PTZ Control

Setting

Video Format

Network

System

CAM520 Pro3

Camera

Tracking Mode

OffManual FrameAuto FramePreset FramingSmart Composition

Note : Preset Framing
While one person walks through each preset point (ex: 1~4), camera will track the area automatically.
Note : Smart Composition
Frame up to 9 people, when 10 or above appears in the image, camera will return to wide view.

Camera Moving Speed

Slow SpeedMiddle SpeedHigh Speed

Framing Speed

Slow SpeedMiddle SpeedHigh Speed

Framing Size

NarrowMediumWide

Smart Frame Preset Point

Central Of The Screen ImagePreset0Preset1Preset2Preset3Preset4

Preset5Preset6Preset7Preset8Preset9

Note : Choose a preset point so that camera can detect participants from the wide view of the assigned preset area direction.

Auto Focus

PTZContinuous

Camera Focus

ManualAuto

Home Position

Last Operation PositionFactory Center PositionPreset 0

Sleep Position

Factory Downside PositionPreset 9

Sleep Timer

Off10 sec5 min10 min20 min

On Screen Menu

OffOnLoad Preset Off

Camera Blinding

OffCamera1Camera2Camera3

Note : When Off, no matter you press camera 1 or 2, 3 button on the remote control, you can control all the AVer USB camera around you.

Save Preset

OffOn

Note : While enabling this function, it will adjust related parameter to increase the compatibility to MT300, inclusive of lowering the bit rate of UVC video output.

Integration Booster for AVer MT300


OffOn

AVer

Camera

Item	Description
Tracking Mode	Select a tracking mode. Refer to < Tracking Mode > for details.
Camera Moving Speed	Select a camera moving speed.
Framing Speed	Select a duration before auto frame. <ul style="list-style-type: none"> ● Slow: 5 seconds before auto frame. ● Middle: 3 seconds before auto frame. ● High: 1 second before auto frame.
Framing Size	Select a framing size to include or remove excess space on either side of the subject.
SmartFrame Preset Point	Select a position as the detection area when using SmartFrame to frame entire group on screen.
Autofocus	Automatically focus after each pan, tilt and zoom, or automatically focus continually.
Camera Focus	Adjust the focal length manually by dragging the slider or automatically.
Home Position	Select a home position that your camera moves to when powered on.
Sleep Position	Select a home position that your camera moves to when entering standby mode.
Sleep Timer	Set a duration before standby mode. <ul style="list-style-type: none"> ● When transmitting video over USB, RTSP or RTMP, the camera won't enter standby mode.
On-Screen Menu	Turn On-Screen Menu on or off. <ul style="list-style-type: none"> ● Load Preset Off: Displays all statuses except load preset.
Camera Binding	No setup is required to operate the camera. <ul style="list-style-type: none"> ● When camera binding is turned off (default), all selections on the remote control can operate the camera. ● Or select Camera 1-Camera 3 to assign the camera to a camera select button 1-3 on the remote control.
Save Preset	Turn Save Preset on or off. <ul style="list-style-type: none"> ● When Save Preset is turned off, you won't be able to save presets using the remote control, web interface, hotkeys or VISCA commands.
Integration Booster for AVer MT300	Turn on to improve compatibility with AVer MT300 Matrix Tracking Box and reduce latency by lowering bit rate.

Image

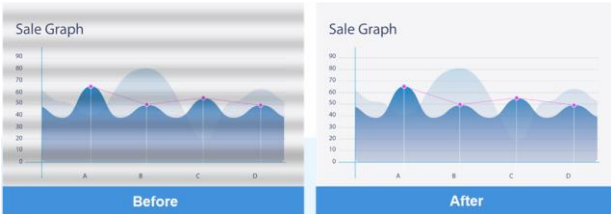
Item	Description
Image Flip	Flip the image vertically.
Image Mirror	Flip the image horizontally.
WDR	Turn wide dynamic range (WDR) on or off.
Flicker Decrease on IFP / Monitor	Turn Flicker Decrease on IFP / Monitor on or off. 
Frequency	Select a frequency.
White Balance	Select a white balance setting: <ul style="list-style-type: none"> ● Manual: Adjust the white balance manually by dragging the slider. ● Auto: Adjust the white balance automatically.
Noise Reduction	Adjust noise reduction level.
Brightness	Adjust brightness level.
Sharpness	Adjust sharpness level.
Saturation	Adjust saturation level.
Low Light Compensation	Turn Low Light Compensation on or off.
Low Resolution under 720p (except 848*480)	Enable to transmit video in 720p or lower.
Enlarge Total Zoom Up to 36x	Enable or disable Enlarge Total Zoom Up to 36x. The default is 24X.
Video Frame Rate	Select a video frame rate.

RS-232

Item	Description
ADDR	Select your settings to set up an RS-232 connection.
Baud Rate	
Protocol	
VISCA over IP	

Overview of the Floating Live View

- The floating live views opens automatically in the **Setting** tab.
- To open the floating live view again after closing, click on the video recorder icon on top of **Setting**, **Video Format**, **Network** and **System** tabs.

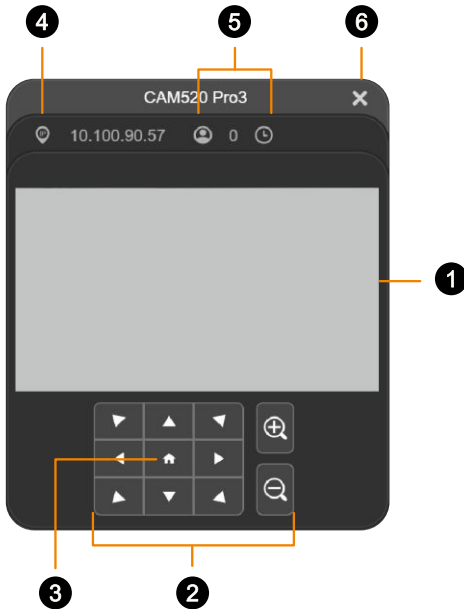

1. Live View

2. Directional Pad and Zoom

3. Pan-Tilt Reset

Reset the pan-tilt position to the center.

4. IP Address

5. Head Count and Video Transmission Duration


Click the head count icon to display head count and the duration of your video transmission. Click the icon again to hide the information.


6. Close

Click the X icon to close the floating live view and stop transmitting video.

Tracking Mode

Manual Frame

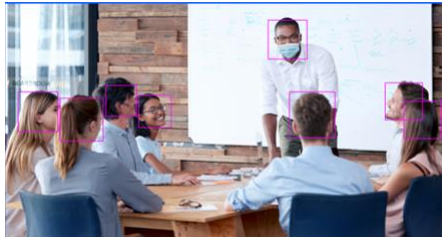

Frames manually using the SmartFrame button  to frame entire group on screen once.

Auto Frame



Frames entire group on screen automatically. If no one is in view, the camera will default to preset 0.

- The camera auto frames every time a subject enters or leaves the screen.
- If Auto Frame happens too frequently, set a duration before auto frame in the **Setting** tab > **Framing Speed**.


Preset Framing



Frames the presenter in real time as they move using presets. If no one is within the presets, the camera will default to group framing.

- Make sure you have defined presets. Presets 1-9 are available. Preset 0 defaults to the home position.
- Define overlapping presets for a smooth transition. When the presenter exits the previous preset, the camera will follow and move to the next preset.
- When multiple presenters are within presets, the preset with the smaller number takes priority.


Smart Composition

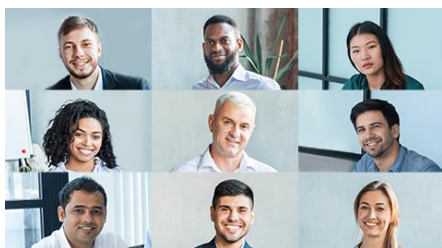

Creates a close-up frame for each participants and present them in a single stream composited gallery.

- Smart Composition frames up to 9 people. If more than 9 are in view, the camera will default to group framing.
- You can set a detection area for Smart Composition in the **Setting** tab > **SmartFrame Preset Point**.

Video Format

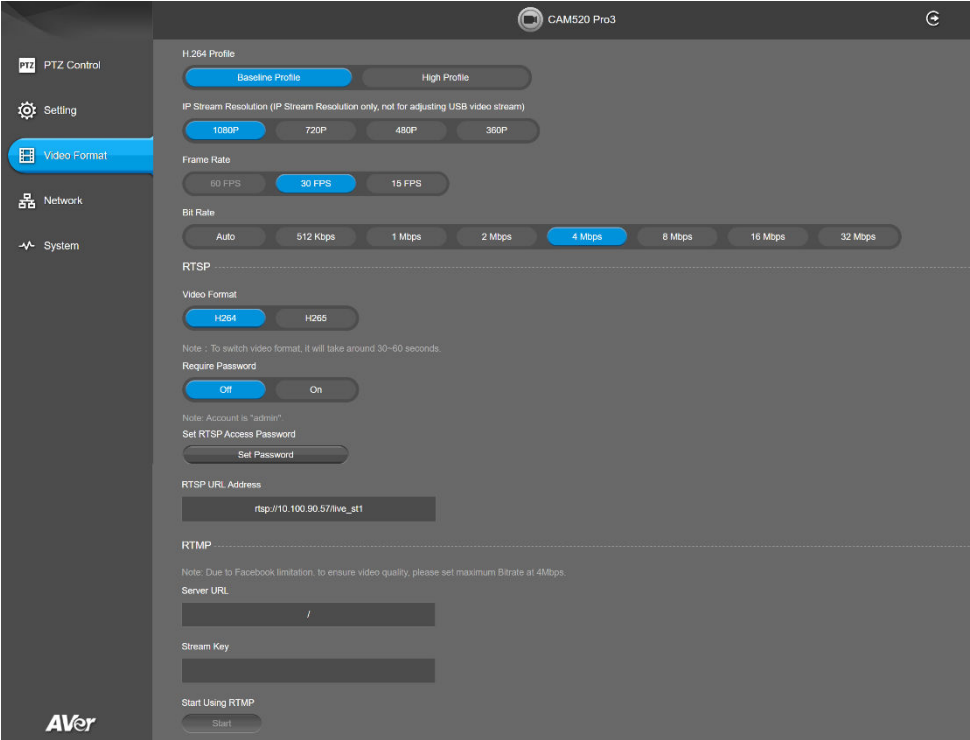

Item	Description
H.264 Profile	Select a profile for streaming live.
IP Stream Resolution	Select a resolution for streaming over IP.
Frame Rate	Select a frame rate.
Bit Rate	Select a bit rate. <ul style="list-style-type: none">● To live stream on Facebook, we recommend a bit rate under 4Mbps.

RTSP and RTMP

Item	Description	
RTSP	Video Format	Select a video format.
	Require Password	Turn Require Password on or off.
	Set RTSP Access Password	Set or change an RTSP access password.
	RTSP URL Address	Displays RTSP URL address.
RTMP	Server URL	Copy and paste your video platform's server URL and stream key.
	Stream Key	
	Start Using RTMP	Click Start to start streaming, Stop to stop streaming.

Network

PTZ Control

Setting

Video Format

Network

System

CAM520 Pro3

Hostname

CAM520 Pro3

Static IP

DHCP

If the DHCP mode can not get IP, it will change to static IP mode automatically.

IP Address

10.100.90.57

Gateway

10.100.90.254

NetMask


255.255.255.0

DNS

10.100.1.6

Item	Description
Hostname	Click the pencil icon to edit a hostname. Use upper and lowercase letters and numbers.
Static IP, DHCP	Set up static IP or DHCP. If Static IP is selected, enter your network settings to set up a static IP connection and click Confirm .

System

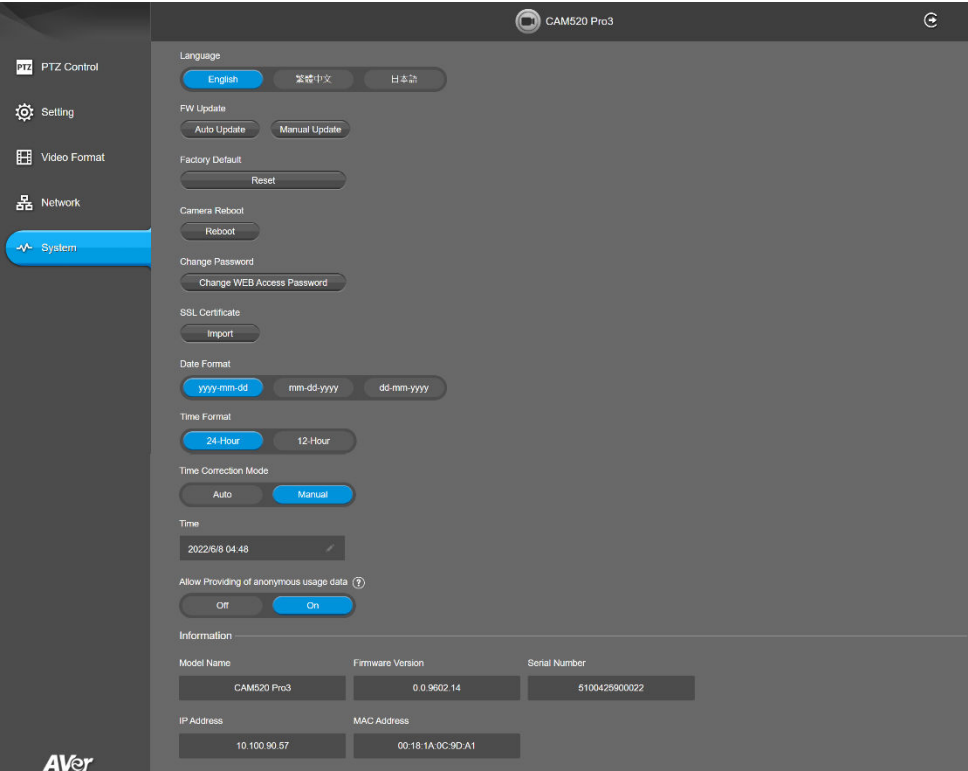


Item	Description
Language	Select a language for the web interface.
Firmware Update	<p>Update your camera's firmware.</p> <ul style="list-style-type: none">● Auto Update: Checks and updates online.● Manual Update: Update the firmware using a file offline. <p>Note: The camera will reboot and the connection will be lost. Please wait a few minutes and keep the power cable connected. Unplugging the cable during this process may damage the device.</p>
Factory Default	<p>Reset your camera to factory default settings. You can choose to keep the IP address by selecting the checkmark.</p> <ul style="list-style-type: none">● If you forgot your password, use PTZApp 2 to reset the web interface password to the default aver4321.
Camera Reboot	Reboot the camera.
Change Password	<p>Change the web interface password.</p> <ul style="list-style-type: none">● Use 6-10 characters, upper and lowercase letters, numbers and special characters (* ! % + = , - _ ^ / @ . ~).

	<ul style="list-style-type: none"> ● If you forgot your password, use PTZApp 2 to reset the web interface password to the default aver4321.
SSL Certificate	Upload an SSL certificate.
Date Format	Select a date format.
Time Format	Select a time format.
Time Correction Mode	<p>Select a time correction mode.</p> <ul style="list-style-type: none"> ● Auto: Enter your Network Time Protocol (NTP) server URL to synchronize the clock. The default NTP server is located in the US. ● Manual: Click the pencil icon to set up the clock.
Allow Providing of Anonymous Usage Data	Opt-in or opt-out of providing usage data.
Information	Displays your camera information such as IP address.


PTZApp 2

Install PTZApp 2

1. Download PTZApp 2 to your computer from the official website (<https://communication.aver.com/model/ptzapp2>) or AVer Download Center. (<https://www.aver.com/download-center>).
2. Double-click the downloaded .exe file.
3. Follow the instructions displayed on the setup wizard to install PTZApp 2.
4. You'll be prompted to install plug-ins for additional features.
Besides **Main App**, also select **Install to support IP virtual streaming...** on Windows or authorize with your username and password on Mac.



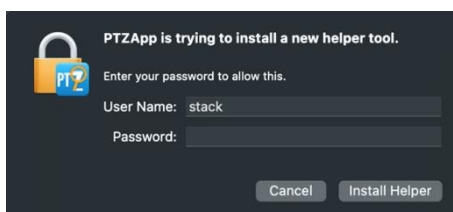



Windows



Mac

Open and Quit PTZApp 2


1. Double-click the PTZApp 2 icon  to open PTZApp 2 in your browser.
2. Connect your AVer camera to your computer with a USB cable. When PTZApp 2 detects a USB-connected camera, a camera card will appear under USB Devices.
3. Click **Setting** on your camera card for pan, tilt and zoom controls, presets, and advanced settings.
4. To quit PTZApp 2, click the **Show Hidden Icons** arrow on the taskbar, right-click the PTZApp 2 icon , and select **Quit**.
5. If you can't open PTZApp 2 after installation, click the **Show Hidden Icons** arrow on the taskbar, right-click the PTZApp 2 icon , and select **Restore**.



USB Devices

PTZApp 2 opens to USB Devices page. When a USB-connected camera is detected, a camera card will appear here.

Overview of the USB Devices page

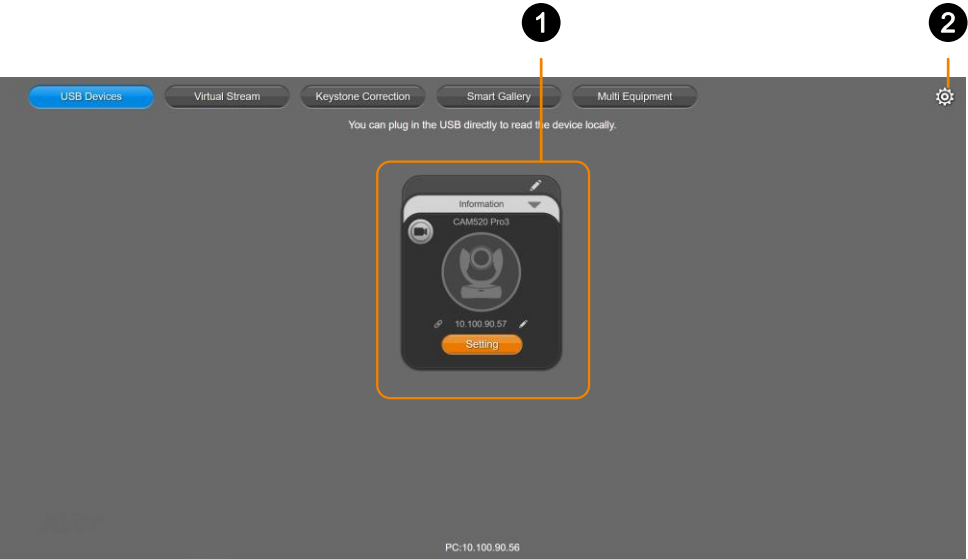


1. Camera Card

Represents a detected USB-connected AVer camera.

2. Settings

Item	Description
Language	Change the PTZApp 2 interface language to English, Chinese or Japanese.
Hotkey Control	Turn hotkey on or off.
PTZApp Update	View PTZApp 2 version or check for updates.
Usage Data	Opt-in or opt-out of providing anonymous usage data.
EZManager Pair	Pair with EZManager to manage all your USB-connected AVer cameras.

Overview of the Camera Card

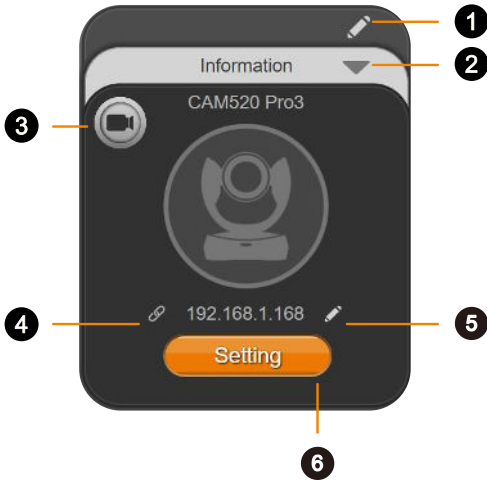

1. Name

Click the **pencil** icon  to name your camera.


2. Information

Click the **triangle** icon to view camera information such as firmware version. Click again to exit.


3. Live View

Click the **video recorder** icon to open a floating live view.

4. Web Interface

Click the **hyperlink** icon  to access your camera's web interface via IP connection on your browser.


5. Edit IP Address

Click the **pencil** icon to  switch between static IP and DHCP connection. The default static IP address is **192.168.1.168**.

6. Setting

Click the **Setting** button for pan-tilt-zoom controls, presets, and advanced settings.

Overview of the Floating Live View

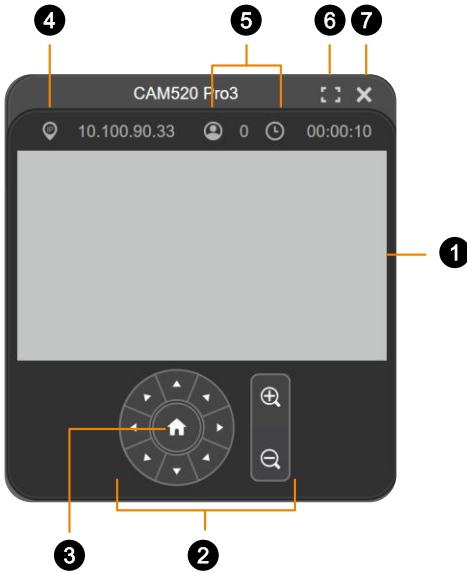

1. Live View

2. Directional Pad and Zoom

3. Pan-Tilt Reset



Reset the pan-tilt position to the center.

4. IP Address

5. Head Count and Video Transmission Duration

Click the **head count** icon to display head count and the duration of your video transmission. Click the icon again to hide the information.

6. Full Screen

Click the **full screen** icon  to expand the live view in full screen. Click the icon  or press **Esc** on your keyboard to exit full screen.


7. Close

Click the **X** icon to close the floating live view and stop transmitting video.

Virtual Stream

Virtual Stream allows you to send camera video over IP networks to video conferencing software such as Teams, Skype and Zoom.

- Video latency may vary depending on your CPU. We recommend Intel Core i5 or higher.
- Video Stream transmits video only.

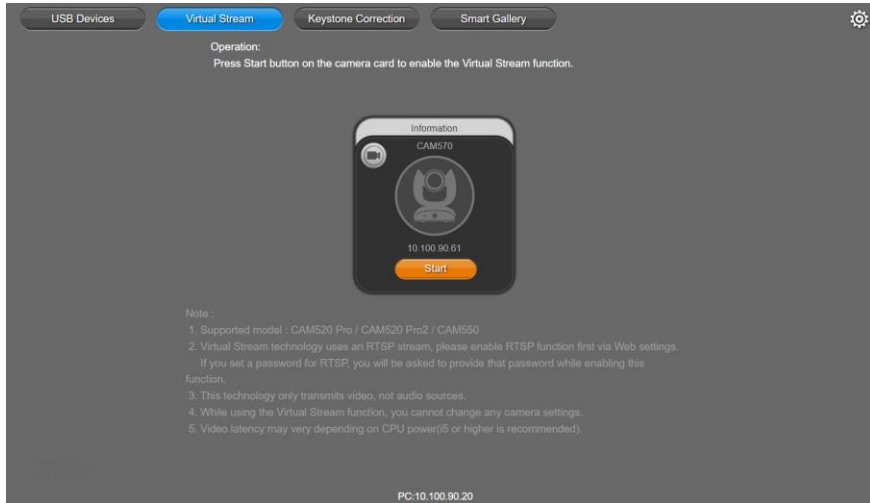

To start a virtual stream:

1. Make sure your camera and computer running the video conferencing software are connected to the same network.
2. Make sure you have enabled your camera's RTSP setting on its web interface.
3. Go to **Virtual Stream** > click **Start** on your camera card.
4. Enter the RTSP password when prompted, if any.
5. Open your video conferencing software. Choose **AVer USB VCam** as the video source, not your camera model name.
6. For pan, tilt and zoom controls, use a remote control or VISCA commands.

To stop a virtual stream:

Click **Stop** on your camera card.

EZLive

Please go to <http://www.aver.com/download-center> to download the AVer EZLive software. After downloading, double-click on the file and follow the on-screen instructions to complete the installation.

Use AVer EZLive

During a video call, EZLive can help user to do:

- (1) Camera ePTZ
- (2) Volume control for the speaker connected
- (3) Capture camera's still images
- (4) Record video
- (5) Live stream to Youtube, Livehouse.in, USTREAM...etc.
- (6) Camera Zoom in/out
- (7) Capture PC screen shot
- (8) Record PC screen video
- (9) Set up livestream
- (10) Open file management to retrieve photos and video files
- (11) Livestream setting
- (12) Drawing tool

