


Y

Yi8/Yi12 Manual 1.4 en

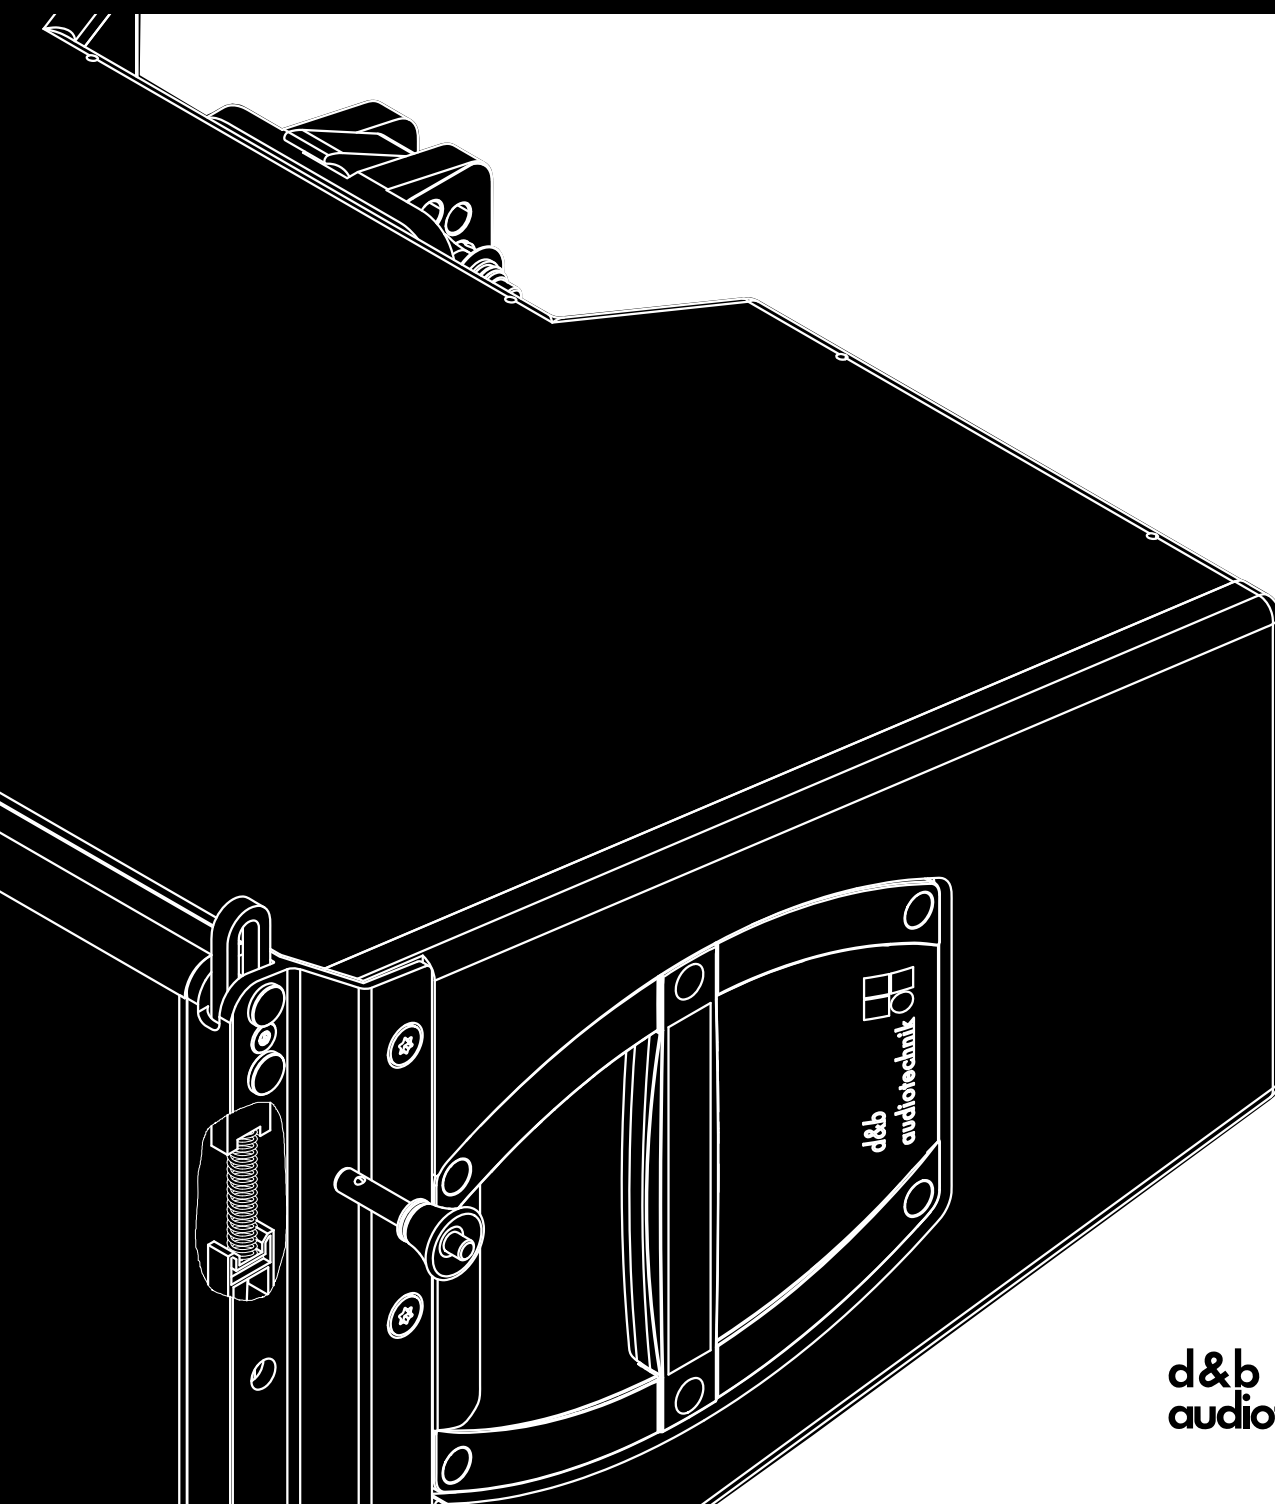

General information

Yi8/Yi12 Manual

Version: 1.4 en, 10/2022, D2713.EN .01

Copyright © 2022 by d&b audiotechnik GmbH & Co. KG; all rights reserved.

Keep this document with the product or in a safe place so that it is available for future reference.

We recommend you to regularly check the d&b website for the latest version of this document.

When reselling this product, hand over this document to the new owner.

If you supply d&b products, please draw the attention of your customers to this document. Enclose the relevant documents with the systems. If you require additional documents for this purpose, you can order them from d&b.

d&b audiotechnik GmbH & Co. KG
Eugen-Adolff-Str. 134, D-71522 Backnang, Germany
T +49-7191-9669-0, F +49-7191-95 00 00

1	Safety precautions.....	4
2	Yi8/Yi12 loudspeaker.....	5
2.1	Product description.....	5
2.2	Connections.....	5
2.3	Operation.....	8
2.3.1	Controller settings.....	8
2.4	Dispersion characteristics.....	9
2.5	Technical specifications.....	10
3	Manufacturer's declarations.....	11
3.1	Conformity of loudspeakers.....	11
3.2	EN54 Approval.....	11
3.3	WEEE Declaration (Disposal).....	11

Potential risk of personal injury


Never stand in the immediate vicinity of loudspeakers driven at a high level. Professional loudspeaker systems are capable of causing a sound pressure level detrimental to human health. Seemingly non-critical sound levels (from approx. 95 dB SPL) can cause hearing damage if people are exposed to it over a long period.

In order to prevent accidents when deploying loudspeakers on the ground or when flown, please take note of the following:

- When setting up the loudspeakers or loudspeaker stands, make sure they are standing on a firm surface. If you place several systems on top of one another, use straps to secure them against movement.
- Only use accessories which have been tested and approved by d&b for assembly and mobile deployment. Pay attention to the correct application and maximum load capacity of the accessories as detailed in our specific "Mounting instructions" or in our "Flying system and Rigging manuals".
- Ensure that all additional hardware, fixings and fasteners used for installation or mobile deployment are of an appropriate size and load safety factor. Pay attention to the manufacturers' instructions and to the relevant safety guidelines.
- Regularly check the loudspeaker housings and accessories for visible signs of wear and tear, and replace them when necessary.
- Regularly check all load bearing bolts in the mounting devices.

Potential risk of material damage

Loudspeakers produce a static magnetic field even if they are not connected or are not in use. Therefore make sure when erecting and transporting loudspeakers that they are nowhere near equipment and objects which may be impaired or damaged by an external magnetic field. Generally speaking, a distance of 0.5 m (1.5 ft) from magnetic data carriers (floppy disks, audio and video tapes, bank cards, etc.) is sufficient; a distance of more than 1 m (3 ft) may be necessary with computer and video monitors.

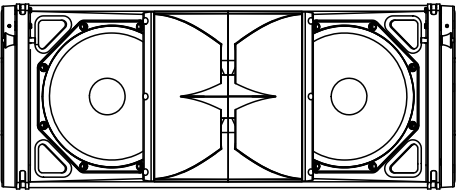

2.1 Product description

The Yi8 line array module is intended for small to medium sound reinforcement application. When the Y Flying frame is used, up to 24 cabinets can be flown in vertical columns producing a constant directivity dispersion pattern of 80° in the horizontal plane.

The Yi12 line array module is acoustically and mechanically compatible with the Yi8 providing a 120° horizontal dispersion.

The Yi8/Yi12 cabinets are passive 2-way designs, both housing 2 x 8" neodymium LF drivers, one 1.4" exit HF compression driver with a 3" diaphragm mounted to a dedicated wave shaping device and a passive crossover network.

The wave segments of each cabinet couple without gaps and sum up coherently. Splay angles between adjacent cabinets can be set in the range from 0° to 14° with a 1° resolution.

The two LF drivers are positioned in a dipolar arrangement providing an exceptional dispersion control even at lower frequencies with the nominal horizontal dispersion angle being maintained down to 500 Hz.

The frequency response extends from 54 Hz to above 19 kHz.

The cabinets are constructed from marine plywood and have an impact and weather protected PCP (Polyurea Cabinet Protection) finish. The fronts of the loudspeaker cabinets are protected by a rigid metal grill backed by an acoustically transparent foam.

Yi-Series rigging components and arrays


Yi-Series arrays may consist of a combination of Yi8 and Yi12 loudspeakers and/or Yi-SUB cardioid subwoofers.

Cabinets are mechanically connected using the rigging strands on both sides of the cabinet front and a central strand at the rear of the cabinet. All necessary rigging components are mounted to the cabinet and fold out or slide out when needed.

A detailed description of the Yi-Series rigging components is given in the Yi-Series Rigging manual which is provided with the corresponding Yi Mounting frame.

A detailed description of planning and designing Yi arrays is given in the technical information "TI 385 d&b Line array design, d&b ArrayCalc" which is also provided with the Y Flying frame.

The d&b ArrayCalc simulation software can be downloaded from the d&b website at www.dbaudio.com.

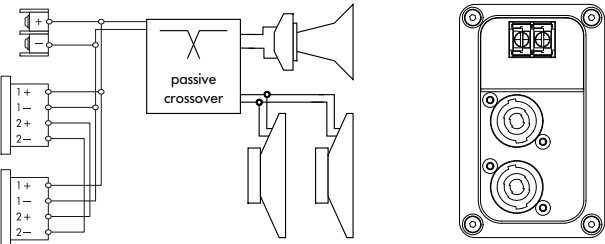


Connector wiring

2.2 Connections


The cabinets are fitted with a pair of NL4 M connectors and a two pole screw terminal block (ST). All four pins of both NL4 M connectors are wired in parallel. The cabinets use the pin assignments 1+/1-. Pins 2+/2- are designated to active subwoofers.

Pin equivalents of the applicable connector options are listed in the table below.


NL4 M	1+	1-	2+	2-
ST	+	-	n.a.	n.a.



Cover plate and rubber grommet




Step 1



Step 2

Installing the fixed cable connection

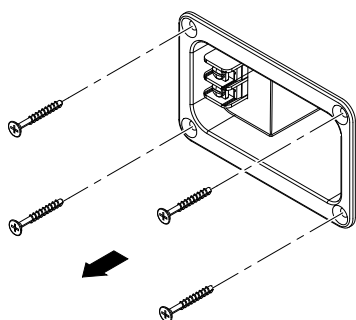

Step 3


Fixed cable connection

The Yi8 and Yi12 loudspeakers are each supplied with a cover plate [1] and a rubber grommet feed through [2]. For indoor operation, these items can be used to hide the connector panel, if required. For unprotected outdoor operation, the connector panel must be covered, i.e. both items must be used to achieve an IP degree of protection of IP34.


To install the fixed cable connection, proceed as follows:

Tools required: Philips screw driver (#PH2).


1. Remove the knockout opening in the cover plate [1] and attach the rubber grommet [2] correspondingly.
2. Insert the connection cable through the rubber grommet.
3. Undo the four screws of the connector panel.
4. Connect the cable wires to the screw terminal.
⇒ Observe the correct polarity!
5. Push the cover plate towards the connector panel until it fits into place.
6. Finally fix the cover plate together with the connector panel using all screws.

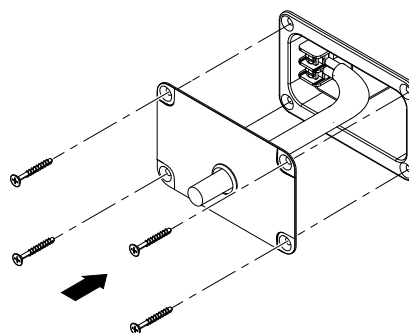

Step 4/5



Step 6



NL4 cable connection with cover plate [1]


NL4 connection with cover plate

The two NL4 connector sockets of the cabinet's connector panel are located in a recess to allow the use of the cover plate [1] together with NL4 cable connectors, as shown in the graphic opposite.

Note: Neutrik NL4FC type connectors must be used for this option.

The cover plate is equipped with two knockout openings to allow daisy chaining of the loudspeaker.

To use the NL4 connection, proceed in the same manner as described in the previous section .

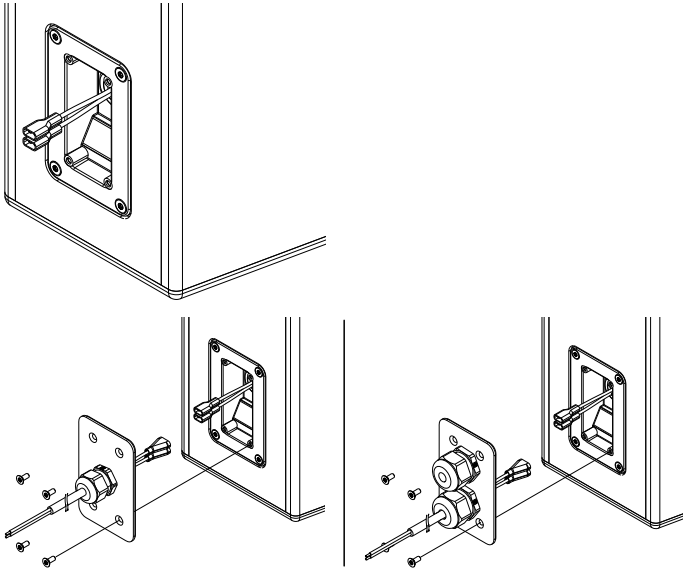

Faston type connector, male single PG (standard), dual PG (optional)

WR option (Weather Resistance)

NOTICE!

The WR option enables operation of loudspeakers in changing ambient conditions, however it is not intended to enable permanent, unprotected operation of loudspeakers outdoors.

- Provide an additional cover over the loudspeakers.
- Aim the cabinets either horizontally or with a downward tilt.

A number of d&b loudspeakers are available in special options suitable for different types of installed applications and environmental conditions. The following options are available for the Yi8/Yi12 loudspeaker:

- Weather resistant (WR): This option is suitable for outdoor use. The cabinets have an impact and weather protected black PCP (Polyurea Cabinet Protection) finish.
- Special version stadium (SVS): This option is suitable for outdoor use, especially in stadiums. The cabinets are mechanically supported by metal brackets which are specifically designed for the respective application.
- Sea water resistant (SWR): This option is suitable for outdoor use, especially in wet and acid or salty environments.

WR cabinets are equipped with a recessed connector panel including a Faston type connector (2 x 6.3 mm, female). A cover plate which accepts single or dual PG cable glands (Type PG13.5 for cable diameters from 6 - 12 mm) is enclosed, as shown in the graphic opposite.

To install the fixed connection cable, please proceed as follows:

Tools required: Screw driver (#T20).

Note: Observe the correct polarity of the cable
Brown (+) / Blue (–).

1. Insert the connection cable through the PG screwing and connect the male connector to the female connector.
2. Push the cover plate towards the connector panel until it fits into place.
3. Fix the cover plate to the connector panel using the four countersunk screws.

d&b LoadMatch

Starting with the D80 amplifier platform, the LoadMatch function enables the amplifier to electrically compensate for the properties of the loudspeaker cable used without the need for an additional sense wire. For applicable loudspeakers, LoadMatch is therefore independent of the connector type used.

2.3 Operation

NOTICE!

Only operate d&b loudspeakers with a correctly configured d&b amplifier, otherwise there is a risk of damaging the loudspeaker components.

Applicable d&b amplifiers:

40D | 30D | 10D.

Application	Setup	Cabinets per channel
Yi8	Y8 Arc/Y8 Line	2
Yi12	Y12 Arc/Y12 Line	2

The applicable d&b amplifiers provide two setups ("Arc" or "Line") for the Yi8 and Yi12 loudspeakers. These are available in Dual Channel or Mix TOP/SUB mode.

Line and Arc setups

The selection of Line or Arc depends on the curvature of the array. Both setups may be used within one array.

The Line setup is used for long throw array sections with three or more consecutive splay settings of 0°, 1° or 2°. Compared to the Arc setup, the mid/high range is reduced to compensate for the extended nearfield.

The Arc setup is intended for line array loudspeakers when used in curved array sections.

The transition from Line to Arc configuration within the array is made according to the splay progression but may allow for certain deviations due to the wiring of the cabinets in groups of up to two.

2.3.1 Controller settings

For acoustic adjustment the functions CUT, CPL and HFC can be selected.

CUT mode


Set to CUT, the low frequency level of the cabinets is reduced. The Yi8/Yi12 array is now configured for use with the d&b Yi-SUB or J-SUB subwoofers.

CPL function


The CPL (Coupling) function compensates for coupling effects between the cabinets of an array. CPL begins gradually around 2 kHz, with the maximum attenuation below 100 Hz. As coupling effects increase with the length of the line array, the CPL function can be set to dB attenuation values between 0 and -9. With higher attenuation values the corner frequency of the filter shifts towards lower values.

Positive CPL values create an adjustable low frequency boost (0 to +5 dB) and can be set when the system is used in full range mode without subwoofers.

Note: Make sure that all cabinets within the line array are operated with the same CPL setting.

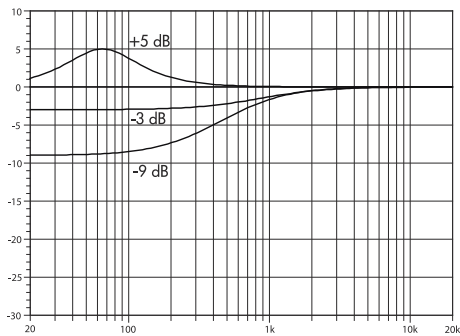

Frequency response correction of the CPL function

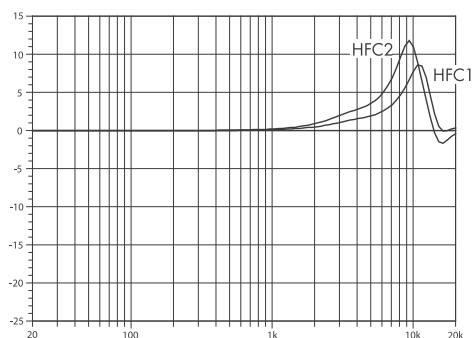

Frequency response correction of the HFC function

HFC function

Selecting the HFC (High Frequency Compensation) function compensates for the loss of high frequency energy due to air absorption when loudspeakers are used to cover far field listening positions.


The HFC function has two settings (HFC1 and HFC2) for different distances the cabinets need to cover. The settings should be used selectively; HFC1 for cabinets covering distances larger than 25 m (82 ft) and HFC2 for those covering distances larger than 50 m (164 ft).

The compensation is adjusted for a typical relative humidity of 40 %. With lower humidity the absorption by air increases therefore the distances where the respective HFC setting provides a correct equalization are shorter than indicated above.


Using the HFC function provides the correct sound balance between close and remote audience areas, whilst all amplifiers driving the array can be fed with the same signal.

2.4 Dispersion characteristics


The graphs below show the horizontal dispersion angle over frequency plotted using lines of equal sound pressure (isobars) at -6 dB and -12 dB. The nominal dispersion is maintained above 600 Hz, while a useful horizontal dispersion control is achieved down to 500 Hz.

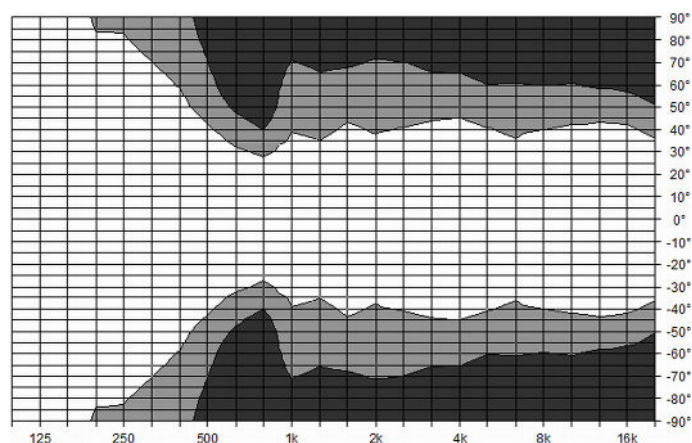


Isobar diagram Yi8 horizontal

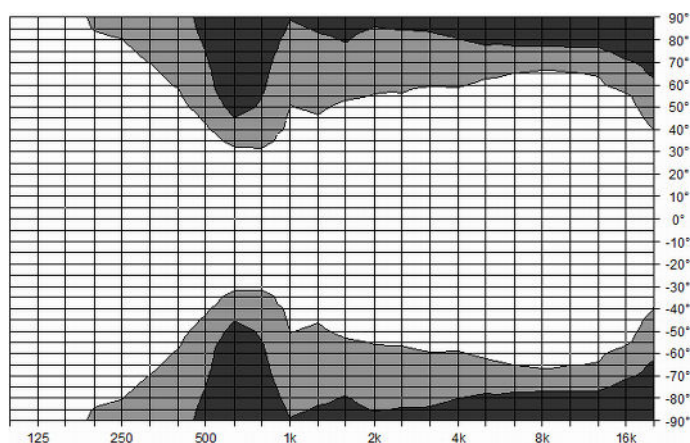



Isobar diagram Yi12 horizontal

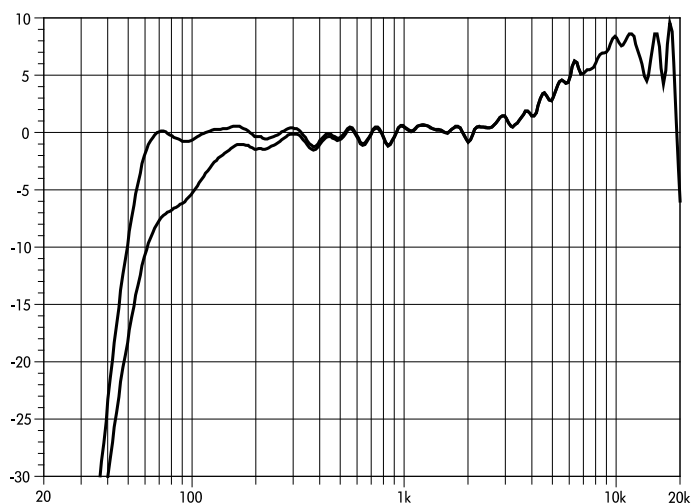

Yi8 frequency response, standard and CUT modes

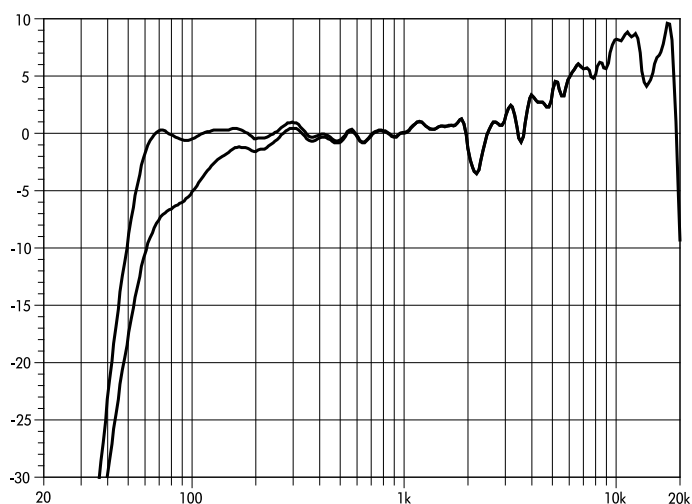

Yi12 frequency response, standard and CUT modes

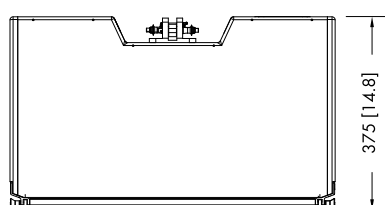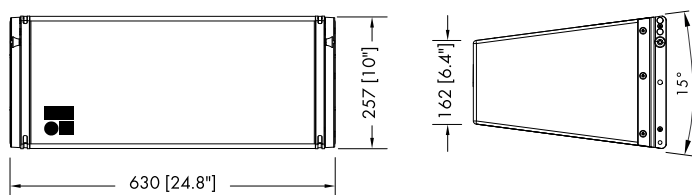

Yi8/Yi12 cabinet dimensions in mm [inch]


2.5 Technical specifications

System data

Frequency response (-5 dB standard)	54 Hz - 19 kHz
Frequency response (-5 dB CUT mode)	100 Hz - 19 kHz
Max. sound pressure (1 m, free field)	
with 10D	134 dB
with 30D	137 dB
with 40D	139 dB
	(SPLmax peak, pink noise test signal with crest factor of 4)

Loudspeaker data

Nominal impedance	8 ohms
Power handling capacity (RMS/peak 10 ms)	400/1600 W
Nominal dispersion angle (horizontal) Yi8	80°
Nominal dispersion angle (horizontal) Yi12	120°
Splay angle setting	0° ... 14°
	1° increment
Components	2 x 8" driver
	1 x 1.4" exit compression driver
	Passive crossover network
Connections	2 x NL4 M
	1 x screw terminal (ST - up to 4 mm ² /AWG 11)
	WR option: Faston type connector (2 x 6.3 mm), female
Pin assignment	NL4 M: 1+/1-
	WR option: Brown: (+) / Blue: (-)
Weight	20 kg (44 lb)





3.1 Conformity of loudspeakers

This declaration applies to:

d&b Z0717 Yi8 loudspeaker

d&b Z0718 Yi12 loudspeaker

by d&b audiotechnik GmbH & Co. KG.

All product variants are included, provided they correspond to the original technical version and have not been subject to any later design or electromechanical modifications.

We herewith declare that said products are in conformity with the provisions of the respective directives including all applicable amendments.

Detailed and applicable declarations are available on request and can be ordered from d&b or downloaded from the d&b website at www.dbaudio.com.

3.2 EN54 Approval

Product identification codes

Z0717.541 Yi8 loudspeaker EN54-WR
Z0717.542 Yi8 loudspeaker EN54-SWR
Z0717.543 Yi8 loudspeaker EN54-SVS

Z0718.541 Yi12 loudspeaker EN54-WR
Z0718.542 Yi12 loudspeaker EN54-SWR
Z0718.543 Yi12 loudspeaker EN54-SVS

Certified according to:

EN54-24: 2008
ISO 7240-24: 2016

Certified by:

Kiwa Nederland B.V.

Wilmersdorf 50
Postbus 137

7327 AC Apeldoorn NL



3.3 WEEE Declaration (Disposal)

Electrical and electronic equipment must be disposed of separately from normal waste at the end of its operational lifetime.

Please dispose of this product according to the respective national regulations or contractual agreements. If there are any further questions concerning the disposal of this product, please contact d&b audiotechnik.

WEEE-Reg.-Nr. DE: 13421928

