

MICROPHONES

TS-903 TS-904

Thank you for purchasing TOA's Microphone.


Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION

The TS-903 and TS-904 Microphones are designed for exclusive use with the Chairman units (TS-811, TS-911, TS-821, and TS-921) and the Delegate units (TS-812, TS-912, TS-822 and TS-922) of the TOA Infrared Conference Systems.

The TS-903 is of standard type, and the TS-904 is of long type.

2. INSTALLATION

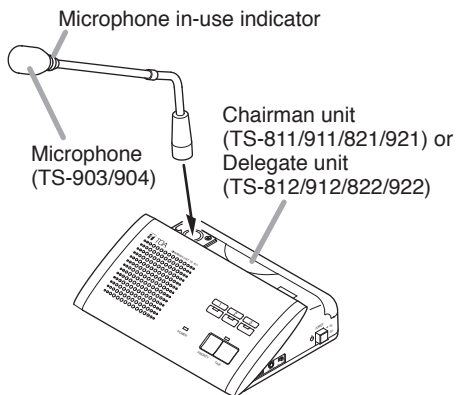

3. SPECIFICATIONS

| Model No. | TS-903 | TS-904 |
|--------------------------|--|-----------------|
| Type | Electret condenser microphone | |
| Directivity | Unidirectional | |
| Rated Impedance | 1.8 k Ω | |
| Rated Sensitivity | -37 dB (1 kHz, 0 dB = 1 V/Pa) | |
| LED Indicator | Speech indicator (ring type) | |
| Frequency Response | 100 Hz to 13 kHz | |
| Output Connector | Equivalent to XLR-4-12C | |
| Operating Temperature | 0 to 40 °C (32 to 104 °F) | |
| Operating Humidity | 90%RH or less (no condensation) | |
| Finish | Gooseneck: Stainless steel, black Other: ABS resin, black | |
| Length | 368 mm (14.49") | 518 mm (20.39") |
| Weight | 90 g (0.21 lb) | 105 g (0.23 lb) |
| Applicable Unit (Option) | Chairman unit: TS-811, TS-911, TS-821, TS-921 Delegate unit: TS-812, TS-912, TS-822, TS-922 | |

Note: The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe

Manufacturer:
TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo,
Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg,
Germany

