





ATUC-M58H

Specifications

Dimensions

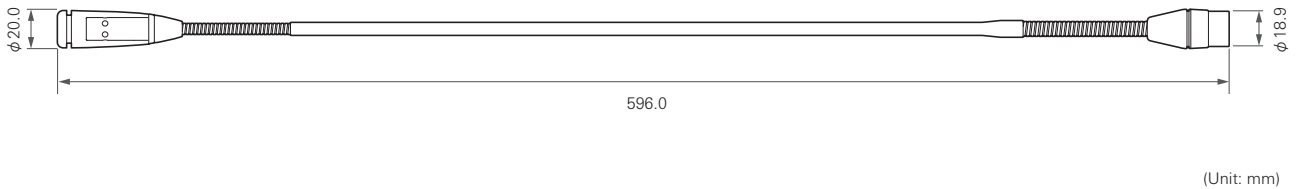


Polar pattern



LEGEND

1 kHz	—	SCALE IS 5 DECIBELS PER DIVISION
-------	---	----------------------------------


Frequency response

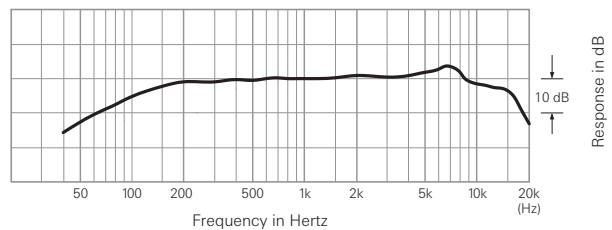

LEGEND

—	0°, 50 cm
---	-----------

Connection procedure



Specifications

Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Hypercardioid
Frequency response	100-15,000 Hz
Open circuit sensitivity	-40 dB (10.0 mV), (0 dB = 1 V/Pa, 1 kHz)
Impedance	250 ohms
Maximum input sound level	134 dB SPL (1 kHz at 1% THD)
Signal-to-noise ratio	64 dB (1 kHz at 1 Pa, A-weighted)
Phantom power requirements	24-52 V DC, 7.7 mA
Weight	92 g (3.2 oz)
Dimensions	Diameter: 20 mm (0.79"), Height: 596.0 mm (23")
Output connector	Integral 3-pin XLRM type
Accessories	Windscreen AT8166

• 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

For product improvement, the product is subject to modification without notice.