

## Blackmagic Micro Studio Camera 4K G2



Blackmagic Micro Studio Camera 4K G2 is an amazing, broadcast quality live production camera in a tiny body. The Four Thirds sensor has 13 stops of dynamic range, incredible low light performance and produces stunning Ultra HD images in all lighting conditions. 12G-SDI Micro BNC connectors support 10-bit uncompressed video up to 2160p60 and 2 channel audio on the output. The input supports tally, camera control, control of the built-in color corrector plus lens control, from an ATEM switcher. Or when using an ATEM Mini switcher, the HDMI connector will output 1080 and support all control features. Plus it's even a Hollywood quality cinema camera because it can record Blackmagic RAW to external USB-C drives. With multiple mounting points, place Blackmagic Micro Studio Camera 4K G2 where no other camera will go!

**\$995**

### Camera Features

**Effective Sensor Size**

17.78mm x 10mm (Four Thirds)

**Lens Mount**

Active MFT Mount.

**Lens Control**

Iris, focus, zoom on supported lenses.

**Dynamic Range**

13 Stops.

**Dual Native ISO**

0dB and 18dB gain.

**Sensitivity at 0dB Gain**

f11 with 2160p59.94.

f12 with 2160p50.

at 2,000 lux with 89.9% reflectance.

**Signal to Noise Ratio**

63dB for 2160p.

**Shooting Resolutions**

3840 x 2160 (Ultra HD) up to 60 fps.

**Frame Rates**

23.98, 24, 25, 29.97, 30, 50, 59.94 and 60 frames per second.

Off-speed frame rates up to 60 fps in Ultra HD.

**Focus**

Auto focus available using compatible lenses.

**Mounting Options**

1 x 1/4 inch (top),

3 x 1/4 inch (bottom).

### Connections

**SDI Video Inputs**

1

**SDI Rates**

3G, 6G, 12G.

**HDMI Video Outputs**

1 x HDMI Type A output.

HDMI output is always HD, up to 1080p60.

**SDI Video Outputs**

1

**HDMI 2.0 Video Outputs**

1

---

**Analog Audio Input**

1 x 3.5mm Stereo Input. Can also be used for Timecode input.

**Reference Inputs**

Program SDI Input on camera or on Blackmagic Studio Converter.

**SDI Audio Output**

2 channels of program audio embedded in 3G/6G/12G-SDI.

**HDMI Audio Outputs**


2 channels 48 kHz and 24-bit.

**Remote Control**

Remote camera control over SDI, HDMI or USB Ethernet with suitable adapter.

**Computer Interface**

1 x USB Type-C 3.1 Gen 1 (up to 5Gb/s) expansion ports for external recording and focus / zoom demand connection. Software updates using USB-C Port.

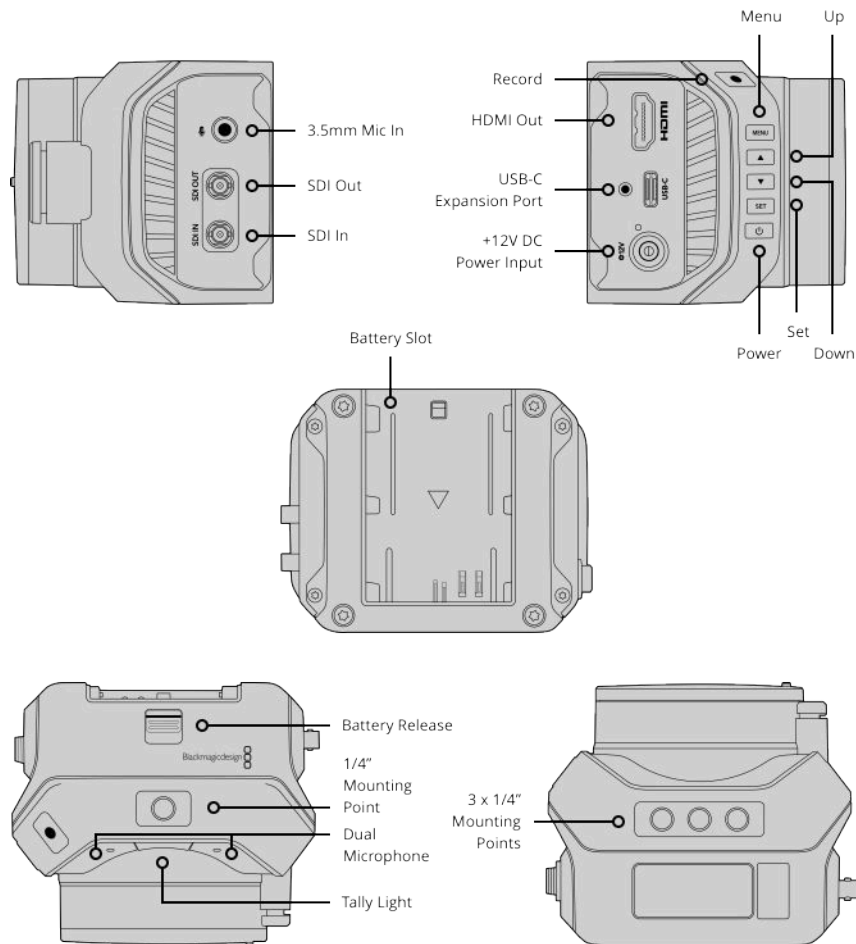

---

**Audio****Microphone**

Integrated stereo microphone.

**Built in Speaker**

None

---

**Standards****SD Video Standards**

None

---

**HD Video Standards**

1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080i50, 1080i59.94, 1080i60

**Ultra HD Video Standards**

2160p23.98, 2160p24, 2160p25,  
2160p29.97, 2160p30, 2160p50,  
2160p59.94, 2160p60

**SDI Compliance**

SMPTE 292M, SMPTE 424M,  
SMPTE 425M level A and B,  
SMPTE 2081-1, SMPTE 2081-10,  
SMPTE 2082-1 and SMPTE 2082-10.

**SDI Audio Sampling**

Television standard sample rate of 48  
kHz and 24-bit.

---

## Media

**Media**

1 x USB-C 3.1 Gen 1 expansion ports  
for external media for recording  
Blackmagic RAW.

**Media Format**

Can format media to ExFAT  
(Windows/Mac) or HFS+ (Mac) file  
systems.

---

## Supported Codecs

**Codecs**

Blackmagic RAW Constant Bitrate 3:1,  
Blackmagic RAW Constant Bitrate 5:1,  
Blackmagic RAW Constant Bitrate 8:1,  
Blackmagic RAW Constant Bitrate  
12:1,  
Blackmagic RAW Constant Quality Q0,  
Blackmagic RAW Constant Quality Q1,  
Blackmagic RAW Constant Quality Q3,  
Blackmagic RAW Constant Quality Q5

---

## Storage Features

**Storage Type**

1 x USB-C 3.1 Gen 1 expansion ports for external media.

**Recording Formats**

Blackmagic RAW 3:1, 5:1, 8:1, 12:1, Q0, Q1, Q3 and Q5 in Ultra HD 3840 x 2160 at the selected frame rate.

**Storage Rates**

Storage rates based on 30 frames per second.

---

3840 x 2160 (Ultra HD)

Blackmagic RAW 3:1 - 127 MB/s

Blackmagic RAW 5:1 - 77 MB/s

Blackmagic RAW 8:1 - 48 MB/s

Blackmagic RAW 12:1 - 32 MB/s

Blackmagic RAW Q0 - 96 to 190 MB/s

Blackmagic RAW Q1 - 64 to 153 MB/s

Blackmagic RAW Q3 - 43 to 109 MB/s

Blackmagic RAW Q5 - 26 to 64 MB/s

Constant Quality storage rates quoted are indicative only.

Actual storage rates are entirely dependent on image subject matter.

---

## Control

### Control

5 control buttons including Set, Up, Down, Menu, and Power.

### External Control

Blackmagic Zoom Demand and Blackmagic Focus Demand for controlling your camera and lens from tripod handles.

Blackmagic Control Protocol over SDI and HDMI for external control when used with a compatible ATEM switcher with ATEM Software Control or ATEM Camera Control Panel. Includes control of some camera settings, focus, iris and zoom with compatible lenses, color corrector, tally and record start and stop to external media via USB expansion port.

Camera Control REST API over USB Ethernet for external control via HTTP when used with REST client applications such as Postman.

---

## Network Management

### NTP

Network time protocol support allows you to sync the time on your camera, whenever connected to a network with any NTP server of your choice.

### Web Media Manager

Using a browser connected over Ethernet, web media manager allows you to access, browse, download and delete files from any drive connected to the camera.

### FTP

Download files from any drive attached to your camera using FTP.

### SMB

File sharing using SMB.

---

## Color Corrector

DaVinci YRGB

---

## Tally

### Live Tally Indicator

1 x front facing for talent.

---

---

## Software

### Software Included

Blackmagic Camera Setup for Mac and Windows.

---

## Operating Systems



Mac 12.0 Monterey,  
Mac 13.0 Ventura or later.



Windows 10, 64-bit.  
Windows 11, 64-bit.

---

## Power Requirements

### Power Supply

1 x External 12V DC 36W power supply.

### Power Inputs

1 x 12V DC locking 5.5 mm barrel connector.

### Power Usage

18 - 25 W.

---

## Optional Accessories

Blackmagic Focus Demand  
Blackmagic Zoom Demand  
ATEM Mini switchers  
ATEM SDI switchers  
ATEM Television Studio switchers  
ATEM Constellation switchers  
Blackmagic Video Assist  
LP-E6 Battery  
Micro BNC Cables

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

Blackmagic Micro Studio Camera 4K G2

Turret dust cap

External 12V DC power supply with locking connector and international socket adapters for most countries.

Welcome wallet with QR code for software download

---

## Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller