

K2

Limited Edition Dual 1" Condenser Studio Valve Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664


Features

- Large capsule with gold sputtered diaphragm and internal shock mounting
- Wide dynamic range and Ultra low noise
- Class 'A' valve circuitry
- Hand-selected and graded 6922 twin-triode valve
- High strength welded and heat-treated steel mesh head
- Durable satin nickel finish
- Continuously variable polar patterns. From omni, through cardioid to figure 8, controlled at the power supply.
- Designed and manufactured in Australia
- Full 10 year warranty
- Dedicated Power Supply




Specifications

Acoustic Principle	Pressure, Pressure gradient
Directional Pattern	Switchable Omnidirectional / Cardioid / Figure-8 in nine steps
Frequency Range	20 Hz-20 kHz
Sensitivity	-37dB re 1V/Pa (14mV @ 94dB SPL) +/-2dB
Output Impedance	200Ω
Dimensions	Length - 201mm (7.9133") Diameter - 65mm (2.5590")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	6.82kg
Net Weight	1440g

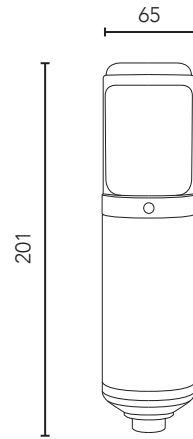


Polar Pattern

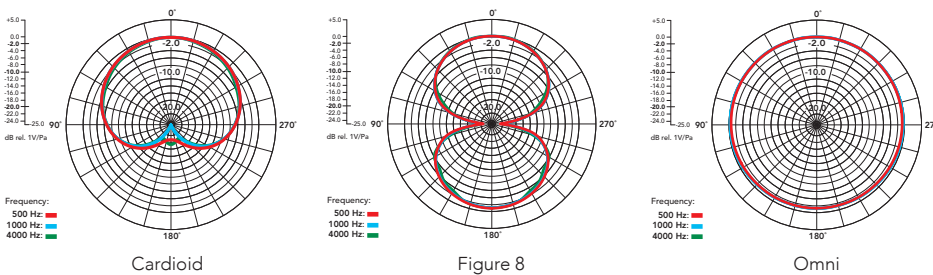

Accessories

- SM2 shock mount
- RC2 case
- Transformer & high quality XLR lead

Frequency Response

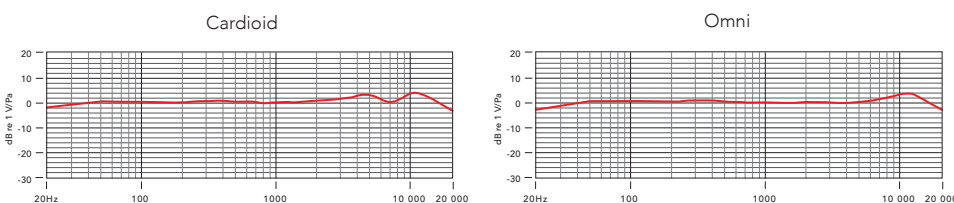

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES