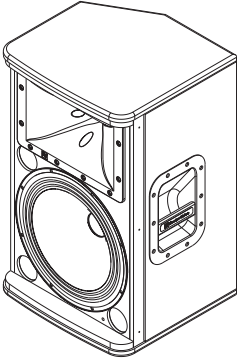
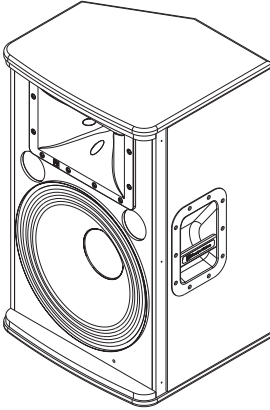
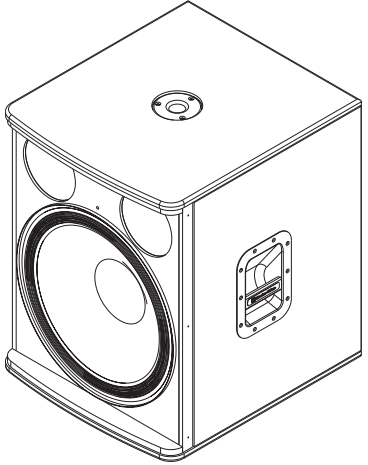


# Specifications

| Model<br>(Part Number)           | <b>ELX112P</b><br>(120V - F01U170820)<br>(230V - F01U170817)                                                                    | <b>ELX115P</b><br>(120V - F01U170821)<br>(230V - F01U170818)                       | <b>ELX118P</b><br>(120V - F01U170822)<br>(230V - F01U170819)                        |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                  |                                                |  |  |
| Freq. Response (-3 dB):          | 60 Hz - 18 kHz <sup>1</sup>                                                                                                     | 56 Hz - 18 kHz <sup>1</sup>                                                        | 42 Hz - 100 Hz <sup>2</sup>                                                         |
| Freq. Range (-10 dB):            | 50 Hz - 20 kHz <sup>1</sup>                                                                                                     | 44 Hz - 20 kHz <sup>1</sup>                                                        | 32 Hz - 130 Hz <sup>2</sup>                                                         |
| Max. Measured SPL <sup>3</sup> : | 132 dB                                                                                                                          | 134 dB                                                                             | 134 dB                                                                              |
| Coverage (Horiz. x Vert.):       | 90° x 50°                                                                                                                       |                                                                                    | Omnidirectional                                                                     |
| Power Rating:                    | 1000W                                                                                                                           |                                                                                    | 700W                                                                                |
| LF Transducer:                   | (1) EVS-12K, 305mm (12") Woofer                                                                                                 | (1) EVS-15K, 381mm (15") Woofer                                                    | (1) EVS-18K, 457mm (18") Woofer                                                     |
| HF Transducer:                   | DH-1K, 39mm (1.5") Titanium Diaphragm Compression Driver                                                                        |                                                                                    | N/A                                                                                 |
| Crossover Frequency:             | 1.7 kHz                                                                                                                         |                                                                                    | 100 Hz                                                                              |
| Connectors:                      | (2) XLR/TRS Combo Jacks, (1) Stereo RCA,<br>(1) XLR Link Output                                                                 |                                                                                    | (1) XLR/TRS Combo Jack,<br>(1) XLR Link Output                                      |
| Enclosure Material:              | 9-ply, 15mm Plywood, Internally Braced, with Textured Paint                                                                     |                                                                                    |                                                                                     |
| Grille:                          | 18GA Steel with Black Powdercoat                                                                                                |                                                                                    |                                                                                     |
| Dimensions (H x W x D):          | 607mm x 362mm x 340mm<br>(23.89" x 14.25" x 13.41")                                                                             | 708mm x 432mm x 382mm<br>(27.89" x 17.02" x 15.05")                                | 661mm x 507mm x 574mm<br>(26.02" x 19.98" x 22.60")                                 |
| Net Weight:                      | 16.8 kg (36.9 lbs)                                                                                                              | 22.5 kg (49.5 lbs)                                                                 | 31.3 kg (68.9 lbs)                                                                  |
| Shipping Weight:                 | 20.7 kg (45.5 lbs)                                                                                                              | 27.2 kg (59.8 lbs)                                                                 | 38.0 kg (83.6 lbs)                                                                  |
| Accessories:                     | TSS-1, Aluminum Tripod Stand<br>TSP-1, Tripod Kit, Includes (2) Tripod Stands and Carrying Case<br>ASP-1, Steel Subwoofer Stand |                                                                                    | ASP-1, Steel Subwoofer Stand                                                        |

<sup>1</sup> Full Space Measurement, EQ (—) Mode, Full-Range Mode.

<sup>2</sup> Half Space Measurement, EQ (—) Mode

<sup>3</sup> Max SPL is measured at 1m using broadband pink noise at maximum amplifier output.