

SOUNDVISION™



ACS-1500 MK II Series

ACTIVE COLUMN SPEAKER SYSTEM





ACS-1500 MK II SERIES

ACS-1500S-MK II SUBWOOFER
ACS-1500C-MK II COLUMN SPEAKER

Professional Active Column Speaker System which can cover the usage area from small to large Designed for hi-end professional sound performance especially for frequency response up to $40\text{Hz} \sim 18\text{KHz} \pm 3\text{dB}$, Power maximum 1800 Watts Amplifier Class D with DSP processor 5 Preset for optimum performance. And can stream wireless music via TWS Bluetooth

MEDIA PLAYER

WIRELESS STEREO AUDIO STREAMING BLUETOOTH.

REAR PANEL

Audio Streaming Wireless
TWS Bluetooth Version **5.0**




Support streaming via [phone / tablet](#)



TrueWireless™ stereo

Bluetooth connection mode, press PAIR button to interrupt the current Bluetooth connection and you can connect to other Bluetooth devices.

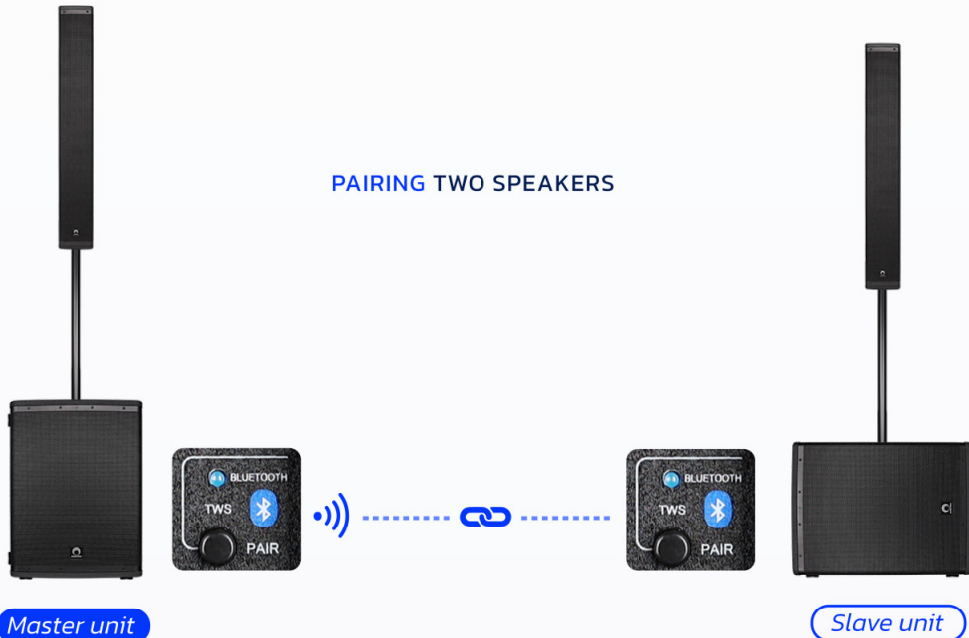

RS485 (RJ45) OUT.

Network data Used to connect multiple devices simultaneously

LINK OUT

Use XLR connector

RS485 (RJ45) IN

Use network data lines to connect



TWS Bluetooth 5.0
Audio Streaming Wireless

DSP presets

- DEFAULT
- MUSIC
- DANCE
- SPEECH
- USER

Multi-function audio signal input.

Used XLR or 1/4" connect mixer and other audio signal sources.



DISPERSION ANGLE



Horizontal 80 Degree x Vertical 20 Degree

Vertical Alignment column

vertical directivity is around 20°

Horizontal Alignment column

horizontal directivity is around 80°

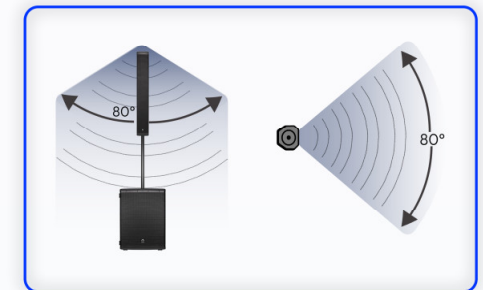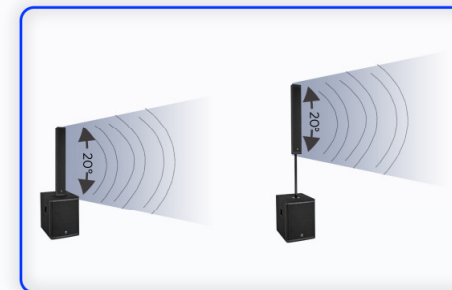

You'll get the best sound and coverage when all connected components project at the same angle.

ACS-1500 MK II

PROFESSIONAL ACTIVE COLUMN SPEAKER SYSTEM

STACK IDEAL FOR APPLICATION

This series includes

ACS-1500S-MK II
ACS-1500C-MK II

Subwoofer
Column speaker

- Two speaker extension poles of different lengths



73cm Pole

- The rigging lock between the speakers prevents moving



Rigging for column



Rigging for subwoofer




PRODUCT INSTALLATION

LOW Ceiling space



HIGH Ceiling space

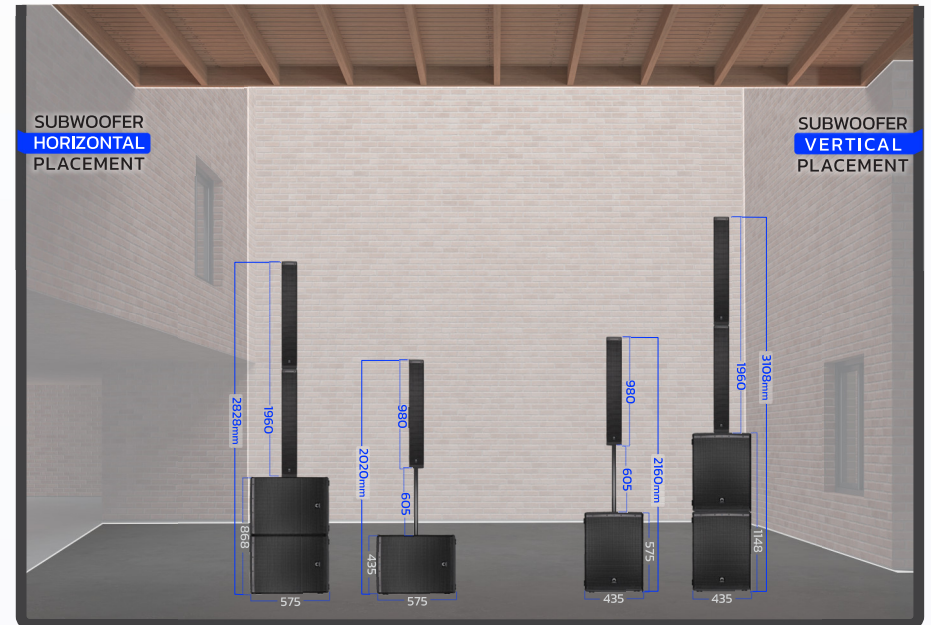

ACS-1500 MK II

PROFESSIONAL ACTIVE COLUMN SPEAKER SYSTEM

SUPPORT IDEAL ...

lifesound concert, event, shopping mall, meeting room- training, fitness, restaurant, hotel banquet room.



SPECIFICATIONS



Model	ACS-1500S-MK II (subwoofer)	ACS-1500C-MK II (column)
Transducer	Subwoofer Components : 15", 3" voice coil	Satellite Components : 4" x 8 Full Range Speaker
Frequency Response	40Hz ~ 180Hz ±3dB	180Hz ~ 18kHz ±3dB
Rated Power	600W / 1200W (MAX)	300W / 600W (MAX)
Amplifier	Class D	
Sensitivity	95dB 1m/1W	96dB 1m/1W
Maximum SPL	125dB/134dB (PEAK)	125dB/134dB (PEAK)
Nominal Impedance	4 Ω	4 Ω
Built-in DSP Processor	5 Mode Presets (DEFAULT, MUSIC, DANCE, SPEECH, USER)	
Media player	TWS Bluetooth 5.0 (True Wireless Stereo)	
Dispersion Angle (H x V)		80° x 20°
Connection		
Line Input	1 x Combo XLR or 1/4" Jack (female)	
Line Output	1 x XLR (male)	
Net Port	2 x RS485 (RJ45)	
Speaker Port	1 x Speakon (out)	1 x Speakon (in)
General		
Operating voltage	AC 220 ~ 240V, 50/60Hz	
Dimensions (H x W x D)	570 x 430 x 520mm	980 x 135 x 135mm
Net Weight	27 Kgs.	11 Kgs.

SOUNDVISION™



SOUND VISION CO., LTD.

9 Chaiyaphruek Rd., Taling Chan, Taling Chan, Bangkok 10170 Thailand
Support : 02-433-9988 Email : info@soundvision.co.th
Line-at : @soundvision www.soundvisionpro.com

