

T Series

2/4-Channel High-Performance Amplifier Platform with DSP and Dante™



- ☒ TOURING
- ☐ INSTALLATION



ArmoníaPlus
System Manager

The T Series is a flexible and cost effective amplifier platform loudspeaker processor. The range consists of 2 and 4 channel models supporting channel powers from 750 W to 4000 W.

All models deliver high peak voltage allowing high SPL with single 8/16 ohm cabinets. The high voltage is also good for sharing power between the channels for applications such as bi-amped loudspeakers or subwoofers with passive tops.

The T Series offers input via Dante, AES3, and analog. The Dante™ and AES3 solutions are optimized for daisy-chained distribution of 2-channel audio, enabling routing to many amplifiers without the need for external switches, repeaters, or splitters.

This helps in simplifying the process of setting up a typical networked system.

The loudspeaker processing features set a new benchmark for cost-effective amplification for small and medium sized systems and stage monitoring applications.

The T Series can be controlled and configured in various ways:

- through ArmoníaPlus, where it can be in mixed groups with advanced EQ together with other Powersoft products

- from the front panel display for things like preset recall (also per output), gain, delay, mute. This makes it the perfect match for powering the smaller solutions that are offered by rental companies. The display also shows the available

headroom, along side with other status monitoring

- with the dedicated webapp, that runs on any device with a browser (e.g. a tablet) and access the amplifier via an external WiFi access point to control all parameters.


- ▶ Renowned sound clarity
- ▶ Group controllable advanced EQ with raised cosine filters
- ▶ Large preset library
- ▶ Preset compatibility with X Series
- ▶ Long FIR filters (42.6 ms)




T Series

2/4-Channel High-Performance Amplifier Platform with DSP and Dante™

2 Channel - T302, T602, T902

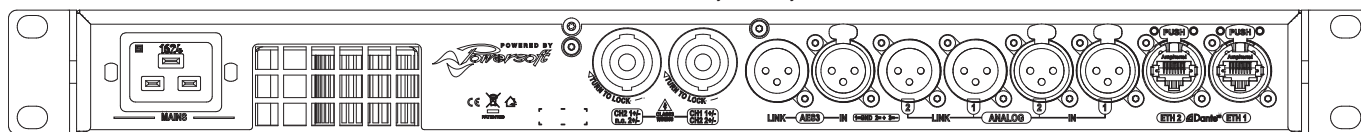

4 Channel - T304, T604, T904

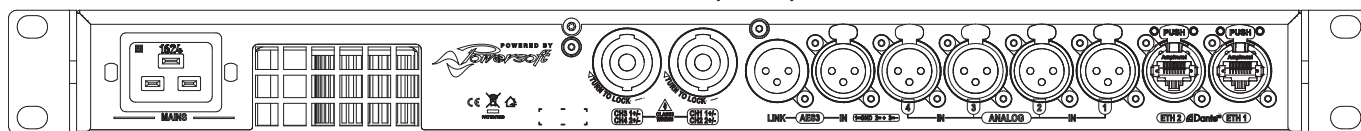

Specifications

Channel Handling								
		T302 - T602 - T902			T304 - T604 - T904			
Number of output channels		2 (2 Speakon NL4)			4 (2 Speakon NL4)			
		(bridgeable per channel pair)						
Number of input channels								
Analog		2 XLR (female) 2 XLR LINK (male)			4 XLR (female)			
Digital		AES3 - 1 XLR (female) LINK - 1 XLR (male)						
Audio								
	Gain	T302	T602	T902	T304	T604	T904	
Input sensitivity @ 8 Ω	32 dB	2.57	2.57	3.10	2.57	2.57	3.10	Vrms
S/N (20 Hz - 20 kHz @ 8 Ω, Typ.)		110	110	108	110	110	108	dB(A)
Max input level		24 dBu						
Frequency Response		20 Hz - 20 kHz +/-0.5 dB						
Crosstalk (1 kHz)		<-70 dB						
Input impedance		20kΩ Balanced						
CMRR		>65 dB						
THD+N (from 0.1 W to Half Power)		< 0.1% (typical < 0.05%)						
SMPTE IMD (from 0.1 W to Half Power)		< 0.1% (typical < 0.05%)						
Output impedance at 100 Hz		26 mΩ						
DSP								
AD converters		24 Bit Tandem™ @ 48 kHz 125 dB-A Dynamic Range - 0.005 % THD+N						
DA converters		24 Bit Tandem™ @ 48 kHz 117 dB-A Dynamic Range - 0.003 % THD+N						
Sample rate converter		24 Bit @ 96 kHz 140 dB Dynamic Range - 0.0001 % THD+N						
Internal precision		32 bit floating point						
Latency		2.5 ms fixed latency architecture						
Memory/Presets		256 MB (RAM) plus 512 MB flash for presets						
Delay		2 s (input) + 100 ms (output) for time alignment						
Equalizer		Raised-cosine, custom FIR, parametric IIR: peaking, hi/lo-shelving, all-pass, band-pass, band-stop, hi/lo-pass						
Crossover		linear phase (FIR), Butterworth, Linkwitz-Riley, Bessel: 6 dB/oct to 48 dB/oct (IIR)						
Limiters		TruePower™, RMS voltage, RMS current, Peak limiter						
Damping control		Active DampingControl™ and LiveImpedance™ measurement						
Display Panel								
Display		1.8" Colour TFT, 160x128 pixels, 600 nits						
Control		8 pushbuttons with RGB backlight						
Extra		USB port for external memory						

Data subject to change without notice.

	Output Stage	T302	T602	T902	T304	T604	T904
Maximum output power	per channel @ 8 Ω (symmetrical)*	1200 W	1300 W	1800 W	750 W	1250 W	1600 W
	per channel @ 4 Ω (symmetrical)*	1500 W	2500 W	3200 W	750 W	1500 W	2000 W
	per channel @ 2 Ω (symmetrical)*	1500 W	3000 W	4000 W	750 W	1500 W	1800 W
	per channel @ 8 Ω (asymmetrical)**	1300 W	1400 W	1800 W	1200 W	1250 W	1800 W
	per channel @ 4 Ω (asymmetrical)**	2200 W	2500 W	3600 W	1200 W	2100 W	2300 W
	per channel @ 2 Ω (asymmetrical)**	1600 W	3800 W	4600 W	1200 W	1600 W	1800 W
	@ 4 Ω Bridged	3000 W	6000 W	8000 W	1500 W	3000 W	3600 W
	@ 8 Ω Bridged	3000 W	5000 W	6400 W	1500 W	3000 W	4000 W
	Maximum unclipped output voltage	145 V _{peak}	145 V _{peak}	175 V _{peak}	145 V _{peak}	145 V _{peak}	175 V _{peak}
	Maximum output current	50 A _{peak}	100 A _{peak}	110 A _{peak}	50 A _{peak}	50 A _{peak}	55 A _{peak}

*Calculated by driving and loading symmetrically all the channels.

**Calculated by driving all channels, but with every second channel at -6dB

	Power & Thermal	T302	T602	T902	T304	T604	T904
@ 120 V	Standby	Power	13.5	15	15	15	15 W
	Idle	Power	23	32	33	32	34 W
	1/8 Power @ 4Ω	Power	517	824	1073	1054	1702 W
		Current Draw	4.6	7.6	9.6	4.7	9.5 A _{rms}
		Thermal Loss	485	678	931	537	1039 BTU/h
@ 230V	Standby	Power	14	16	16	16	16 W
	Idle	Power	23	32	33	32	34 W
	1/8 Power @ 4Ω	Power	527	839	1068	525	1027 W
		Current Draw	2.7	4.3	5.3	2.7	5.2 A _{rms}
		Thermal Loss	517	731	913	512	944 BTU/h

Power supply		Universal regulated switch mode with PFC, SRM					
Nominal voltage (±10%)		100-240 VAC @ 50-60Hz					
Operating Voltage		90-264 VAC @ 50/60 Hz					
AC Mains connector		IEC C20 inlet (20 A max) region-specific power cord provided					
Networking							
Standards compliance		auto sensing Gigabit Ethernet IEEE 802.3ab					
Supported topologies		Daisy chain, Star					
Remote interface		ArmoníaPlus™					
Construction		T302	T602	T902	T304	T604	T904
Dimensions		484 x 405 x 44.5 mm (19 x 16 x 1.75 in)					
Weight		6.7 kg	7.5 kg	7.8 kg	7.1 kg	7.5 kg	7.8 kg

