

DRC 03N AUDIO CONTROL PANEL WITH OLED DISPLAY



FEATURE

- 1.31" OLED display.
- Offers a customized user interface and 32 menus.
- Supports User Datagram Protocol (UDP)
- Powered by PoE (IEEE 802.3af)
- Performs basic or complex operations such as volume and mute control, preset selection, scenario combination, etc.
- 1 programmable OLED display.
- Mounting options include wall or table mount.
- Integrates easily with DynePro Dante Audio Processors.




Specifications

Ethernet Port	1 LAN (RJ-45)
Power Consumption	< 100 mW
PoE Standard	IEEE 802.3af (PoE)
PoE Signaling	Powered Device (PD)
PoE Power	< 100 mW (peak power)
General	
Material	Metal
Color	White
Operating Temperature	0 to +40 °C
Humidity	10% to 90% RH (non-condensing)
Dimensions (WxDxH)	85x35x85 mm
Weight	300 g

DRC 03N AUDIO CONTROL PANEL WITH OLED DISPLAY

EXAMPLE CONNECTION DIAGRAM

Solution 1: Training room (zone A,B...)

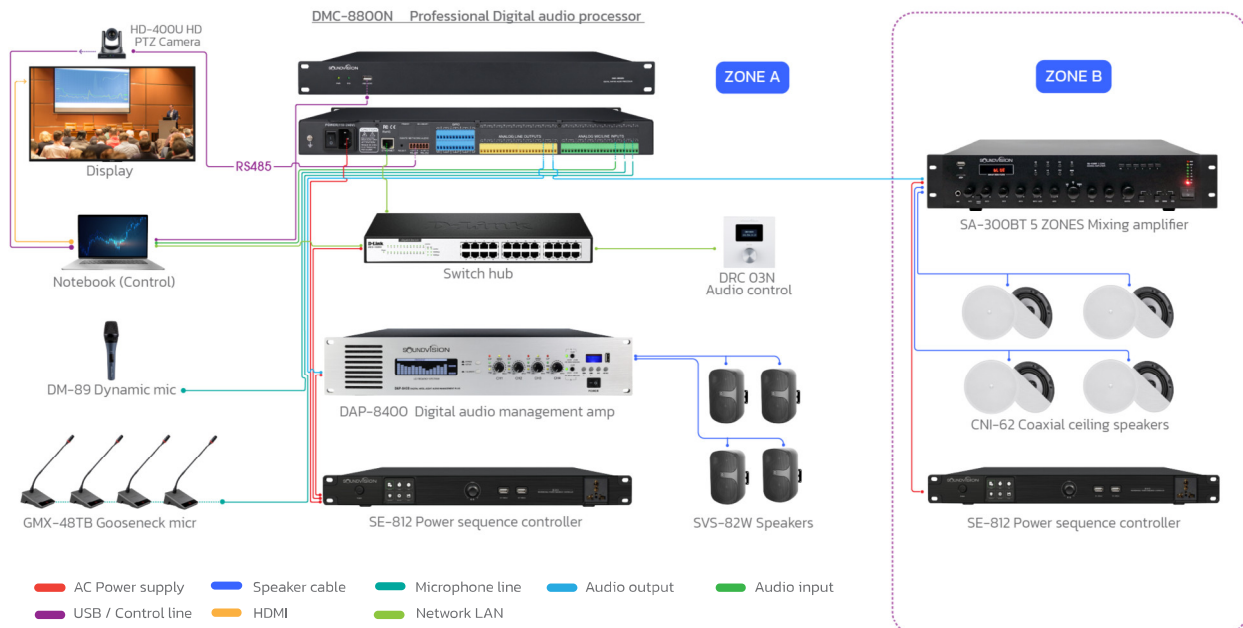

Solution 2: Training room / conference room

