



► NEUMANN.BERLIN

► NDH 20

Quick Guide

Kurzanleitung

Guide rapide

Guida rapida

Guía de inicio rápido

Pikaohje

Γρήγορος οδηγός

Kısa Kılavuz

Краткая инструкция

Guia rápido

Beknopte handleiding

Krótką instrukcja obsługi

Snabbguide

Kort vejledning


快速指南

クイックガイド

퀵 가이드




PUBL 02/19 · 581369/A02

GEORG NEUMANN GMBH · LEIPZIGER STR. 112 · 10117 BERLIN · GERMANY
TEL +49 (0)30 / 41 77 24 -0 · FAX -50
HEADOFFICE@NEUMANN.COM · WWW.NEUMANN.COM



Quick guide

Safety guide

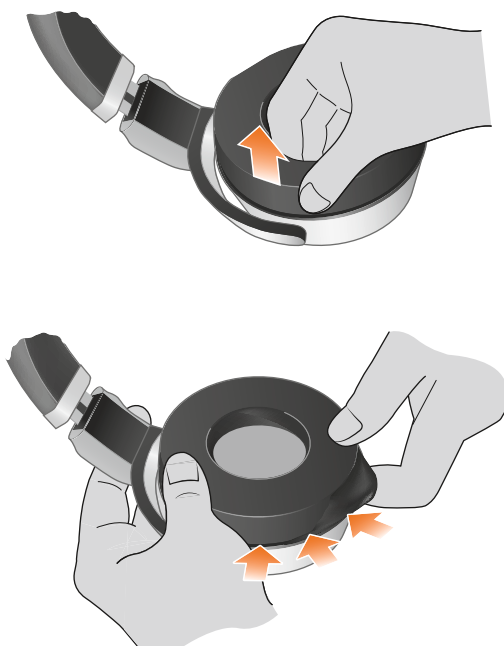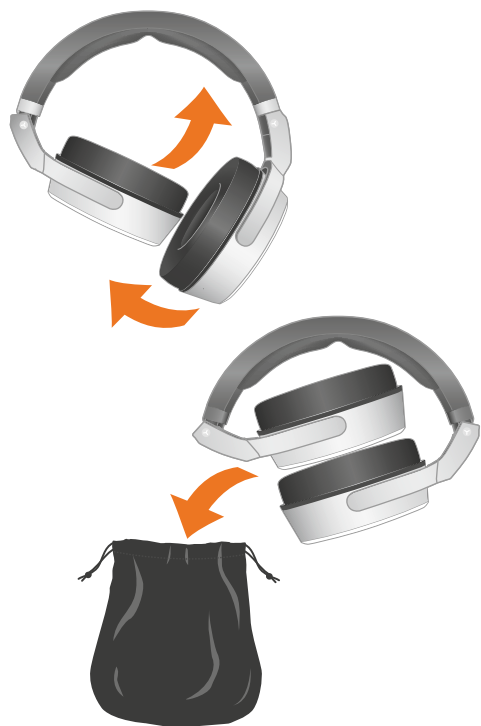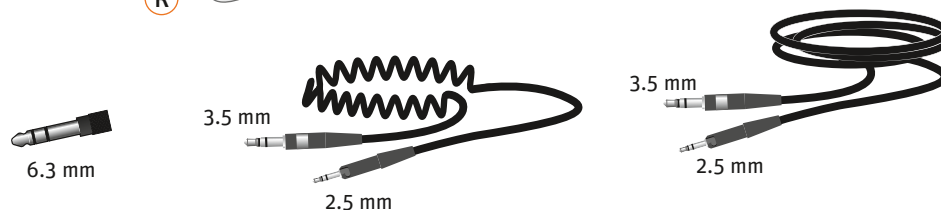

Specifications

Ear coupling	Circumaural
Acoustic principle	Closed back
Transducer	38 mm driver, dynamic, with neodymium magnet
Impedance	150 Ω
Frequency range	5 Hz - 30 kHz [-3 dB]
Peak power handling	1000 mW
Continuous power handling	200 mW
Sound pressure level	114 dB SPL [1 kHz, 1 Vrms]
Total harmonic distortion (THD)	< 0.1 % [1 kHz, 100 dB SPL]
Magnetic field strength	4 mT
Weight	388 g (without cable)

Environmental conditions

Operating temperature	+5 °C to +45 °C (41 °F to 113 °F)
Storage temperature	-15 °C to +70 °C (5 °F to 158 °F)
Relative humidity	≤ 90 %