



## CP10

### Applications

- ④ Conference room
- ④ Church
- ④ Fill system

### Feature


- ④ 75mm HF compression driver
- ④ Low frequency response extend to 50Hz
- ④ Excellent vocal performance

### Technical specification


- ④ **FREQUENCY RESPONSE:** 65 Hz~18 kHz( $\pm 3$  dB) 55 Hz~20 kHz(-10 dB)
- ④ **NOMINAL COVERAGE** ( $\pm 5$  dB): 80° (H) 80° (V) Constant directivity
- ④ **SENSITIVITY** (@1w/1m): 96 dB SPL
- ④ **POWER RATING** (AES): 350W
- ④ **NOMINAL IMPEDANCE:** 8 ohm
- ④ **MAXIMUM SPL:** 121dB SPL 127dB SPL peak
- ④ **DRIVERS:** L F: 1X10" driver  
H F: 1X3" (75mm voice coil) compression driver

### Physical data


- ④ **DIMENSIONS** (HxWxD): 420x310x310mm / 16.5"x12.2"x12.2"
- ④ **WEIGHT:** 18 kg / 39.7lbs
- ④ **CONNECTORS:** NEUTRIK NL4MP +2
- ④ **SPEAKER CABLES:** 1+1-
- ④ **MATERIALS:** 15mm, 18mm multi-plywood
- ④ **FINISH:** Black polyurea paintings
- ④ **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

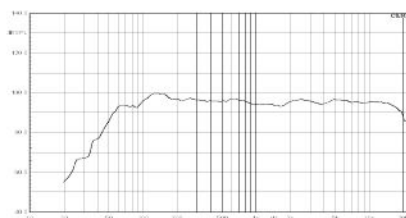


Frequency response

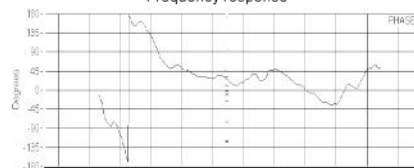


Phase response

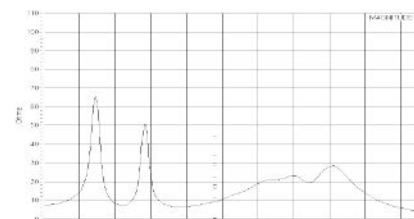

Impedance



Front



Top



Side