


CP12

Applications


- Conference room
- Church
- Fill system

Feature


- 75mm HF compression driver
- Low frequency response extend to 50Hz
- Excellent vocal performance

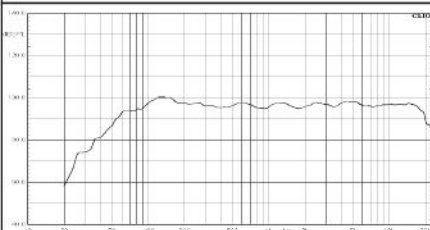

Frequency response

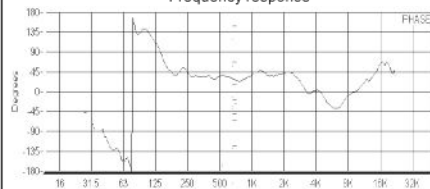

Phase response

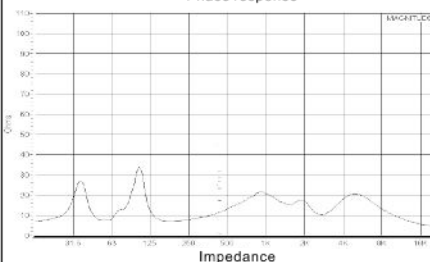

Impedance



Technical specification

- **FREQUENCY RESPONSE:** 60 Hz~16 kHz(± 3 dB) 45 Hz~18 kHz(-10 dB)
- **NOMINAL COVERAGE** (HdB): 80° (H) 80° (V) Constant directivity
- **SENSITIVITY** (@1w/1m): 97 dB SPL
- **POWER RATING** (AES): 400W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 123dB SPL, 129dB SPL peak
- **DRIVERS:** L.F: 1X12" driver
H.F: 1X3" (75mm voice coil) compression driver

Physical data

- **DIMENSIONS** (HxWxD): 480*370*370mm / 18.9"x14.6"x14.6"
- **WEIGHT:** 22 kg / 48.5 lbs
- **CONNECTORS:** NEUTRIK NL4MP *2
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 15mm, 18mm multi-plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

