


LA18S

Applications


- ① Living performance
- ② Theatre and multi-function hall
- ③ Church

Feature

- ① Subwoofer with LA210
- ② Vented, horn preposition design
- ③ Direct radiation 18inch woofer
- ④ Large inverting hole reducing airflow sound

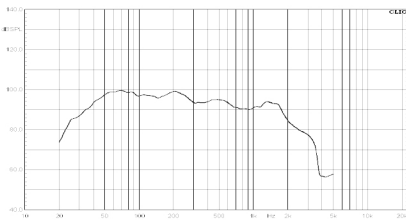

Frequency response

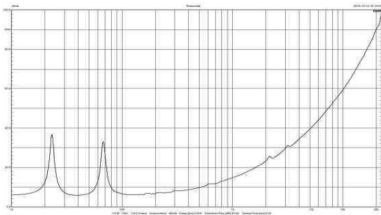


Impedance

Technical specification


- ① FREQUENCY RESPONSE: 32 Hz-180 Hz(± 3 dB) 30 Hz-250 Hz(-10 dB)
- ② NOMINAL COVERAGE^(-6dB): Omnidirectional
- ③ SENSITIVITY(@1w/1m): 99 dB SPL
- ④ POWER RATING(AES): 800W
- ⑤ NOMINAL IMPEDANCE: 8 ohm
- ⑥ MAXIMUM SPL: 135 dB(peak)
- ⑦ DRIVERS: 1 x 18" (75mm voice coil) subwoofer

Physical data


- ① DIMENSIONS(HxWxD): 530 x 730 x 600mm
- ② WEIGHT: 42 kg / 93 lbs
- ③ CONNECTORS: 2 x NL4MP Neutrik Speakon connectors
- ④ SPEAKER CABLES: 1+1-
- ⑤ MATERIALS: 18mm, 24mm birch multi-plywood
- ⑥ FINISH: Black polyurea paintings
- ⑦ GRILLE: Black epoxy mesh grille with acoustically reticulated foam



Front



Side



Top