

## LA18S

### Applications

- Living performance
- Theatre and multi-function hall
- Church

### Feature

- Subwoofer with LA210
- Vented, horn preposition design
- Direct radiation 18inch woofer
- Large inverting hole reducing airflow sound




### Technical specification


- **FREQUENCY RESPONSE:** 32 Hz-180 Hz( $\pm 3$  dB) 30 Hz-250 Hz(-10 dB)
- **NOMINAL COVERAGE** (-6dB): Omnidirectional
- **SENSITIVITY**(@1w/1m): 99 dB SPL
- **POWER RATING**(AES): 800W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 135 dB(peak)
- **DRIVERS:** 1 x 18" (75mm voice coil) subwoofer

### Physical data


- **DIMENSIONS**(HxWxD): 530 x 730 x 600mm
- **WEIGHT:** 42 kg / 93 lbs
- **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 18mm, 24mm birch multi-plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

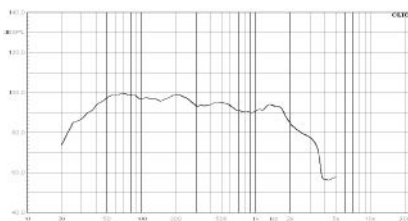


Frequency response

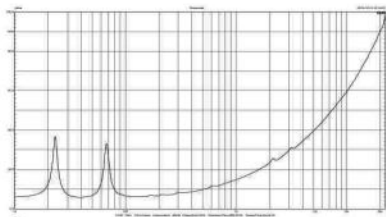


Impedance



Front



Side



Top