



P15

Applications

- Bar
- Theatre
- Stage Monitor

Feature


- Frequency response special design to avoid auditory fatigue
- Rotatable and asymmetrical horn
- 13x M8 rigging points
- Pole mount socket

Technical specification


- **FREQUENCY RESPONSE:** 60 Hz-18 kHz(± 3 dB) 45 Hz-20 kHz(-10 dB)
- **NOMINAL COVERAGE^(-6dB):** 50°~100°(H) 55°(V) Constant directivity
- **SENSITIVITY(@1w/1m):** 98 dB SPL
- **POWER RATING(AES):** 450W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 130 dB(peak)
- **DRIVERS:** LF 1 x 15" (75mm voice coil) woofer
HF 1 x 44mm voice coil compression driver

Physical data



- **DIMENSIONS(HxWxD):** 706 x 446 x 446mm / 28"x18"x18"
- **WEIGHT:** 31 kg / 68 lbs
- **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 18mm, 24mm birch plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

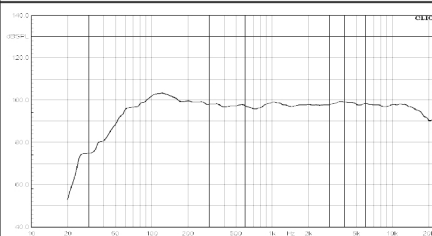


Frequency response

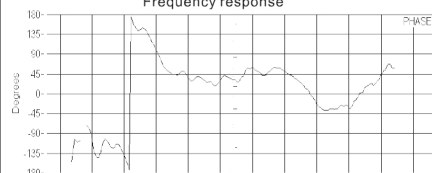


Phase response

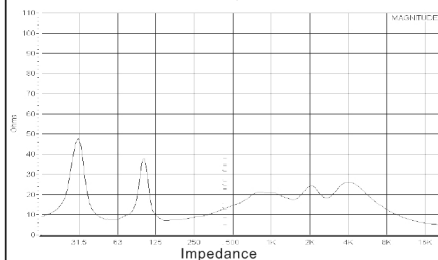

Front



Top



Side