



S28

Applications


- Touring performance
- Club, multi-function hall
- Church

Feature

- Vented, horn preposition design
- 75mm voice coil, high transient response woofer
- Thick and elastic hearing

Technical specification


- **FREQUENCY RESPONSE:** 32 Hz-180 Hz(± 3 dB) 30 Hz-250 Hz(-10 dB)
- **NOMINAL COVERAGE**($\pm 90^\circ$): Omnidirectional
- **SENSITIVITY**(@1w/1m): 102 dB SPL
- **POWER RATING**(AES): 1600W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 141 dB(peak)
- **DRIVERS:** 2 x 18" (75mm voice coil) subwoofer

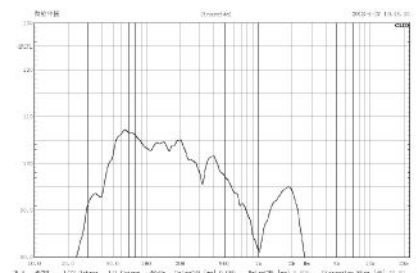


Frequency response

Physical data


- **DIMENSIONS**(HxWxD): 561 x 1165 x 670mm
- **WEIGHT:** 76 kg / 168 lbs
- **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 18mm, 24mm birch plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

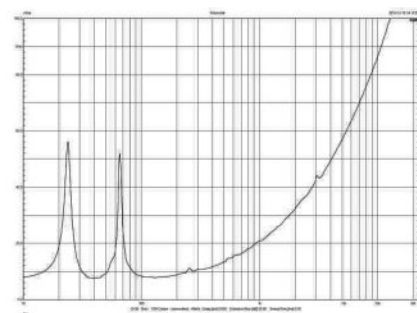

Impedance



Front



Side



Top