



## S218B

### Applications

- Disco
- Club and Kuba

### Feature


- Vented subwoofer
- 18" direct-radiation driver
- Heat resisting 4" (100mm) voice coil
- Large-scale vented design to reduce airflow noise

### Technical specification


- **FREQUENCY RESPONSE:** 32 Hz-180 Hz( $\pm 3$  dB) 30 Hz-250 Hz(-10 dB)
- **NOMINAL COVERAGE<sup>(1)</sup>:** Omnidirectional
- **SENSITIVITY(@1w/1m):** 102 dB SPL
- **POWER RATING(AES):** 2400W
- **NOMINAL IMPEDANCE:** 4 ohm
- **MAXIMUM SPL:** 141 dB(peak)
- **DRIVERS:** 2 x 18" (100mm voice coil) subwoofer

### Physical data


- **DIMENSIONS(HxWxD):** 561 x 1170 x 691 mm / 22"x46"x27"
- **WEIGHT:** 76 kg / 168 lbs
- **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 18mm, 24mm birch plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

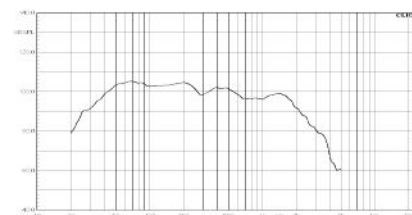


Frequency response

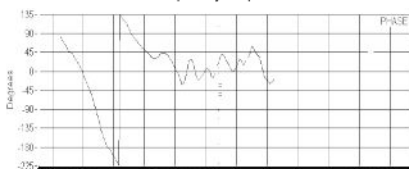


Phase response

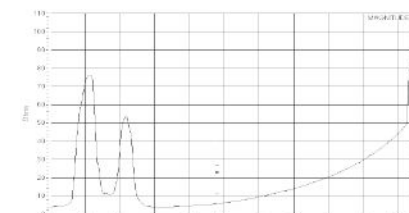


Impedance



Front



Top



Side