



## SW218

### Applications

- Middle and large touring performance
- Stadium

### Feature


- Neodymium high-sensitivity driver, maximum headroom
- High-power output cabinet
- Ultra-low frequency limiting
- Multiple ergonomic handles on each side

### Technical specification


- **FREQUENCY RESPONSE** 30 Hz ~ 200 Hz (  $\pm 3$  dB ) / 25 Hz ~ 250 Hz ( -10dB )
- **NOMINAL COVERAGE** (  $\pm 0$  dB ) Omnidirectional
- **SENSITIVITY** ( @1w/1m ) 98 dB SPL
- **POWER RATING** ( AES ) : 3000W ( AES )
- **NOMINAL IMPEDANCE** 4 ohm
- **MAXIMUM SPL** : 138 dB SPL peak
- **DRIVERS** : 2x18" neodymium woofer ( 135mm voice coil )

### Physical data


- **DIMENSIONS** ( HxWxD ) 560.5 x 1340 x 700mm
- **WEIGHT** : 82 kg
- **CONNECTORS** : 2 x NL4 connectors
- **SPEAKER CABLES** 1+1-
- **MATERIALS** : 15mm 18mm 24mm Baltic birch plywood
- **FINISH** : Black Polyurea paintings
- **GRILLE** : Black epoxy mesh grille with acoustically reticulated cloth

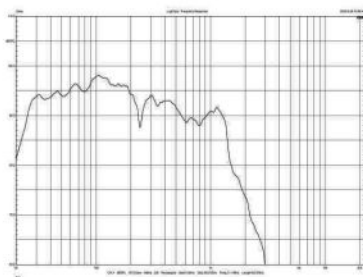


Frequency response

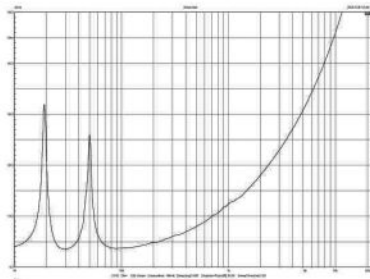


LF Impedance



Front



Top



Side