


## X112

### Applications


- ① Touring performance
- ② Stadium
- ③ Theatre

### Feature

- ① Large-scale, bi-amp, two way line array
- ② Presettable angle on the ground adjustable angle with manual hoister in the air
- ③ Neodymium high-sensitivity driver, maximum headroom

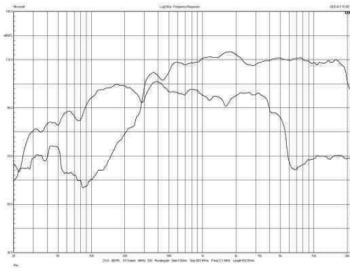

Frequency response

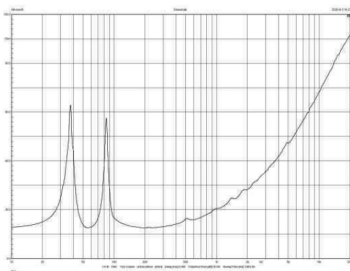


LF Impedance

### Technical specification


- ① FREQUENCY RESPONSE: 60 Hz ~ 16 kHz ( $\pm 3$  dB) 50 Hz ~ 18 kHz (-10 dB)
- ② NOMINAL COVERAGE<sup>(-6dB)</sup>: 10°(V) 100°(H) adjustable
- ③ SENSITIVITY(@1w/1m): HF:112 dB SPL / LF:96 dB SPL
- ④ POWER RATING(AES): HF/ILF:80W/450W
- ⑤ NOMINAL IMPEDANCE: HF/ILF:16/16 ohm
- ⑥ MAXIMUM SPL: HF:137 dB SPL peak  
LF:128 dB SPL peak
- ⑦ DRIVERS: LF 1 x 12" (75mm Voice coil) woofer  
HF 1 x 3" compression driver

### Physical data


- ① DIMENSIONS(HxWxD): 387 x 730 x 465 mm
- ② WEIGHT: 34 kg
- ③ CONNECTORS: 2 x NL4 connectors
- ④ SPEAKER CABLES: 1+1-...LF, 2+2-...HF
- ⑤ MATERIALS: 18mm, 24mm Baltic birch plywood
- ⑥ FINISH: Black Polyurea paintings
- ⑦ GRILLE: Black epoxy mesh grille with acoustically reticulated cloth
- ⑧ RIGGING: 0, 1, 2, 3, 4, 5, 6, 7.5 degree adjustable



Front



Top



Side