

KA11 - 11" Countertop/ On-Wall Touchpanel

The KA11 touchpanel provides simple, intuitive control of the entertainment, environment and security systems in residential or commercial settings. The sleek touchpanel features a fully customizable 11.6" widescreen LCD display with an integrated capacitive touchscreen for swiping through pages and menus. The innovative KA11 is programmable in landscape or portrait mode and comes equipped with sensors to automatically wake the unit and adjust the screen brightness as a user approaches.

Installation is easy using the included wall bracket or an accessory stand is available for table top installations. In addition, only one Ethernet connected Cat-5/6 cable is required to power the unit and enable control via the RTI ecosystem.


Key Features

- 11.6" widescreen LCD with 1920x1080 Full HD resolution and integrated capacitive touchscreen, supporting multi-touch and gesture.
- Fully customizable interface can be programmed in portrait or landscape mode.
- Innovative design allows wall mount in dual gang electrical box or table top installation using stand accessory (sold separately).
- Ambient light and proximity sensor adjusts the screen brightness and LED backlights automatically according to the environmental light level.
- Powered by PoE (Power over Ethernet) or a power supply (sold separately).
- Gigabit Ethernet with PoE enables two-way control via the RTI control system, video from IP security cameras, and remote programming updates.

Included in the Box

KA11, mounting bracket (1), mounting screws (4), 2-gang low voltage bracket (1)

The Tabletop Stand is sold separately

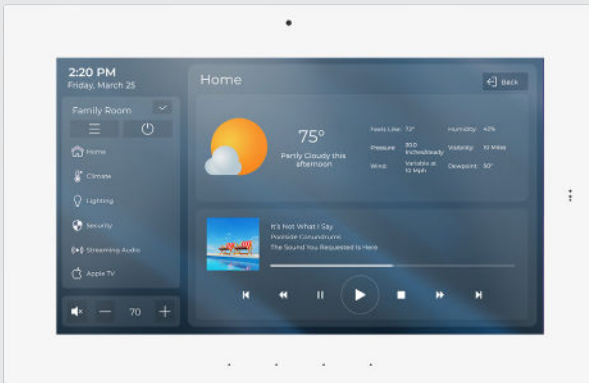

Installation Options



Countertop installation with accessory table stand



On-wall installation uses two-gang wall bracket & adapter


Specifications

Power (Power Supply not included)	+24V DC, 1A or PoE (802.3af)
Power Management	Adjustable backlight/ proximity sensor
Touchscreen Display	High-brightness color IPS LCD Full HD (1920x1080 pixels) with 16.7M colors Integrated high-resolution projected capacitive touchscreen
Display Size	11.6 in (294 mm) diagonal
Display Backlight	LED Backlit, 350nit
Ethernet Port	RJ-45, 10/100/1000 Base-T with Power-over-Ethernet
Camera	Color CMOS, 8MP, 30FPS
Microphone	Built-in Microphone, Echo cancellation and noise suppression. Voice activity detection
Speakers	Two (2), Stereo 2 Watt
Communications	Ethernet / Network IP
System Memory	2GB DDR3, 8GB eMMC Flash
Device Capability	Total number of devices is limited only by memory
Macro Capability	Total number of macros is limited only by memory
Operating Temperature	+32°F to +122°F (0°C to +50°C)
Operating Humidity	5% to 95% Non-condensing
Mounting	Tabletop with Aluminum Stand or Wall-Mount

Installation	US standard 2 gang. Low voltage bracket (included)
Outer Bezel Dimension (W x H)	12.4 in x 7.9 in 313 mm x 201 mm
Depth in Wall	0.83 in (21mm)
Weight	1.78 lb (807g)
Warranty	Three Years (Parts & Labor)


All Specifications subject to change without notice.

Features

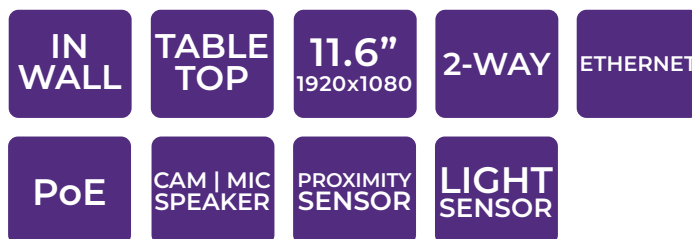

Do more with Integration Designer 11

Integration Designer 11 elevates the experience for all RTI systems, from residential to commercial. Its stunning new template - complete with custom slider support, one-click background swapping and more - makes it faster than ever to deliver a beautiful finish to every installation. Drivers are directly accessible from within the software, with notifications to keep you always up to date. The integrated system manager lets you track rooms, rooms status, and source status to save time on every installation. All this and more in [Integration Designer 11](#).

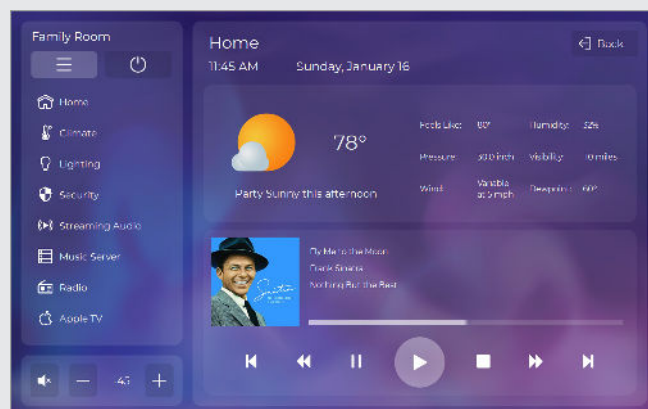

The Tabletop Stand is sold separately