



AcousticDesign™ Series AD-S112sw

Small format, surface
mount subwoofer

Features

- APF™ (Angulate Pressure Flow) port optimizes resonant tuning and woofer performance
- Included yoke bracket and M10 fittings for optional suspension
- Lightweight ABS enclosure offer long-term durability and lasting good looks
- Sealed input panel cover and powder coated aluminum grilles for added weather resistance
- Meets IEC60529 IP-54 for dust and splash resistance
- Available in black (RAL 9011)
- Complete EASE, CAD & BIM information available online



Yoke-Mount (included)

**Restaurant · Retail · Dance/Music Clubs · Audio Visual · Education · Casinos ·
Themed Entertainment · Large System Ancillary Support · Worship Facilities**

The QSC AcousticDesign™ AD-S112sw is a low impedance, surface mounted, 12" direct radiating subwoofer. An ideal companion to AcousticDesign™ full range models, the AD-S112sw allows impressive low frequency expression within a complimenting form factor, suitable of demanding foreground and background sound reinforcement applications.

AcousticDesign™ series offers integrators a premium quality installed sound solution where performance, coverage, and aesthetics are paramount. Combined with unprecedented ease-of-installation and high weather resistance, the AcousticDesign™ series provides integrators a versatile and confident install solution.

The AD-S112sw features a high quality 12" weather treated paper cone woofer on a 2.5" voice coil. To maximize enclosure resonance and woofer performance, QSC's innovative APF™ (Angulated Pressure Flow) port achieves unparalleled efficiency, allowing frequency extension down to 30Hz.

Taking full advantage of boundary plane coupling and to reduce vibration transmission, the AD-S112sw ships with an included yoke mount assembly. Additional M10 fittings on the enclosure allow suspended or flown deployments using the optional accessory M10 KIT-C.

With rugged ABS enclosures, sealed input panel covers, and powder-coated aluminum grilles for weather resistance, the AcousticDesign™ surface mounted series exceed IEC60529 IP-54 ratings for dust and splash resistance.

The AcousticDesign™ series feature a stylish appearance free of obtrusive logo adornments for aesthetically sensitive installations. Complimenting adjacent product families, the AD-S112sw is available in QSC standard black (RAL 9011) and may be painted to match any decor.


To assist in successful systems integration, complete EASE, CAD, and BIM files are available for online download at QSC.com.

Certified for



Microsoft Teams

AD-S112sw Details

Impedance / Frequency

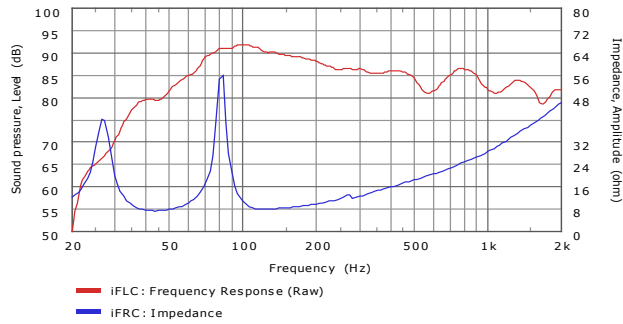

Dimensions:

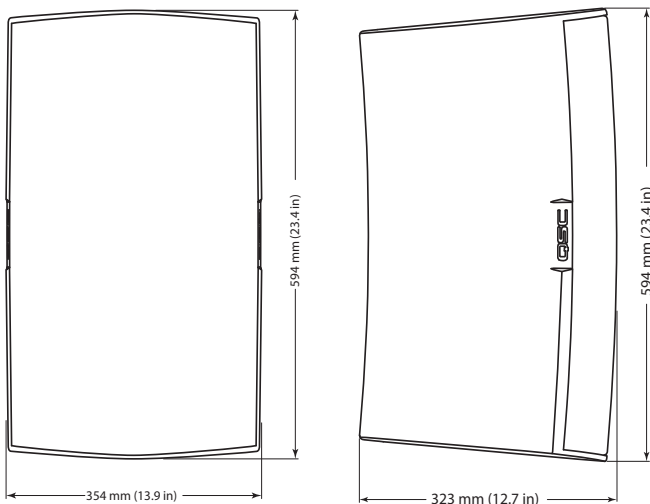

Specifications:

| System Details | AD-S112sw |
|--|--|
| Effective frequency range ¹ | 30 – 135 Hz |
| Rated noise power / voltage ² | 300 watts / 50 volts (rms) |
| Broad-band sensitivity ³ | 90 dB SPL |
| Maximum continuous SPL ⁴ | 115 dB |
| Maximum peak SPL ⁴ | 121 dB |
| Rated impedance | 8 ohms |
| Recommended amplifier power | 600 watts (rms) |
| LF transducer | 12" weather resistant paper cone woofer, 2.5" / 64mm voice-coil |
| Input connector type | Euroblock connector with parallel output |
| Enclosure material | Painted ABS polymer |
| Grille material | Powder coated aluminum |
| Yoke material | Powder coated galvanized steel |
| Enclosure Details | |
| Ingress protection | IP-54 |
| Operating environment | Designed for indoor and outdoor use |
| Testing | The AD Series loudspeakers qualified for outdoor use using the following tests: Salt fog: MIL-STD-810G Method 509.5 for 100 hrs. Humidity: MIL-STD-810G Method 507.5, Natural cycle B2, cyclic high RH for 7 days High and low temperature: tested according to QSC internal standards between -20° and 50° C |
| Operating Temperature | -20 to 50 °C / -4 to 122 °F |
| Net weight | 29 lbs / 13.2 kg |
| Product dimensions | 23.4" x 13.9" x 12.7" (594 x 354 x 323mm) |
| Shipping weight | 43.1 lbs / 19.6 kg |
| Shipping dimensions | 27.5" x 21.75" x 18.5" (698 x 552 x 470mm) |
| Included accessories | Yoke mounting system, euroblock connector, input panel cover |

¹ Free-field, -10 dB from on-axis sensitivity

² IEC60268-1 noise signal for 2 Hrs

³ On-Axis, free-field sensitivity, 2.83V, 1 m

⁴ Calculated from rated noise voltage and sensitivity

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.



1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174

please recycle

© 2020 QSC Audio Products, LLC. All rights reserved. QSC and the QSC logo are registered trademarks of QSC Audio Products, LLC in the U.S. Patent and Trademark office and other countries. DMT, Intrinsic Correction, and X-Mount are trademarks of QSC.