

SC-1120

Screen Channel Loudspeaker for Small Rooms

Features

- Single enclosure two-way screen channel loudspeaker
- Optimized for small room applications up to 35 feet (11 meters) from screen to last row of seating
- Requires less than 12 inches (305 mm) behind screen
- Passive crossover requires only one amplifier channel
- 90° Axisymmetric horn
- 12" (305 mm) woofer with 2.5" (63 mm) voice coil
- 1.75" (44 mm) voice coil HF compression driver
- Screw-type barrier-strip connectors



The SC-1120 extends QSC's commitment to the cinema market by offering high-quality QSC sound for small room systems. As a member of the DCS Digital Cinema Series, the SC-1120 is a cost-effective screen channel loudspeaker for cinemas no longer than 35 feet (11 meters) from the screen to the last row of seating. The SC-1120 features a 12" (305 mm) woofer with 2.5" (63 mm) voice coil for exceptional low frequency bandwidth reproduction. The LF driver crosses over into a high frequency compression driver with 1.75" (44 mm) voice coil. Both drivers are combined in a single enclosure, simplifying installation.


The SC-1120 provides coverage over a 90° angle, ideal for small room cinema sound applications. Installation is as simple as removing the SC-1120 from its carton and positioning it behind the screen. The enclosure was designed to be mounted on a platform and its shallow depth (less than 12 inches or 305 mm) dramatically reduces space requirements behind the screen.

SC-1120 Details

System Details	SC-1120
Rated Coverage Angle (-6 dB)	90 degrees Axisymmetric
Frequency Range ¹ (-10dB)	48 Hz to 19 kHz
Rated Noise Power (Voltage) ²	300 W
Sensitivity ³	95.5 dB
Maximum continuous SPL ⁴	120 dB
Maximum peak SPL ⁴	126 dB
Rated Impedance	8Ω
Maximum Recommended Amplifier Power	600 Watts
Transducers	LF: 12" (305 mm) woofer, 2.5" voice coil HF: Compression driver with 1.75" (44 mm) voice coil
Enclosure Details	
Input Connector	4-position barrier strip
Enclosure Material	MDF, non-reflective black vinyl
Grille	None
Dimensions (HxWxD)	27.2 x 19.5 x 11.7 inches (690 x 497 x 297 mm)
Net Weight	51 lb (23.2 kg)

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

- 1 Free-field, unprocessed, -10 dB from on-axis sensitivity
- 2 AES2-1984 noise signal for 2 hrs
- 3 On-Axis, free-field sensitivity, 2.83V, 1 m
- 4 Calculated from rated noise voltage and sensitivity

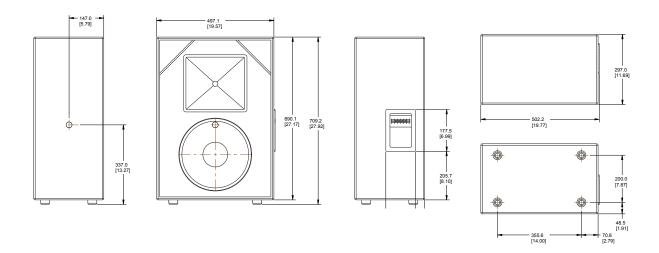

Specifications subject to change without notice.



