




FLEXY^M

PROFESSIONAL ACTIVE LINE ARRAY SPEAKER SYSTEM

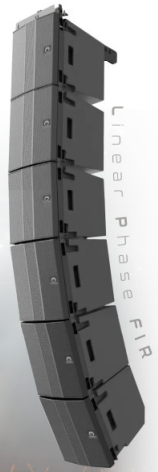

Linear Phase FIR



62LA
ACTIVE LINE ARRAY

155A
ACTIVE SUBWOOFER

FLEXY M is powerful sound Line Array Speaker System, this series adapting to different preferences and scale of applications. With high performance offers various combinations and choices always herewith a proper solution that meets your need.

- Powerful sound active Line Array Speaker System
- Amplifier Bi-Amp CLASS-D / Power output 2000Watts
- Built-in DSP Setup
- Coverage angle(Horizontal x Vertical): 120° x 10°
- Unique FIR filter technology

SPECIFICATIONS

FLEXY M	62LA ACTIVE LINE ARRAY	155A ACTIVE SUBWOOFER
Type	2 way active vented design	Active vented subwoofer
Frequency Response	65 ~ 20KHz	40 ~ 120Hz
Maximum SPL	132dB	134dB
Crossover Point	630Hz	Selectable 100Hz, 120Hz
Sensitivity input Selectable	+3dBV, 0dBV, -3dBV, -6dBV	-
Driver LF	6 x 4.2"woofer + 6 x 2" full range line array	15" subwoofer, 3" Voice Coil
Dispersion Angle (H x V)	H 120° x V10°	-
Signal Connectors (I/O)	Input : XLR Output : XLR link	Input : 2 x XLR Output : 2 x XLR link
Power I/O	POWERCON	POWERCON
Volume	Volume control	Volume control
Amplifier	Bi-Amp Class-D	Class-D
Power output (RMS)	LF: 500W + HF: 500W TOTAL 1000W	1000W
Power output (MAX)	2000W	2000W
Feature functions	DSP Setup Switching power design LED power / signal / clip indicator FIR filter design, flat phase curve	LCD with multiple DSP Switching power design LED power / signal / clip indicator Phase switchable (0/180) Delay value adjust, 100ms max
Cabinet	Birch Plywood with polyurea painted finish	Birch Plywood with polyurea painted finish
Grille	1.0mm steel	1.5mm steel
Pole support	Double holes 35mm Steel bottom holder	M20 screw pole
Rigging and handling	Inter-enclosure angles 0,1,2,3,4,6,8,10°	Inter-enclosure angles 0° (Stacking)
Built-in Pin Lock support	5 points	4 points
Flybar support	Flybar+rope	-
Fuse	T4AL 250V	T6.35AL 250V
Operating voltage	AC 220V-240V, ~50/60Hz	AC 220V-240V, ~50/60Hz
Dimensions (H x W x D)	367 x 315 x 402mm	623 x 443 x 660mm
Packed Dimensions (H x W x D)	485 x 430 x 495mm	775 x 575 x 800mm
Net Weight	13.6kgs	37.5kgs
Gross Weight	18kgs/1pc	44kg/1pc



FLEXY M APPLICATION

Rigging System
Fixed Installation
Ground Stacked
Main PA
Live Sound & Tour

ACCESSORIES

Flexy M Flybar



Flexy M Pole



Flexy M 155A (Rear)

SOUND VISION CO., LTD.

9 Chaiphayphruok Rd., Taling Chan, Taling Chan, Bangkok 10170 Thailand
Email : info@soundvision.co.th Support : 02-433-9988
LINE Official : @soundvision www.soundvisionpro.com

