

PRELIMINARY

-

LRC-1060 loudspeakers are EN54-24 certified, and all models are supported by EASE/EASE Focus3, PREVIEW Loudspeaker Software and by SONICUE System Software.

Technical specifications


Frequency range (-10 dB) ¹	70 Hz – 15,000 Hz
Maximum sound pressure level at a distance of 1 m ²	119 dB
Axial sensitivity ³	90 dB SPL 1W/1m
Coverage angle HxV ⁴	130° x 20°
Power handling (continuous) ⁵	100 W
Power handling (program) ⁶	200 W
Peak input voltage (Lo-Z)	80 V
Nominal impedance (Lo-Z)	8 Ω
Recommended high-pass	≥70 Hz Butterworth, 24 dB/oct
Transformer taps 70 V line	60 W; 30 W; 15 W; 8 W; 4 W
Transformer taps 100 V line	60 W; 30 W; 15 W; 8 W
Transducer (quantity) size	(6) 2.5 in active drivers (2) 2.5 in passive radiators
Connector type	4-pin Euroblock Input + Pass through
Wire size	12AWG (maximum)
Suspension points	(2) M8
Mounting	SwiftTilt Multi-angle Tilt + Pan Bracket

LRC Line Radiator Columns are engineered for use on any system using the recommended high-pass filter, but deliver their best performance when paired with Dynacord DSP matrix processors and amplifiers. These provide dedicated presets which ensure the optimal balance of sound quality, output, and system protection. All models are available in black and white and are suitable for indoor or outdoor use.


Maximum horizontal pan angle	+/- 80° (at all down-tilt angles)
Vertical down-tilt angles ⁷	0°, 2.5°, 5°, 7.5°, 10°, 15°, 20°, 25°
IP rating	FW (outdoor full exposure), IP55c
Color	RAL 9004 Signal black / RAL 9003 Signal white
Dimensions (H x W x D)	22.83 in x 4.13 in x 5.67 in
Dimensions (H x W x D)	580 mm x 105 mm x 144 mm
Weight	9.7 lb
Weight	4.4 kg
Shipping weight	14.33 lb
Shipping weight	6.5 kg
Included hardware	Tilt bracket Pan bracket Gland nut weather cover Dual-ended Allen/TR20 key M8x20 mm eyebolt (pre-installed)

¹-10 dB from rated sensitivity. Measured with Music preset in half-space (wall-mounted) position
²1 m on acoustic axis, half-space, 12 dB crest factor pink noise with Music preset (calculated)
³Unprocessed
⁴Vertical coverage unprocessed. 2 kHz - 13 kHz
⁵100 hrs continuous EN54-24 noise, Lo-Z
⁶20 ms average, Lo-Z
⁷Using included surface-mount bracket

Frequency response

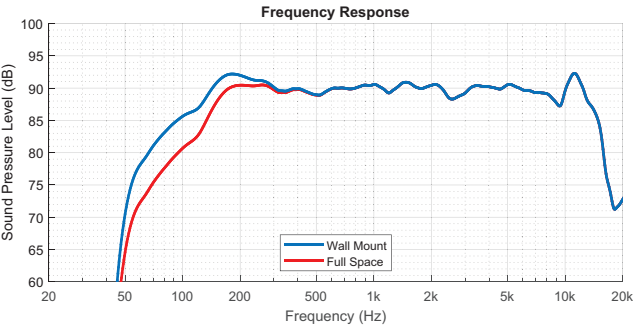

Impedance response

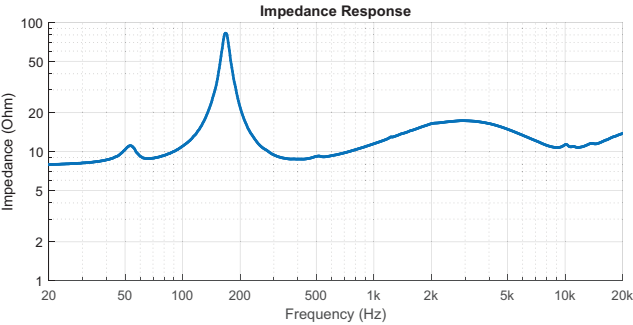


Represented by:

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.electrovoice.com

Bosch Security Systems, LLC
12000 Portland Avenue South
Burnsville MN 55337
USA

Dimensions

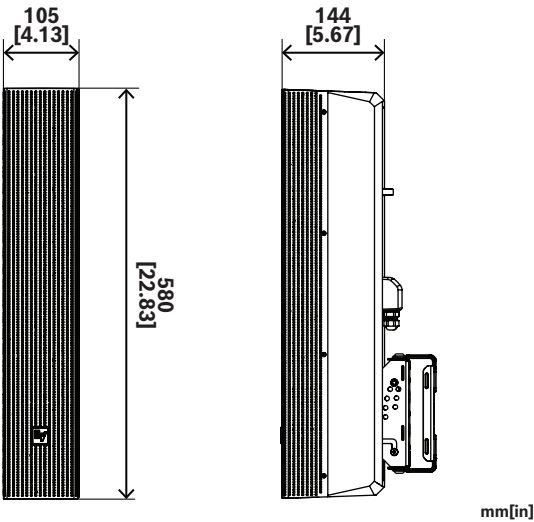

Complementary products

- LRC-1100-B Column speaker, 1m, blk, EN54
- LRC-1100-W Column speaker, 1m, wht, EN54
- LRC-2100-B Column speaker, 2-way 1m blk
- LRC-2100-W Column speaker, 2-way 1m wht

Compatible system solutions, software

- Dynacord SONICUE control software
- Electro-Voice PREVIEW Loudspeaker software
- AFMG EASE and EASE Focus3

Ordering information

LRC-1060-B Column speaker, 0.6m, blk, EN54
Column speaker, 0.6m, black, EN54-certified
Order number **LRC-1060-B | F.01U.417.794**

LRC-1060-W Column speaker, 0.6m, wht, EN54
Column speaker, 0.6m, white, EN54-certified
Order number **LRC-1060-W | F.01U.417.795**