

# The 10S-D loudspeaker



## 10S-D loudspeaker

The 10S-D loudspeaker is a light-weight, high performance loudspeaker in a 2-way passive design using neodymium drivers. The loudspeaker is a single box solution employing a single 10" driver in a bass-reflex enclosure and a HF section with a large horn for accurate pattern control providing rotatable dispersion characteristics of 110° x 55°. It is equipped with a 1.4" exit compression driver.

With a frequency response extending from 60 Hz to 18 kHz, the cabinets can be used as full range systems or supplemented by different subwoofers of the xS or xA-Series.

The enclosure is constructed from marine plywood with an impact resistant black paint finish.

The front of the cabinet is protected by a rigid metal grill backed by an acoustically transparent foam and is Ball Impact Resistant according to DIN 18032-3.

## d&b amplifiers

The d&b audiotechnik loudspeaker range is designed exclusively for operation with d&b amplifiers. These provide power as well as comprehensive control and protection functions tailored to achieve the performance, reliability and longevity associated with the d&b system approach.


## System data

|                                       |                                                              |
|---------------------------------------|--------------------------------------------------------------|
| Frequency response (-5 dB standard)   | 60 Hz - 18 kHz                                               |
| Frequency response (-5 dB CUT mode)   | 100 Hz - 18 kHz                                              |
| Max. sound pressure (1 m, free field) |                                                              |
| with 10D/D6                           | 127 dB                                                       |
| with 30D/40D/D12/D20/D40/D80          | 130 dB                                                       |
|                                       | (SPLmax peak, pink noise test signal with crest factor of 4) |

## Loudspeaker data

|                                          |                                                           |
|------------------------------------------|-----------------------------------------------------------|
| Nominal impedance                        | 12 ohms                                                   |
| Power handling capacity (RMS/peak 10 ms) | 200/1200 W                                                |
| Nominal dispersion angle (hor. x vert.)  | 110° x 55°                                                |
| Components                               | 10" driver with neodymium magnet                          |
|                                          | 1.4" exit compression driver on rotatable waveguide       |
|                                          | Passive crossover network                                 |
| Connections                              | 2 x NL4                                                   |
|                                          | 1 x screw terminal (ST - up to 4 mm <sup>2</sup> /AWG 11) |
|                                          | WR option: Faston type connector (2 x 6.3 mm)             |
| Pin assignment                           | NL4: 1+/1-                                                |
|                                          | WR option: brown + / blue -                               |
| Weight                                   | 13 kg (29 lb)                                             |

# The 10S-D loudspeaker

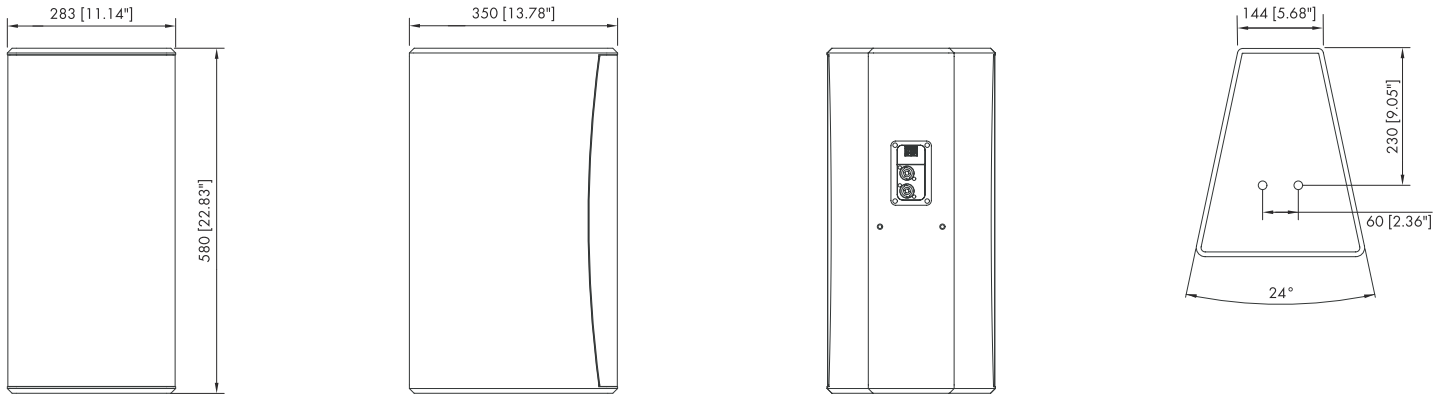

**10S-D cabinet dimensions in mm [inch]**

## Architectural specifications

The 2-way biaxial, passive loudspeaker shall consist of a 10" low frequency driver with a neodymium magnet assembly and a 1.4" neodymium compression driver mounted on a rotatable CD-Horn. The bass-reflex enclosure shall be made from marine plywood with an impact resistant black paint finish. Special colours according to RAL table and a weather resistant option shall be available upon request. The drivers shall be protected by a powder coated metal grill with an acoustically transparent foam.

The cabinet shall be Ball Impact Resistant according to DIN 18032-3 for schools and sports halls.

The cabinet shall incorporate two M8 threaded inserts on the rear panel for the secure attachment of wall mounts. The cabinet shall incorporate one M10 threaded inserts on the top and bottom panel for the secure attachment of mounting brackets.

The connection panel on the back shall be recessed and fitted with two NL4 sockets and a two pole screw terminal block. A cover plate for protection of the connection panel shall be included.

The loudspeaker shall have a nominal dispersion angle of  $110^{\circ} \times 55^{\circ}$  (hor. x vert.).

The loudspeaker shall only be operated by a dedicated, compatible controller amplifier.

The power handling capacity shall be 200 W RMS and 1200 W peak (10ms). The frequency response ( $-5$  dB) measured on axis shall be 60 Hz to 18 kHz with a maximum sound pressure of at least 127 dB or 130 dB respectively when operated with one of its dedicated controller amplifiers. The dimensions (W x H x D) shall not exceed 283 x 580 x 350 mm (11.14" x 22.83" x 13.78") and shall weigh no more than 13 kg (29 lb).

The loudspeaker shall be the 10S-D by:  
d&b audiotechnik GmbH & Co. KG.