

## S 8018 II

### HIGH-EFFICIENCY SUBWOOFER



#### Description

The S8018 II high-efficiency subwoofer is the ideal low-frequency extension to complement RCF installed systems.

The low-frequency transducer is a hypervented vented, high excursion RCF Precision 18" woofer with a 4" inside/outside voice coil to minimize power compression and extend the life of the product.

Using bass-reflex loading the subwoofer design ensures an efficient acoustic response down to 30 Hz. The Baltic birch plywood enclosure is painted with black, heavy duty, textured epoxy. The front is protected by a strong powder coated metal grille. The cabinet features two Neutrik Speakon™ connectors in a recessed input plate. A M20 pole mount adaptor is provided on the top of the cabinet, integrated hand carry points on the cabinet sides.

#### **Features**

- > 18" high-efficiency 4" voice-coil woofer with Inside/Outside Coil Technology
- > 137 dB maximum sound pressure level
- > Response down to 30 Hz
- > Rectangular box enclosure with protective metal grille
- > 35 mm standard pole mount in top section of cabinet
- > Baltic Birch cabinet painted with black, heavy duty, textured epoxy
- > Integrated hand carry points

**Part Number** 

13000390 S 8018 II

8ohm


Black

EAN 8024530010775



# S 8018 I HIGH-EFFICIENCY SUBWOOFER

#### Line Art 2D

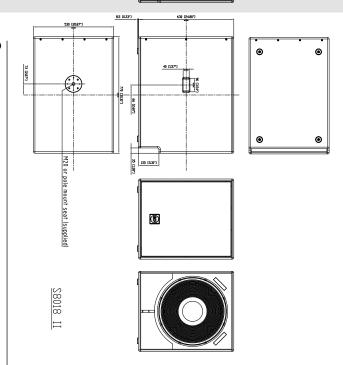

#### **TECHNICAL SPECIFICATIONS**

**Acoustical specifications** 

Frequency Response (-10dB)

Max SPL @ 1m

System Sensitivity

**Power section** 

Amplification

Nominal Impedance

Power Handling

Peak Power Handling

**Transducers** 

Woofer

Input/Output section

Input connectors

Output connectors

Safety agency

Standard compliance

**Physical specifications** 

Cabinet/Case Material

Handles

Pole mount/Cap

Grille

Color

Size

Black Height 639 mm / 25.16 inches

Width 530 mm / 20.87 inches 770 mm / 30.31 inches Depth

30 Hz ÷ 200 Hz

137 dB

100 dB

8 ohm

1500 W

Full Range

6000 W PEAK

18" neo, 4.0" v.c

Speakon® NL4

Speakon® NL4

CE compliant

M20 thread

Metal

Baltic birch plywood

Integrated hand carry points

43 kg / 94.8 lbs Weight

**Technical Specifications** Page 2 of 2