

# EVID-PC8.2 8" Ceiling Speaker System 100w



- High output true compression driver for wide dispersion and superior coverage control out to 10 kHz
- Long throw 8-inch (200 mm) woofer housed in a large vented 14 gauge steel enclosure for extended LF performance down to 40 Hz
- 200 watt power handling provides for 114 dB maximum SPL
- Front baffle transformer tap adjustment switch
- Includes tile rails and “C” mounting ring



The EVID PC8.2 speaker system from Electro-Voice is a complete high performance two-way ceiling speaker package. The EVID PC8.2 is ideal for background and foreground music, voice evacuation, paging, and sound reinforcement applications. All EVID Premium Ceiling Speaker models provide a unique combination of high acoustic output, superb coverage control, high power handling and wide dispersion, to cover virtually any size listening area. The EVID PC8.2 comes completely assembled with an integrated bezel assembly, grille, rear enclosure, 8-inch (200 mm) coaxial two-way speaker and internal high power line-matching transformer. The speaker features a waveguide coupled true compression HF driver and a long excursion 8-inch (200 mm) woofer. The EVID PC8.2 utilizes a transformer that offers a selection of 7.5 W (70-V only), 15, 30 or 60 watts delivered to the speaker system using either 70-V or 100-V lines, or 8 ohm bypass. Selection is via a convenient switch on the front baffle. The perforated grille is fully zinc plated and finished in semi-gloss white powder-coated enamel. The baffle and bezel are constructed from fire rated ABS. The rear enclosure is constructed from zinc-plated, heavy gauge steel. The rear enclosure, with fiberglass damping material, provides an optimum internal volume for extended low-frequency performance. A rear cover, with provisions for a junction box fitting, provides access to a 4-pin terminal

block that allows direct connection to the speaker with up to 2.5 mm (12 AWG) wire and provides pass through to additional speakers. Two adjustable metal tile bridges and metal “C” ring are included for safe suspension of the EVID PC8.2 ceiling systems in a drop ceiling that uses mineral wool, or other fiber based ceiling tiles. The wide range of EVID ceiling speakers has been designed to work together as a complete system in a variety of different ceiling constructions.

## Technical specifications

Frequency Range (-10 dB):	40 Hz - 20 kHz
Coverage (Conical):	120°
HF Power Handling:	200 W Program, 100 W Pink Noise
Sensitivity (SPL 1 W/1 m):	88 dB
Max Calculated SPL:	108 dB Avg, 114 dB Peak
Impedance:	10 ohms
LF Transducer:	200 mm (8 in)
HF Transducer:	35 mm Compression Driver
Transformer Taps:	70V: 60W, 30W, 15W, 7.5W, 8 ohm 100V: 60W, 30W, 15W, 8 ohm

2 | 8" Ceiling Speaker System 100w


Connectors:	Removable locking 4-Pin (Phoenix) 2.5 mm (12 AWG) max wire size
Enclosure:	ABS Plastic (UL94V-0) Baffle, steel back can
Grille:	Color matched steel grille with fabric
Dimensions (H x Dia):	324 mm x 327 mm (12.76 in x 12.87 in)
Cutout Size:	294.3 mm (11.59 in)
Net Weight:	8.0 kg (17.6 lb)
Shipping Weight:	20.23 kg (44.6 lb)
Support Hardware:	C Ring, Tile Bridge
Approvals:	UL1480, 2043; CE

System overview


Architectural and engineering specifications:

The EVID PC8.2 speaker system shall be comprised of a UL 94V-0 fire rated ABS baffle/bezel assembly, zinc plated steel rear enclosure, powder coated grille with safety tether, transformer with 8 ohm bypass, and 8-inch long excursion low frequency transducer with coaxially-mounted true compression HF driver. The speaker shall meet the following criteria: power rating shall be 100 watts of IEC 268-5 pink noise (6 dB crest factor). Frequency response, uniform from 40 Hz – 20 kHz. Pressure sensitivity, 88 dB SPL at 1 meter (3.3 feet) on axis with 1 watt of pink noise (ref. 20μPa). Minimum impedance, 6.0 ohms. The speaker shall be 324 mm (12.76 in) deep and 327 mm (12.87 in) in diameter. Weight shall be 8.0 kg (17.6 lb). The coaxial ceiling speaker shall be the model EVID PC8.2 from Electro-Voice.


Frequency response and impedance:

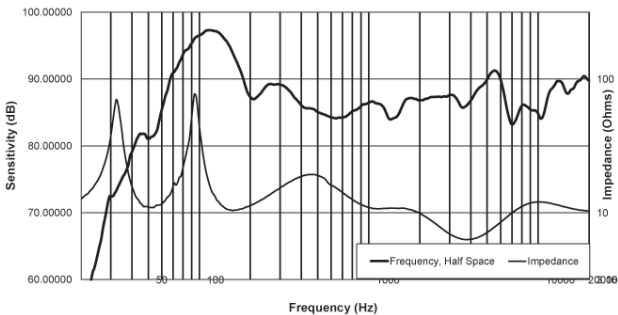


Beamwidth:

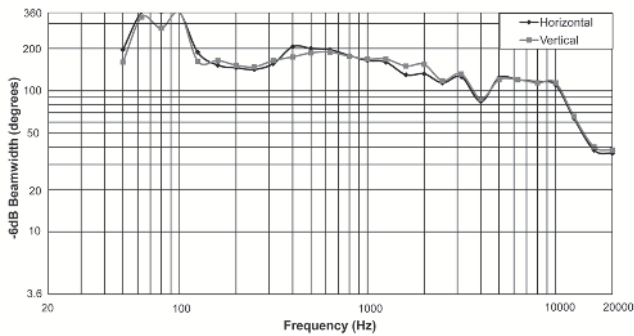

Directivity:

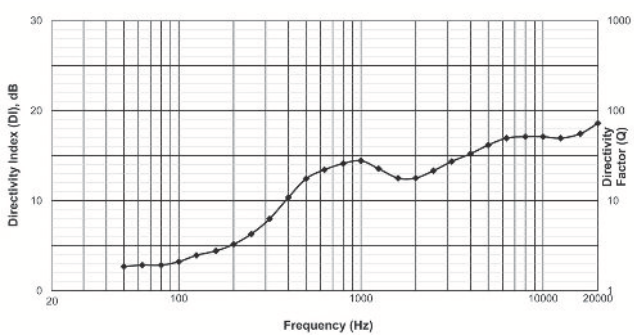

Dimensions:

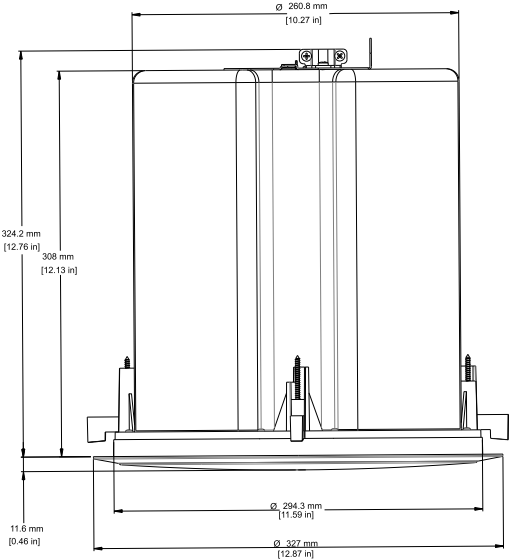

Certifications and approvals

Region	Certification
Europe	CE

## Parts included

Quantity	Component
2	Speaker systems
4	Tile rails
2	C-ring supports
2	Grilles
1	Installation Note
4	Support ring screws
2	Terminal connectors
1	Cutout template
2	Paint shields

## Ordering information

### 8" Ceiling Speaker System 100w

Ultra high performance 8-inch two-way ceiling mount loudspeaker system with concentric compression driver and integrated housing and mounting system (2 pcs), white

Order number **EVID-PC8.2**

### Accessories

#### RR-PC82 KIT, EVID PC8.2 ROUGH IN PLATE

Rough-in mounting plate for new construction for use with the EVID PC8.2 or EVID PC8.2E (4 pcs)

Order number **RR-PC82-B**

### Represented by:

#### Germany:

Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337  
USA

[www.electrovoice.com](http://www.electrovoice.com)