



IONIC 24

User Guide



Safety Instructions for IONIC 24



WARNING: ELECTRICAL HAZARD



To ensure your safety, please read this manual thoroughly before using the unit. Please observe these safety rules.

1. Keep this user guide for future reference.
2. Take notice of and comply with all warnings included in the user guide or indicated on the device itself.
3. Do not expose this unit to rain or moisture. Do not spill water or other liquids on this unit.
4. When cleaning the cabinet or other parts of this appliance, use only a dry or slightly damp soft cloth.
5. Do not block any ventilation openings or interfere with the proper ventilation of this unit. Install in accordance with the instructions.
6. Do not defeat the internal ventilation fans.
7. Do not use or store near any heat sources such as radiators, heat registers, stoves, or other heat-producing appliances.
8. Protect the power cord from being walked on or otherwise damaged by items placed on or against it. Particular attention should be given to the plugs, receptacles, and the point where the cord exits the appliance.
9. To avoid the risk of electrical shock, do not touch any exposed wiring while the unit is in operation.
10. Only use attachments/accessories specified by the manufacturer.
11. Unplug this unit and all connected electrical equipment during lightning storms or when left unused for a long period of time.
12. Refer all servicing to qualified service personnel. Servicing is required when the appliance has been damaged in any way or fails to operate normally.

For questions about safe installation, please contact us at www.waves.com.



RoHS
COMPLIANT



Contents

INTRODUCTION	4
HARDWARE AND CONNECTIONS	5
Front Panel	5
Rear Panel	6
Getting Started	7
Connect the Hardware	7
Download and Install Software	9
Configure the System	11
Status Indicators	12
Updating Firmware	13
Identifying a Device on the SoundGrid Network	13
Shared Devices on Multiple LV1 systems	13
IONIC 24 CONTROL PANEL	14
Input Page	15
Output Tab	17
Clock Tab	18
System Info Tab and About Tab	19
Presets	20
Device ID	20
PSU Indicator	20
RESETTING THE UNIT	21
SPECIFICATIONS	21
DIMENSIONS	23
Installing IONIC 24 in a Rack	24

Waves Inc
2800 Merchants Drive, Knoxville, TN 37912 USA
1-865-909-9200
www.waves.com



Introduction

The Waves IONIC 24 audio Interface is a stagebox for use with SoundGrid systems. It is particularly suited for eMotion LV1 live sound systems. IONIC 24 provides 24 channels of mic/line input on XLR/TRS combo connectors and 18 line-level outputs on XLR connectors. There are also XLR AES3 input and output connectors and two headphone jacks. Most I/O connections are from the front panel.

IONIC 24 features a new generation of Waves Signature Preamps: fast response; maximum headroom, and fully discrete analog circuits. A switchable harmonic enhancer adds analog warmth and harmonics without compromising punch or clarity. Preamp impedance is selectable between 2k ohms and 7k ohms.

IONIC operates within a SoundGrid system. Devices are connected to the eMotion LV1 application via Ethernet cables and can be up to 100 meters from the SoundGrid-compatible Ethernet switch. The 3U, 19" rack-mountable cabinet can be mounted in a flight case or rack. IONIC 24 has two power supply options: 100 V–240 V mains and a 24 VDC external power supply. Using them together provides auto-switching redundancy.

SoundGrid is the Waves high-speed networking protocol for moving audio, clock, and other information between a host system and I/O devices—and between I/O devices themselves. A SoundGrid host manages the network and assigns servers and I/O devices to mix, process, and record, depending on the host.

SoundGrid is scalable. Connect one I/O device to a DAW and you have a high-quality sound card. Add more I/Os and your system becomes more flexible and powerful. Depending on the application, a SoundGrid host can assign up to sixteen I/O devices. Complete SoundGrid systems can be networked together to share devices.



Hardware and Connections

Front Panel




● ————— ● ● ————— ●

Analog Inputs 1–24, XLR mic/line; TRS, line

SoundGrid status LED

|

Rear Panel

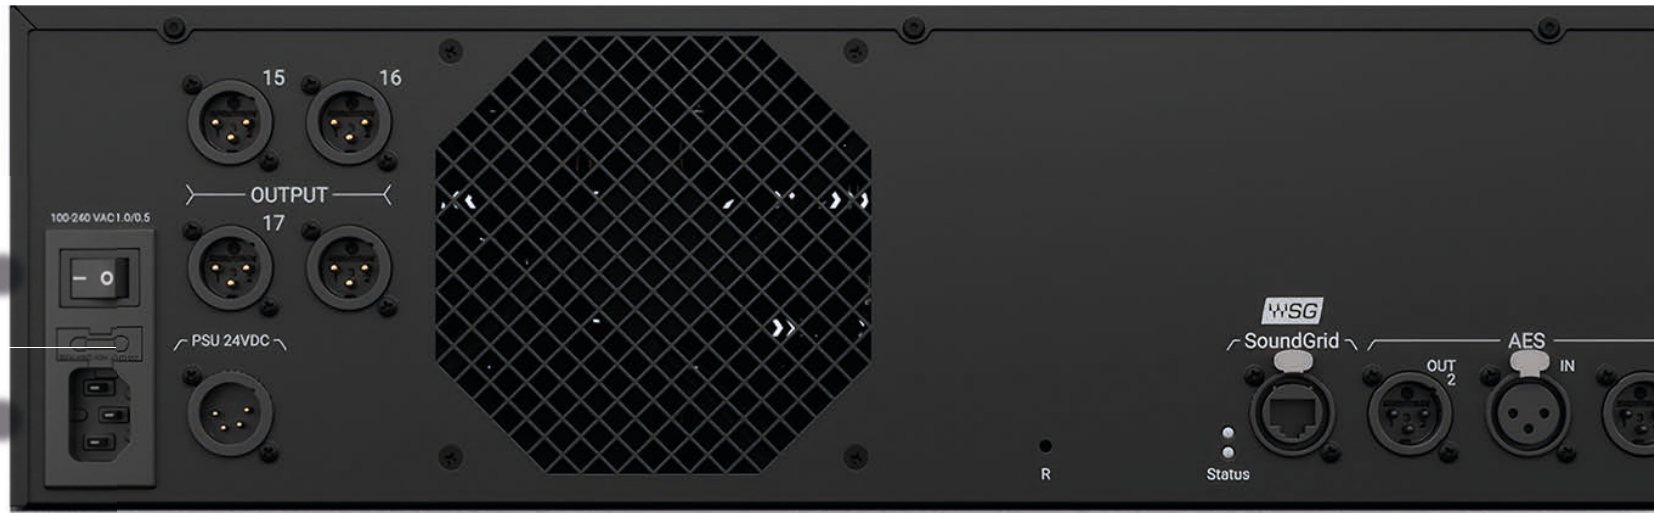

Power switch

firmware reset (for troubleshooting)

External power socket²

ES input and output



Warning

Before changing the fuse, confirm that the mains cable and the external power supply cables are

¹ Fuse: 2 amp slow blow

² External power supply: 24VDC / 4-pin XLR: pin 1 positive, pin 4 negative

Getting Started

An eMotion LV1 SoundGrid system consists of at least one I/O device and at least one server. The I/O provides bidirectional audio and clock, and the server powers the mixer and provides plugin processing for large plugin counts. These, along with the LV1 application, make up a SoundGrid network.


There are three steps in setting up a SoundGrid network:

1. Connect the I/Os and servers to the host computer via a SoundGrid-approved 1GB switch. Use Cat 5e (or better) Ethernet cables.
2. Install the eMotion LV1 software.
3. Configure all devices using the LV1 Inventory.

Refer to the eMotion LV1 User Guide for detailed information about connecting and configuring SoundGrid devices.

Connect the Hardware

The system below consists of an eMotion LV1, one server, and one IONIC 24 I/O Stagebox. This provides mic and line inputs onstage, as well as monitor channels. The devices are connected through the 1GB Ethernet switch.

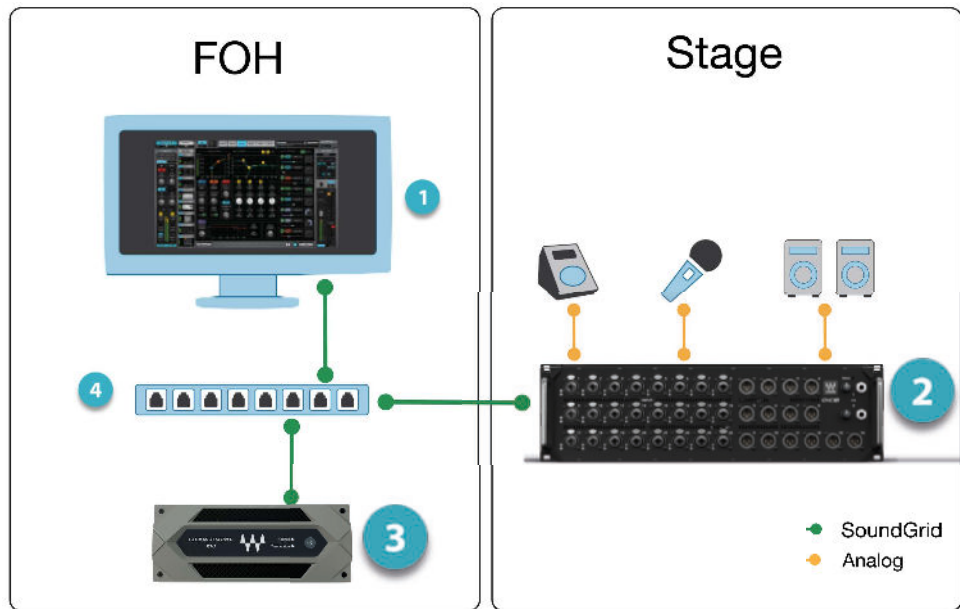

1

1 application

Connect one of the host computer's Ethernet ports to the switch. Use this port **ONLY** for the SoundGrid network—do not connect it to the internet or other networks.

IONIC 24 I/O Stagebox

Position the stagebox on stage. All I/Os can be up to 100 meters from the switch.

3

SoundGrid Server

The power of the server determines the plugin count.

4


1GB switch

Refer to the eMotion LV1 User Guide for an up-to-date list of approved SG switches, or visit this [support article](#).

EXPAND YOUR SYSTEM

You can assign up to 16 I/O devices to an LV1 system, depending on the number of channels per device, as well as your LV1 license. You can also add up to eight servers (max: four active servers and four redundant servers). Note that in this example there is an additional Ethernet switch onstage.

However large the system, basic hardware connections are always the same.

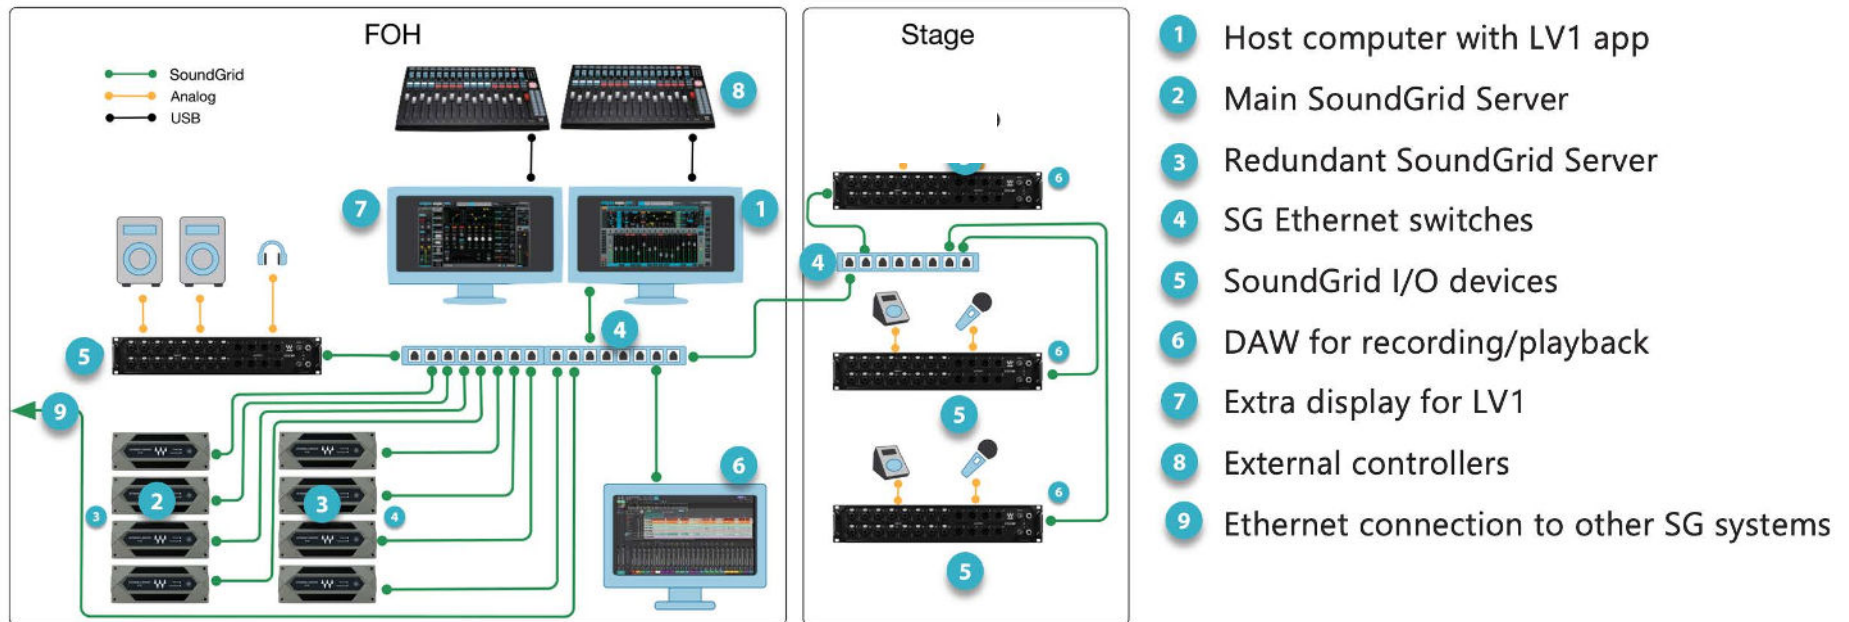


Download and Install Software

IONIC 24 operates in a SoundGrid environment, so a SoundGrid app (such as eMotion LV1) must be installed on the host computer. If a SoundGrid app is not currently installed, use Waves Central to install it. Waves Central is an app used to install all Waves software products and to manage licenses. If you don't have the Waves Central app, you can download it [here](#).

Installation is the same for all SG host apps. Here, we are using eMotion LV1 to illustrate three situations for installing or updating an SG host application or drivers.

LV1 CLEAN INSTALL

To install the current version of eMotion LV1 and the SG drivers, launch Waves Central and follow these steps:

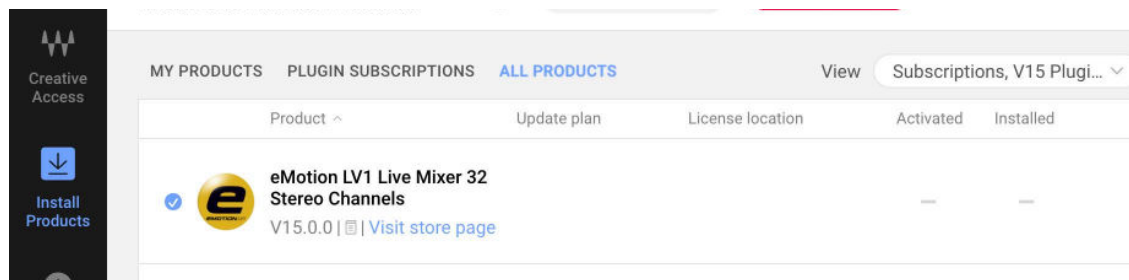


Select **Install Products**

Choose **All Products**

Search for the product by name

Select LV1 and click **Install**



If you have not activated your LV1 license, you can do so from the **Licenses** tab. Learn more from the [Waves Central User Guide](#).


When the installation is complete, you will be prompted to re-start your computer.

ADDING AN IONIC 24 TO AN EXISTING LV1 SYSTEM

When assigning a new IONIC 24 to an *existing* LV1 system, you probably won't need to do anything special. Since all SG drivers are installed when you install a SoundGrid host, the device should be available for assignment. If, however, the driver is damaged or missing, you can reinstall it from Waves Central. There are two ways to go about this.

Update LV1 to Latest Version

This updates LV1 and all drivers to the current version.

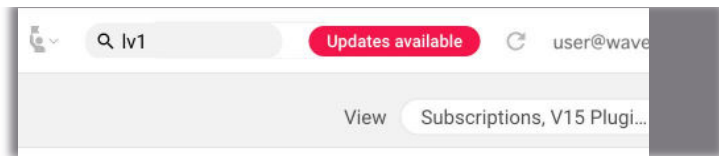


Go to Waves Central. If updates are available, it will be indicated at the top of the window.

Click **Update** on the right panel.

Install Drivers Only

You can install or update drivers without updating LV1 to a newer version.

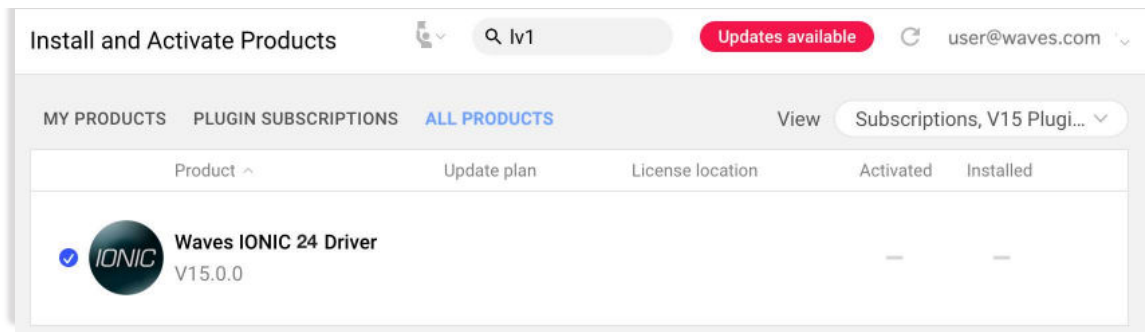

Go to Waves Central.

Search for and select the IONIC 24 driver.


Install.

LICENSES

You do not need a license to use IONIC 24. However, many hosts or specific host configurations do require a license. Refer to the [LV1 product page](#) for details. Plugins and bundles likely require licenses.


Configure the System

A SoundGrid network is configured in the LV1 **Setup** window. At the heart of this page are racks where devices are assigned. This is the **Inventory**. Any compatible device that's part of the host's SoundGrid network, or shared across other SoundGrid networks, will be available for assignment.

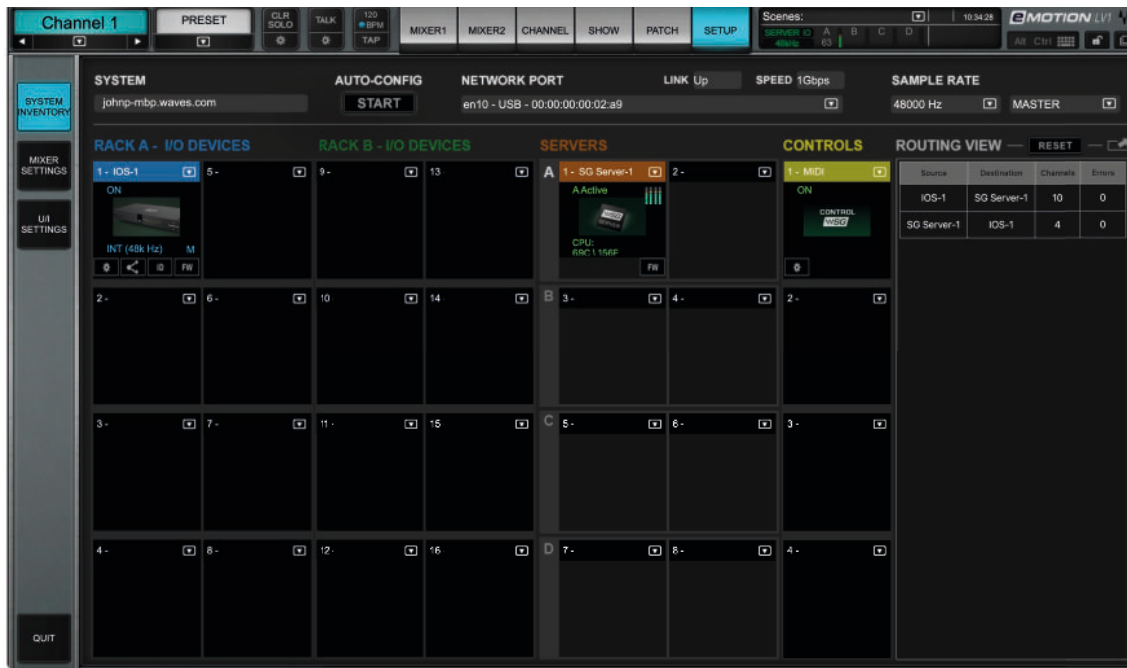

CONFIGURING DEVICES AUTOMATICALLY

The first time you launch LV1, click Auto-Config to configure all your devices. For most configurations, this is sufficient.



If you later want to add devices or rearrange your inventory, run **Auto-Config** from the System Inventory page. Auto-Config identifies the computer's Ethernet port that is attached to the SoundGrid network. Next, it scans the SoundGrid network for devices. It then assigns devices and patches them to the host. We recommend that you let Auto-Config take care of device assignment, at least for your initial setup.

MANUAL DEVICE CONFIGURATION



You can assign, remove, and manage a device manually. Click on the **arrow** symbol in a device slot (circled here in yellow) to open the **Device Menu**, then select an IONIC 24 from the Network Devices submenu. If more than one IONIC 24 is connected to the SoundGrid network, each will appear in the Device Menu. Any device that is not already in use will be available for assignment (“Free”). If no other devices are assigned, the current device will become your clock master.

The local computer can be assigned from the Network Device menu. Drivers and servers are assigned in the same manner. See the LV1 user guide for specific instructions about device assignment, I/O channel patching, and clock.

Status Indicators

The LED on the front panel of IONIC 24 indicates network status.

- Flashing Red** Device is ON, but not connected to a system (host).
- Blue** ID light that is triggered by the panel that is controlling the device. This identifies the hardware.

LEDs on the rear panel show the speed/standard of the Ethernet connection.

Updating Firmware

The color of the **FW** button in a device slot indicates the current firmware status. To update firmware, click on the FW button. Do not disconnect the device or turn off the computer before **Done** appears.

Once the update is ready, turn the device off and on to reset it. If a driver is missing or damaged, you may need to reinstall it from Waves Central (see page 10).



Grey	Compatible firmware

Identifying a Device on the SoundGrid Network



Click the **ID** button to activate a hard-to-miss LED on the panel of the corresponding hardware device. You can also activate the LED from the top bar of the device's control panel.

Shared Devices on Multiple LV1 systems.

Multiple eMotion LV1 systems can join together to form a *super system*. I/O devices can be shared among these systems. Individual I/O channels can be assigned across the network, and preamps can be controlled from any LV1 in the network.

Consult the eMotion LV1 user guide for details.

IONIC 24 Control Panel


There are two ways to open the device control panel:

FROM THE DEVICE RACK

Click on the **Gear** button on a device in the rack slot.



FROM THE DRIVER CONTROL PANEL

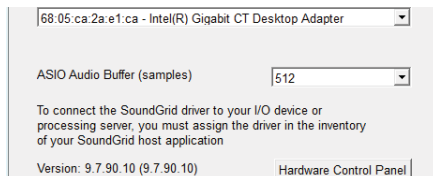


Open the driver control panel and then click the Hardware Control Panel button. The driver control panel is located here in the host computer:

PC: C:\Program Files (x86)\Waves\SoundGrid\Driver Control Panel

Mac: System HD/Applications/Waves/SoundGrid


CONTROL PANEL PAGES



The **Clock**, **Input**, and **Output** pages are used to set up and manage the unit. The **About** and **System Info** pages provide information about the unit, such as MAC address, SOE master, firmware version, and more.

Input Page

The Input tab is used to configure the device's 24 analog mic/line inputs.

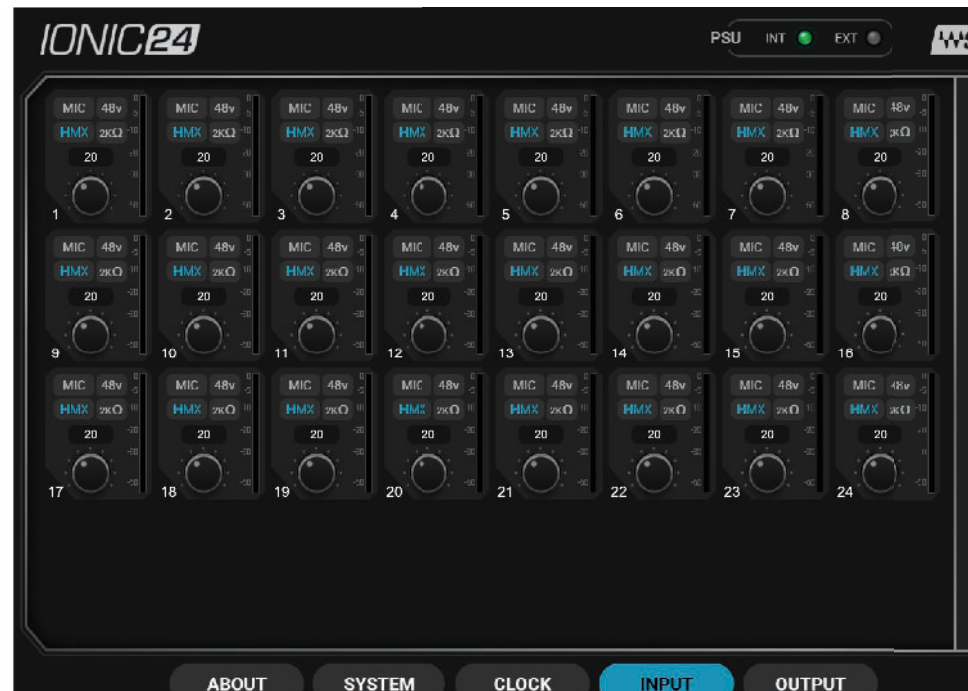


mp controls

Presets: load and save

input meters

Clip level indicator selector


PREAMP CONTROLS



Mic/Line	Sets input level mode for mic or line inputs. Mic: Enables input level adjustment (-3 dB to +60 dB), for both XLR and TRS. Line: Gain is fixed. XLR is set to 0 dB, 7k ohms. TRS set to -6 dB pad, 14.6k ohms.
48 v	Phantom power: on or off
Mic impedance	Sets mic impedance: 2k ohms or 7k ohms. This enables proper pairing of the mic to the preamp. Some mics work better at a lower impedance, others at a higher one. To a certain extent, 2k ohms was the classic impedance during the '70s, '80s, '90s. Beyond the 2000s, 7k ohms predominates. It is more linear and there is less signal loss, especially if you perform analogue splits before the preamp. However, it's not cut and dry: there is a slight sound difference between the two impedances. Except where the impedance choice is obvious, it's best to experiment with these two options.
HMX	Turns Waves Harmonic Enhancer on or off. Harmonic enhancement usually results in a more natural-sounding, warmer sound, as found in classic analog equipment. Bypass HMX for a more neutral sound.

The AES signal's sample rate is always converted to match the sample rate of the IONIC 24 device.

INPUT LEVEL ADJUST



Controls the gain of the IONIC 24 preamps. Small values are used for line inputs, large for mic inputs. Range: 0 dB to 60 dB in steps of 1 dB

A setting of 0 allows a +24 dB input without clipping. A setting of +20 dB allows a +4 dB input without clipping. The channel number is shown to the left of the control; the current gain is indicated in the box above.

Clip sets the meter level at which the clip LED will light. It does not affect the gain, only the meter display.




LEVEL ADJUST

Use the Clip Level drop-down menu to set the level at which clipping will be indicated by the LED in the meter. This does not affect the level of the audio, only the point at which clipping is indicated.

Range: -6 dB to 0 dB

Output Tab

There are 18 line out

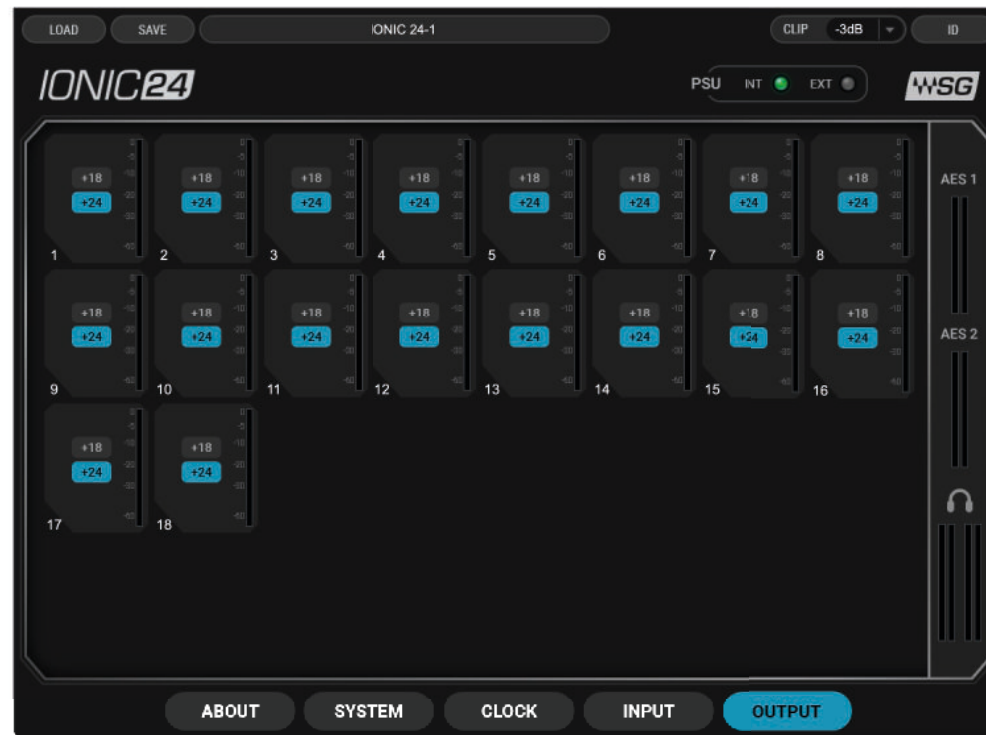


ES output meter

Level indication only; no input control

Clock Tab

Use the **Clock** tab to manage the clock relationship between the IONIC 24 and the SoundGrid network. The following image shows IONIC 24 locked to the network via Sync Over Ethernet (SOE). The device can also serve as the SOE clock master.

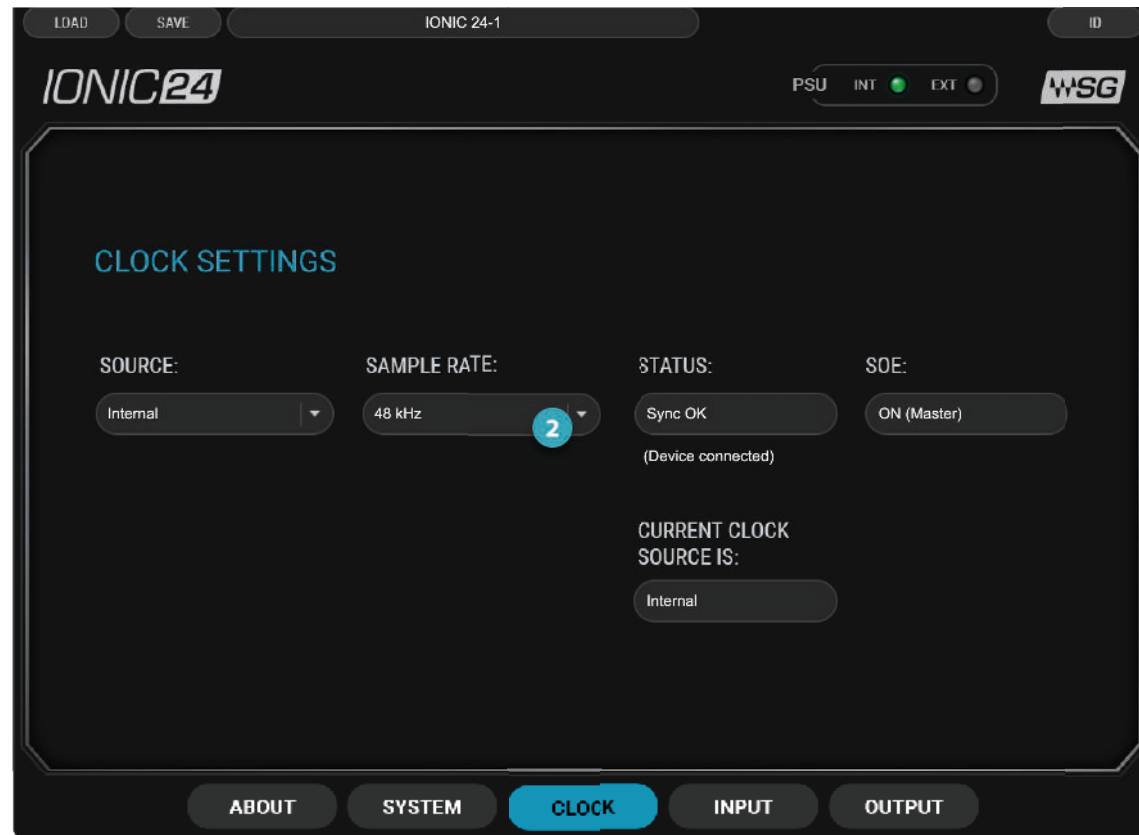

Source Select	Request a clock source. If this source is not available, IONIC 24 will poll all other potential clock sources. If there are no available clock sources, IONIC 24 will swi
---------------	---

Sample Rate	network). When IONIC 24 is not the clock master, this window displays the SOE network sample rate.
Current Clock Source	Indicates the actual current clock source. If the device is unable to sync to the requested clock, this displays the fallback.

System Info Tab and About Tab


The **About** page contains a description of the device. The **System Info** tab contains technical details about the device, including MAC address, firmware version, and module version. This information is useful for troubleshooting. Please have this information handy if you contact Waves technical support concerning the device.




Presets



You can save and load presets of device settings. A saved preset includes all parameters in the Clock and Control panels. Save IONIC 24 presets to use on future sessions or copy them to another computer to duplicate a configuration.

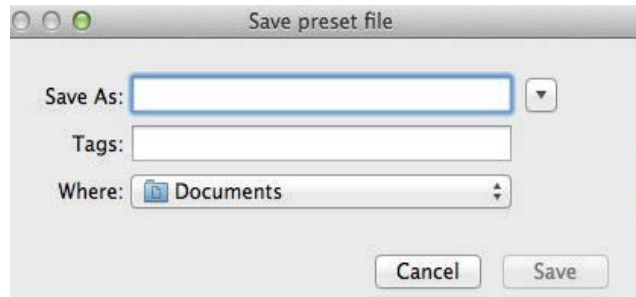

Device ID



Click the **ID** button to identify the IONIC 24 device that relates to this control panel. A flashing, multi-colored light on the front panel of the device will remain lit until you turn off the ID button.

PSU Indicator

This indicates the IONIC 24 power source and status.



110 v to 240 v internal power supply

Redundant 24 VDC external power supply; four-pin XLR— pin 1 negative, pin 4 positive

- A green LED indicates that the corresponding PSU is operating properly.
- Red means a fault.
- Blank indicates that the unit is not present (e.g., not connected, switched off).



Resetting the Unit

If an unsuccessful firmware update results in the device no longer being recognized by the host, follow these steps to reset the unit:

1. Turn off the unit.
2. Press and hold the Reset button (rear panel).
3. Restart the unit while holding the button.
4. Release the Reset button once the device has fully booted.

The unit is now in “force update” mode and a new firmware update can be performed. If your device does not have a reset button, please contact Waves technical support.

Specifications

Sample Rate	44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz
Microphone / Line input	<ul style="list-style-type: none">• Input Gain: adjustable from -3 dB to +60 dB in steps of 1dB, default +20 dB• Frequency response: (+18 dBu input)<ul style="list-style-type: none">+/- 0.1 dB, 20 Hz to 20 kHz+/- 1.0 dB, 10 Hz to 40 kHz• Dynamic range: >110 dB (20 kHz BW, 0 dB Gain)• EIN -130 dBu (gain 60 dB, 0 ohms source, A-weighted)• THD+N -100 dB (997 Hz, +18dBu source, 0 dB Gain, 20kHz BW)• Input impedance:<ul style="list-style-type: none">• XLR: 2k ohms / 7k ohms, selectable per input• TRS: 14.6k ohms• Input Sensitivity:<ul style="list-style-type: none">• XLR: -33 dBu to +27 dBu, adjustable in 1 dB steps• TRS: -27 dBu to +33 dBu, adjustable in 1 dB steps• CMRR: 50 dB (20 Hz to 1 kHz, 0 dB gain)



	<ul style="list-style-type: none"> • Crosstalk: > 90 dB (20 Hz to 20 kHz, +27 dBu input, 0 dB gain) • 48V phantom power switchable per input • HMX - Harmonic Enhancer, switchable per input • Front panel signal presence and clip indicator, per channel
Line output	<ul style="list-style-type: none"> • Maximum output level: +18 dBu or + 24 dBu, switchable per output • Frequency Response: <ul style="list-style-type: none"> +/- 0.1 dB, 20 Hz to 20 kHz @ 48 kHz SR +0.1 / -1.0 dB, 10 Hz to 40 kHz @ 96 kHz SR • THD+N: -100 dB @ +24 dBu, -105 dB @ +18 dBu (997 Hz, 20 kHz BW) • Crosstalk: > 90 dB (20 Hz to 20 kHz) • Residual output noise: -87 dBu (A-Weighted) • Output impedance: 150 ohms
Phones output	<ul style="list-style-type: none"> • Adjustable output gain • Frequency Response: <ul style="list-style-type: none"> +/- 0.1 dB, 20 Hz to 20 kHz @ 48 kHz SR +0.1 / -1.0 dB, 10 Hz to 40 kHz @ 96 kHz SR • THD+N: -80 dB (3V @ 30 ohms load, 997 Hz, 20 kHz BW) • Output impedance: 20 ohms
AES3	<ul style="list-style-type: none"> • Input / Output impedance: 110 ohms • Input SR with auto conversion (SRC) • Output SR support: 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz
SoundGrid	Ethernet 1GB
Power	100 V–240 V auto-switching PSU 0.5 amp / 0.25 amp, Redundant PSU 24 VDC external input
Operating Temperature	0 to 35 degrees Celsius (32 to 95 degrees Fahrenheit)


Specifications are subject to change without notice.



Dimensions

W x D x H	482.1 mm (w) x 310.8 mm (d) x 131.4 mm (h) (19 in x 12.2 in x 5.2 in) excluding handles.
Weight	6.7 kg (14.8 lbs)

IONIC 24 is intended for rack installation and is sized accordingly. Dimensions below are in millimeters.

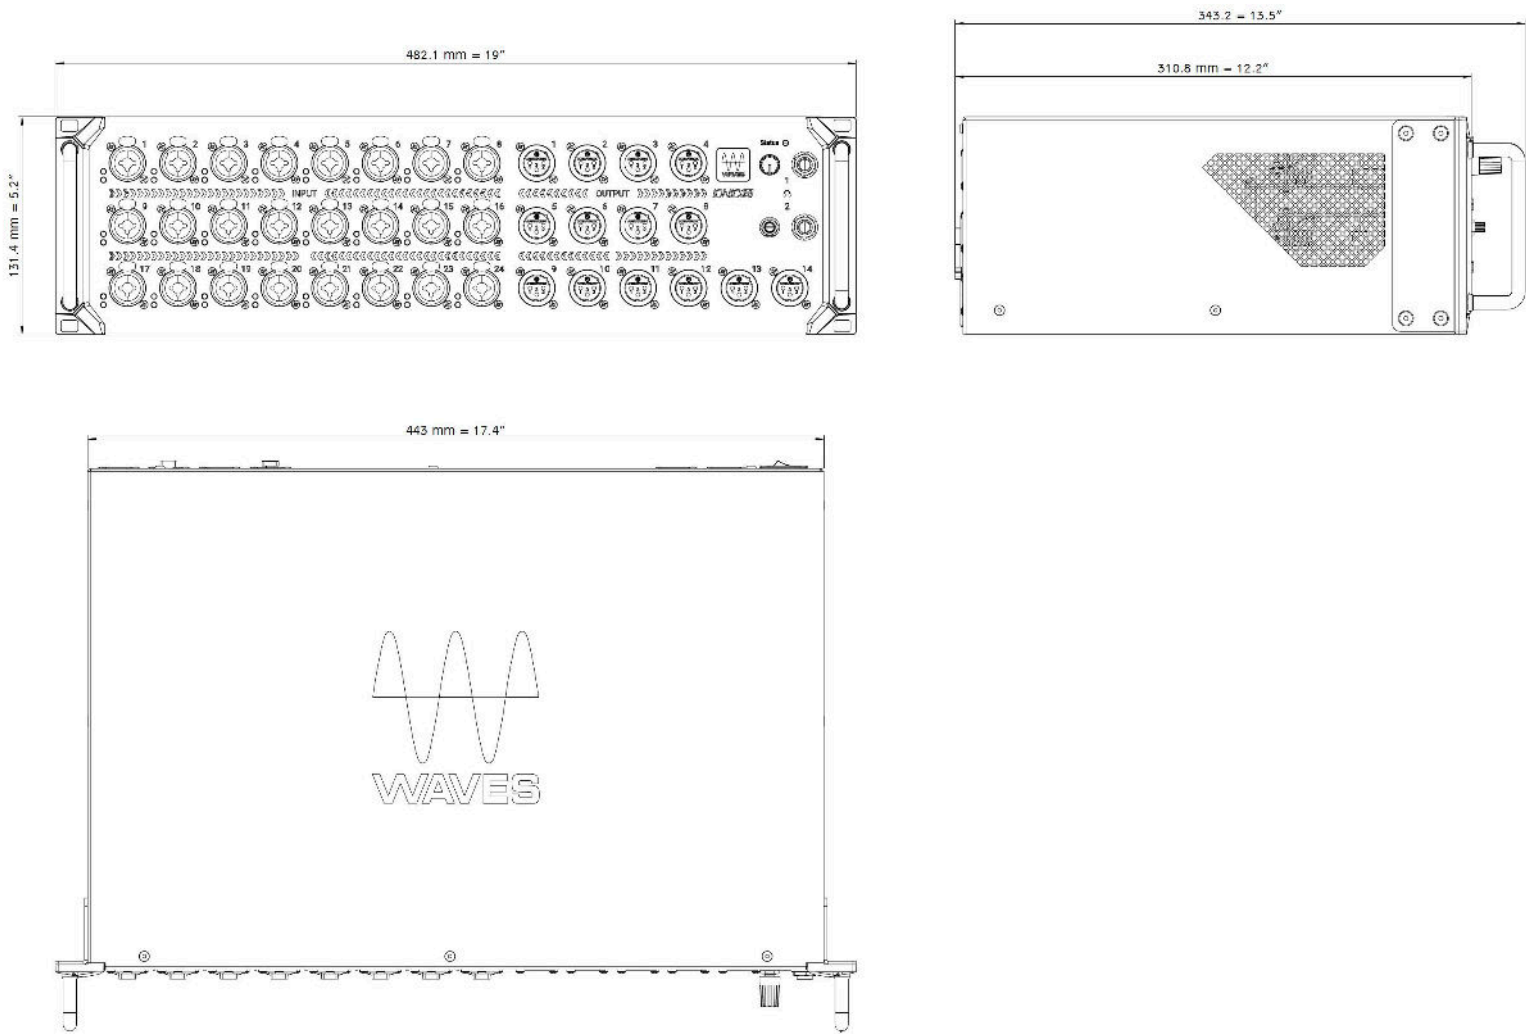

Installing IONIC 24 in a Rack

Care must be taken when mounting the IONIC 24 on a rack rail. Improper screw alignment or incorrect screws can damage the device and possibly cause injury.

Four screws are needed to rack the device. We recommend using M5 or M6 screws, depending on the rack specifications. IONIC 24 is supplied with handles attached. You can remove these prior to installation, if needed.

DEFINED 2U SPACE ALONG THE RAIL:

INCORRECT INSTALLATION
SIDE HOLES DON'T ALIGN WITH THE RACK'S HOLES

CORRECT INSTALLATION
SIDE HOLES ALIGN WITH THE RACK'S HOLES

