



# TTS 15-A

ACTIVE HIGH POWER SUBWOOFER



**Description** The RCF TTS 15-A is a compact, high output subwoofer module ideal in combination with TT+ two way touring systems. The RCF TTS 15-A features low weight for easy handling, weatherproof cabinet, a 15" woofer powered by a 1100 watt RMS SMPS class-D Amplifier with full DSP and RDNet network capabilities

- Features**
- › 134 dB SPL Max
  - › 40-400 Hz Frequency Range
  - › 1 x 15" woofer
  - › DSP Controlled Input Section with selectable presets (e.g.cardioid)
  - › 1100W RMS Class-D Amplifier
  - › RDNet remote monitoring and control
  - › Vertical and horizontal placement with M20 pole receptacle on top and side
  - › Baltic Birch Cabinet


|                    |                   |    |          |       |                   |
|--------------------|-------------------|----|----------|-------|-------------------|
| <b>Part Number</b> | 13000543 TTS 15-A | EU | 90-240 V | Black | EAN 8024530015381 |
|                    | 13000969 TTS 15-A | US | 90-240 V | Black | EAN 8024530023515 |



# TTS 15-A

ACTIVE HIGH POWER SUBWOOFER

Line Art 2D

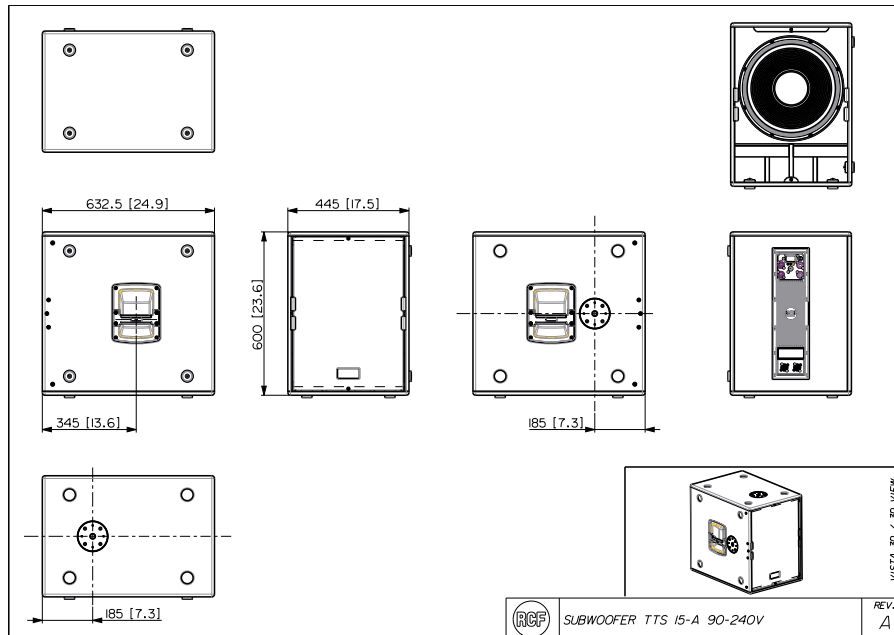

## TECHNICAL SPECIFICATIONS

|                           |                       |                                   |
|---------------------------|-----------------------|-----------------------------------|
| Acoustical specifications | Frequency Response    | 40 Hz ÷ 400 Hz                    |
|                           | Max SPL @ 1m          | 134 dB                            |
| Transducers               | Woofer                | 1 x 15", 3.0" v.c                 |
| Input/Output section      | Input signal          | bal/unbal                         |
|                           | Input connectors      | XLR, RDNet Ethercon               |
|                           | Output connectors     | XLR, RDNet Ethercon               |
|                           | Input sensitivity     | +4 dBu                            |
| Processor section         | Hi-Pass Frequencies   | 40 Hz, 50 Hz                      |
|                           | Low-Pass Frequencies  | Variable from 60 Hz to 400 Hz     |
|                           | Protections           | Thermal, RMS                      |
|                           | Limiter               | Fast Limiter                      |
|                           | Controls              | Gain, Eq, Prest Switch, Out Delay |
|                           | RDNet                 | Onboard                           |
| Power section             | Total Power           | 2200 W Peak, 1100 W RMS           |
|                           | Cooling               | Convection                        |
|                           | Connections           | Powercon IN/OUT                   |
| Standard compliance       | Safety agency         | CE compliant                      |
| Physical specifications   | Cabinet/Case Material | Baltic birch plywood              |
|                           | Hardware              | 2 x M20                           |
|                           | Handles               | 2 Side                            |
|                           | Pole mount/Cap        | M20 thread                        |
|                           | Grille                | Steel                             |
|                           | Color                 | Black                             |
| Size / Weight             | Height                | 600 mm / 23.62 inches             |
|                           | Width                 | 445 mm / 17.52 inches             |
|                           | Depth                 | 633 mm / 24.92 inches             |
|                           | Weight                | 36.5 kg / 80.47 lbs               |



# TTS 15-A

ACTIVE HIGH POWER SUBWOOFER

|                    |                         |                   |                            |
|--------------------|-------------------------|-------------------|----------------------------|
| Rigging / Mounting | <b>ACCESSORIES</b>      |                   |                            |
|                    | <b>POLE MOUNT KITS</b>  |                   |                            |
|                    | 13360232                | AC PMX            | EAN 8024530010058          |
|                    | 13360067                | PM-KIT M20        | Black<br>EAN 8024530014599 |
| Protections        | <b>STACKING KITS</b>    |                   |                            |
|                    | 13360231                | STCK-KIT SUB 8006 | Black<br>EAN 8024530018672 |
| Transportation     | <b>COVERS</b>           |                   |                            |
|                    | 13360395                | CVR TTS 15        | Black<br>EAN 8024530015459 |
| Cables             | <b>KART WITH WHEELS</b> |                   |                            |
|                    | 13360383                | KRT-WH TTS 15     | Black<br>EAN 8024530014995 |
|                    | <b>CABLES KIT</b>       |                   |                            |
|                    | 13360102                | AC XLR 3M3F       | EAN 8024530006402          |