



TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR



Description

The TT25-CXA is a full range, high performance coaxial monitor. The linear response curve, the consistent coverage and acoustic output make the TT25-CXA II the professional choice for most demanding situations. The voicing is accurate and deep, the sound is transparent in the mids and extremely accurate at very high frequencies. The size is compact and the profile is very low for a discreet appearance. The TT25-CXA is a high power active system that sets a new standard in the touring and theatre sound reinforcement. By producing flat amplitude and phase response, full-range bandwidth and exceptional impulse response, the TT25-CXA far exceeds the capabilities of conventional stage monitors.

Features

- › 1100 W Class D Amplifier
- › 60 x 60 constant directivity coverage angle
- › 15" neo coaxial woofer, 3.5" voice coil
- › 1.5 " neo coaxial c. driver, 2.5" voice coil
- › DSP Processing
- › Onboard RDNet Control
- › Multifunctional cabinet
- › Very high output

Part Number

13000448 TT 25-CXA
13000449 TT 25-CXA

220-240 V
115 V

Black
Black


EAN 8024530012977
EAN 8024530013028



TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR

Line Art 2D

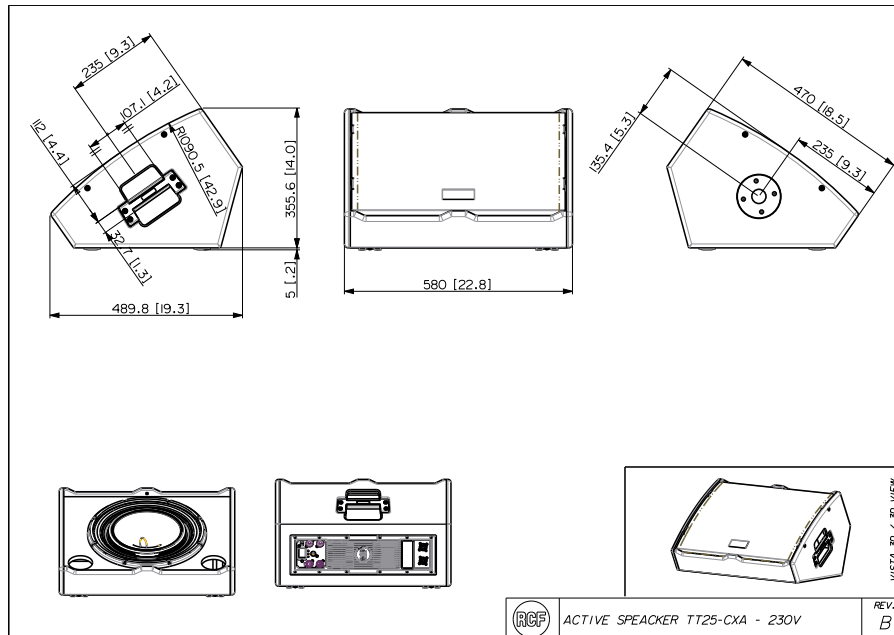

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz ÷ 20000 Hz
	Max SPL @ 1m	133 dB
	Horizontal coverage angle	60°
	Vertical coverage angle	60°
Transducers	Compression Driver	Coaxial 1.5" neo, 2.5" v.c
	Woofer	Coaxial 15" neo, 3.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	900 Hz
	Protections	Thermal, HF
	Limiter	Soft Limiter
	Controls	Proces., 8 sel. presets
Power section	RDNet	Onboard
	Total Power	2200 W Peak, 1100 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1600 W Peak, 800 W RMS
Standard compliance	Cooling	Convection
	Connections	Powercon IN/OUT
	Safety agency	CE compliant
	Cabinet/Case Material	Baltic birch plywood
Physical specifications	Handles	1 Top
	Grille	Steel
	Color	Black
Size / Weight	Height	353 mm / 13.9 inches
	Width	580 mm / 22.83 inches
	Depth	486 mm / 19.13 inches
	Weight	18 kg / 39.68 lbs



TT 25-CXA

ACTIVE HIGH DEFINITION COAXIAL MONITOR

Rigging / Mounting	ACCESSORIES		
	FLOOR STANDS		
	13360109	AC PRO-FS	Black
			EAN 8024530006471
Protections	POLE MOUNT KITS		
	13360232	AC PMX	
			EAN 8024530010058
	13360110	AC PRO-PM	Black
Cables			EAN 8024530006488
	13360067	PM-KIT M20	Black
			EAN 8024530014599
	COVERS		
	13360327	CVR TT 25-CXA	Black
			EAN 8024530013448
	CABLES		
	12399019	CBL ETHERCON TO XLR F 0.2M	Black
			EAN 8024530013882
	12399020	CBL ETHERCON TO XLR M 0.2M	Black
			EAN 8024530013899
	CABLES KIT		
	13360102	AC XLR 3M3F	
			EAN 8024530006402
	12399016	CBL ETHERCON 0.7M	Black
			EAN 8024530013844
	12399017	CBL ETHERCON 1.5M	Black
			EAN 8024530013851
	12399035	CBL ETHERCON 3M	Black
			EAN 8024530013868
	12399018	CBL ETHERCON 5M	Black
			EAN 8024530013875